

Shower Rods Technical Specification


Shower Rod Sets – Exposed Screw

63SS, 63HD

Stock Numbers:

- q **63-5-SS – 5' Stainless Steel Shower Rod Set**
 Chrome Finish
 1" Diameter Smooth Rod
 Exposed Screw Mounting
 Flanges (63-F)
- q **63-6-SS – 6' Stainless Steel Shower Rod Set**
 Chrome Finish
 1" Diameter Smooth Rod
 Exposed Screw Mounting
 Flanges (63-F)
- q **63-5-HD – 5' Stainless Steel Shower Rod Set**
 Chrome Finish
 1" Diameter Heavy Duty Rod
 Exposed Screw Mounting
 Flanges (63-F)
- q **63-6-HD – 6' Stainless Steel Shower Rod Set**
 Chrome Finish
 1" Diameter Heavy Duty Rod
 Exposed Screw Mounting
 Flanges (63-F)

Dimensions:

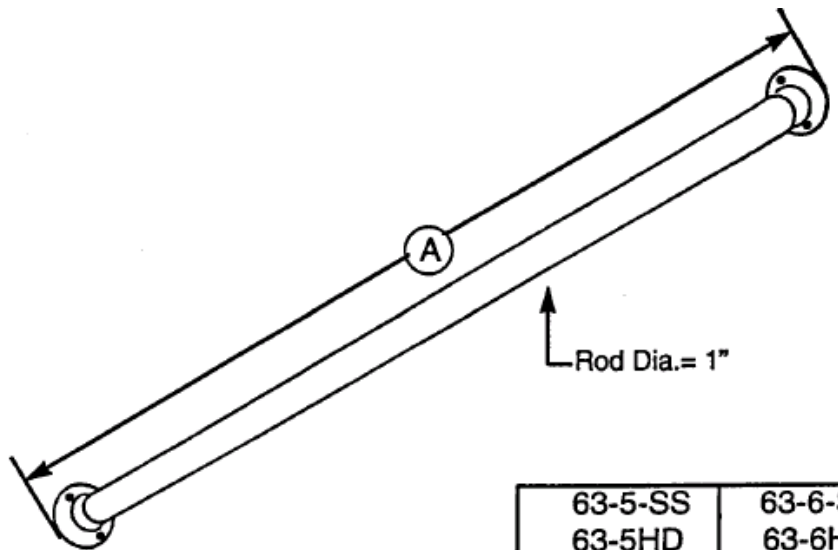

	63-5-SS	63-6-SS
	63-5HD	63-6HD
A	60"	72"

(For flange dimensions, see 63-F Technical Specification)

Materials:

"SS" Shower Rods are chrome plated 28-gauge stainless steel.

"HD" Shower Rods are chrome plated 20-gauge stainless steel.

See Technical Specification for 63-F for information on the included flanges.

Installation Instructions:

1. Place flanges on both ends of shower rod.
2. Position rod assembly in desired location.
3. Mark location of mounting holes for both flanges.
4. Drill starter holes.
5. Attach left bracket to wall using 2" screws (provided).
6. Insert rod and right bracket assembly into left bracket.
7. Slide right bracket against wall and attach with 2" screws (provided).

Note: Wood blocking is preferable behind all wall surfaces. If wood blocking is not available, the following optional fasteners are suggested: Tile/Masonry – Plastic or Lead Anchors; Plaster/Drywall – Toggle Bolts

Stock Number: _____ Shower Rod
 By CSI Bath Furnishings

