

## FAUCET DESCRIPTION

- Metal construction with a chrome plated or decorative glacier or sand finish
- Dual position spout
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

## OPERATION

- Lever style handle
- Temperature controlled by 180° arc of handle travel
- Will operate with less than 5lbs. of force

## FLOW

- Aerator is limited to 2.2 gpm (8.3 L/min) @ 60 psi and 2.5 gpm (9.5 L/min) @ 80 psi
- Dual position swivel spray design
- Choice of aerated stream or spray position

## CARTRIDGE


- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Is capable of correcting reversed piping and can accommodate back to back installations

## STANDARDS

- The faucet is third party certified by CSA to meet the following: CSA B-125, ASME A112.18.1M and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A17.1
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

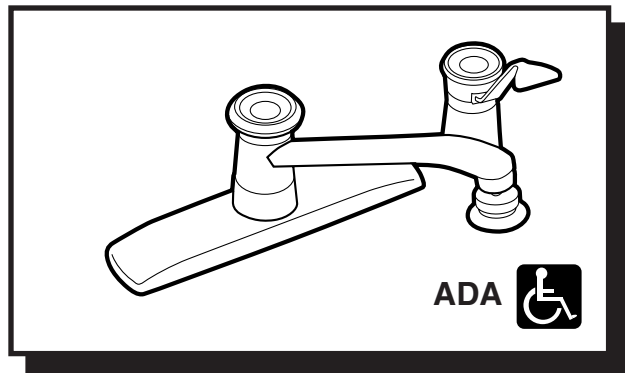

## LEGEND®


### Single-Handle Riser® Kitchen Faucet w/Swivel and Spray Aerator

Models: 7345, \*7345S, \*7345W

\* Model is Discontinued 2/1/2000

**NOTE:** See reverse side  
for illustrated parts

**NOTE:** FAUCET IS SHOWN WITH  
ESCUTCHEON, IF ESCUTCHEON IS NOT  
USED, FAUCET MAY BE INSTALLED THROUGH  
2 HOLES 1-1/4" (32mm) MIN. DIA. AND 4"  
(102mm) to 8" (203mm) on center.

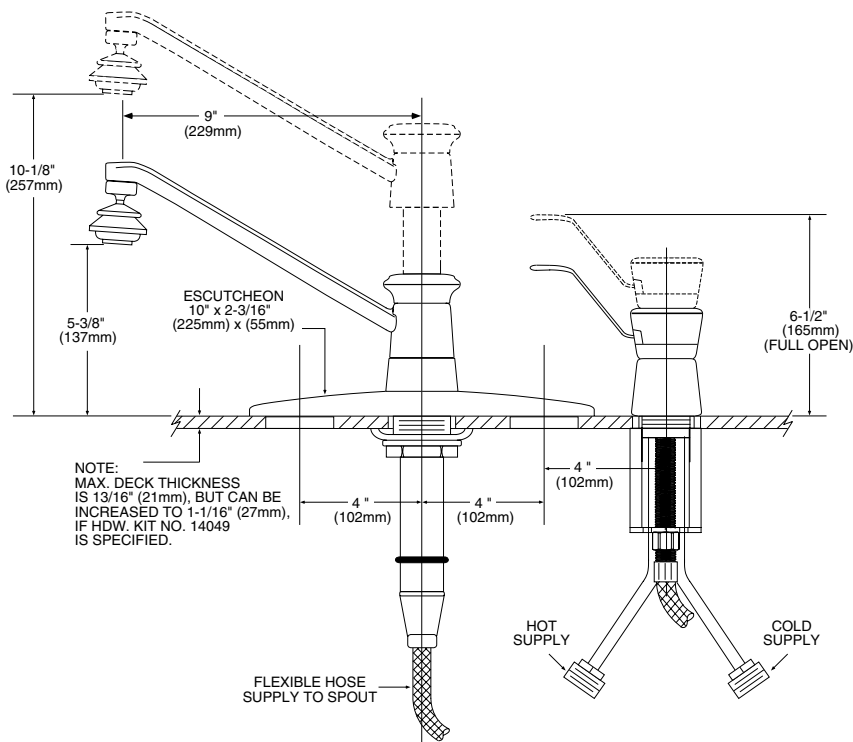

## CRITICAL DIMENSIONS

(DO NOT SCALE)

## FAUCET DESCRIPTION

- Metal construction with a chrome plated or decorative glacier or sand finish
- Dual position spout
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing

## OPERATION

- Lever style handle
- Temperature controlled by 180° arc of handle travel
- Will operate with less than 5lbs. of force

## FLOW

- Aerator is limited to 2.2 gpm (8.3 L/min) @ 60 psi and 2.5 gpm (9.5 L/min) @ 80 psi
- Dual position swivel spray design
- Choice of aerated stream or spray position

## CARTRIDGE


- 1225 cartridge design
- Nonmetallic/nonferrous and stainless steel material
- Is capable of correcting reversed piping and can accommodate back to back installations

## STANDARDS

- The faucet is third party certified by CSA to meet the following: CSA B-125, ASME A112.18.1M and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act

## WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

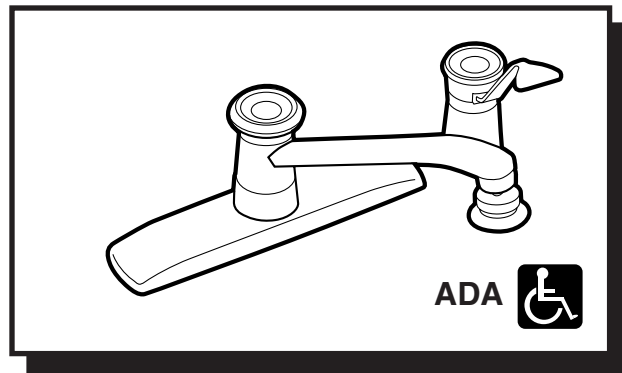

## LEGEND®


### Single-Handle Riser® Kitchen Faucet w/Swivel and Spray Aerator

Models: 7345, \*7345S, \*7345W

\* Model is Discontinued 2/1/2000

**NOTE:** See reverse side for illustrated parts

**NOTE:** FAUCET IS SHOWN WITH ESCUTCHEON, IF ESCUTCHEON IS NOT USED, FAUCET MAY BE INSTALLED THROUGH 2 HOLES 1-1/4" (32mm) MIN. DIA. AND 4" (102mm) to 8" (203mm) on center.

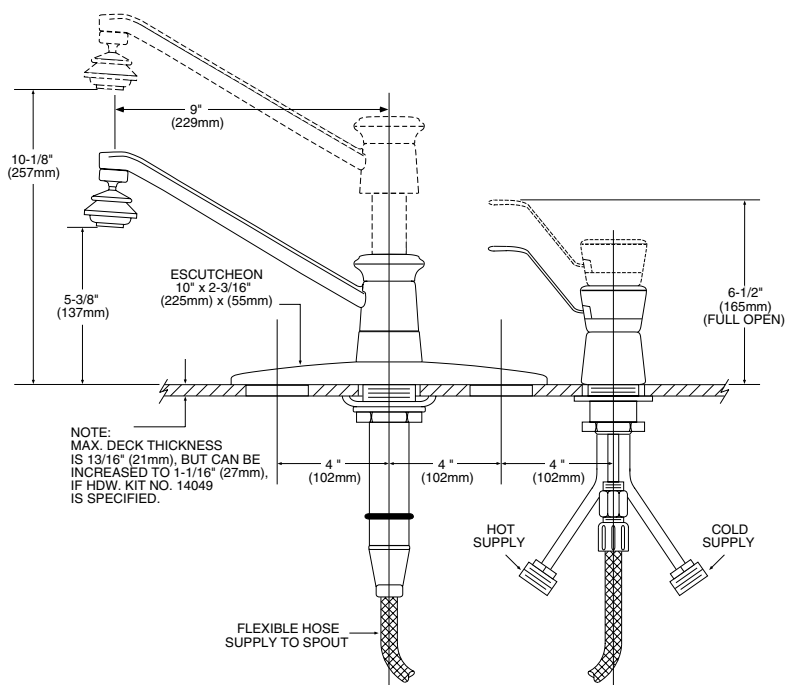

## CRITICAL DIMENSIONS

(DO NOT SCALE)