

FAUCET DESCRIPTION

- Metal construction with chrome plated, decorative glacier, sand, Ivory and LifeShine® polished brass, or stainless finishes
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Includes Protégé side spray

OPERATION

- Lever style handle
- Temperature controlled by 130° arc of handle travel
- Will operate with less than 5 lbs. of force

FLOW

- Aerator is limited to 2.2 gpm (8.3 L/min).

CARTRIDGE


- 1225 cartridge design (not 1200)
- Nonmetallic, nonferrous and stainless steel material

STANDARDS

- Designed and manufactured to comply with the requirements of: CSA B-125, ASME A112.18.1M, and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1.
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

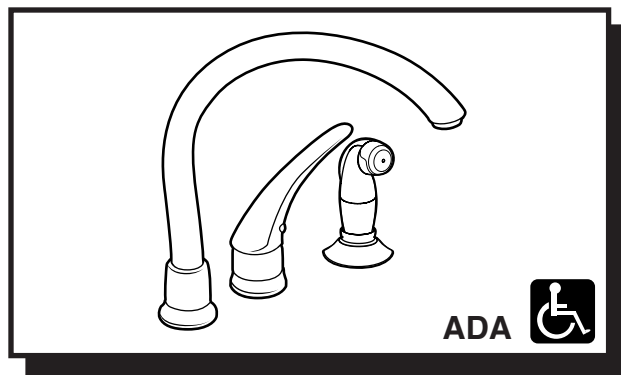


MONTICELLO® with Cathedral™ Spout Single-Handle Kitchen Faucet with Protégé Side Spray

**Models: 7730, 7730W, 7730S,
7730SL, 7730P, 7730V,
87730, 87730SL, 87730V, 87730W**

**NOTE: See reverse side
for illustrated parts**

**Spout, Handle, & Hose Spray install through deck
holes a minimum of 1-1/4" (32mm) in
diameter.**

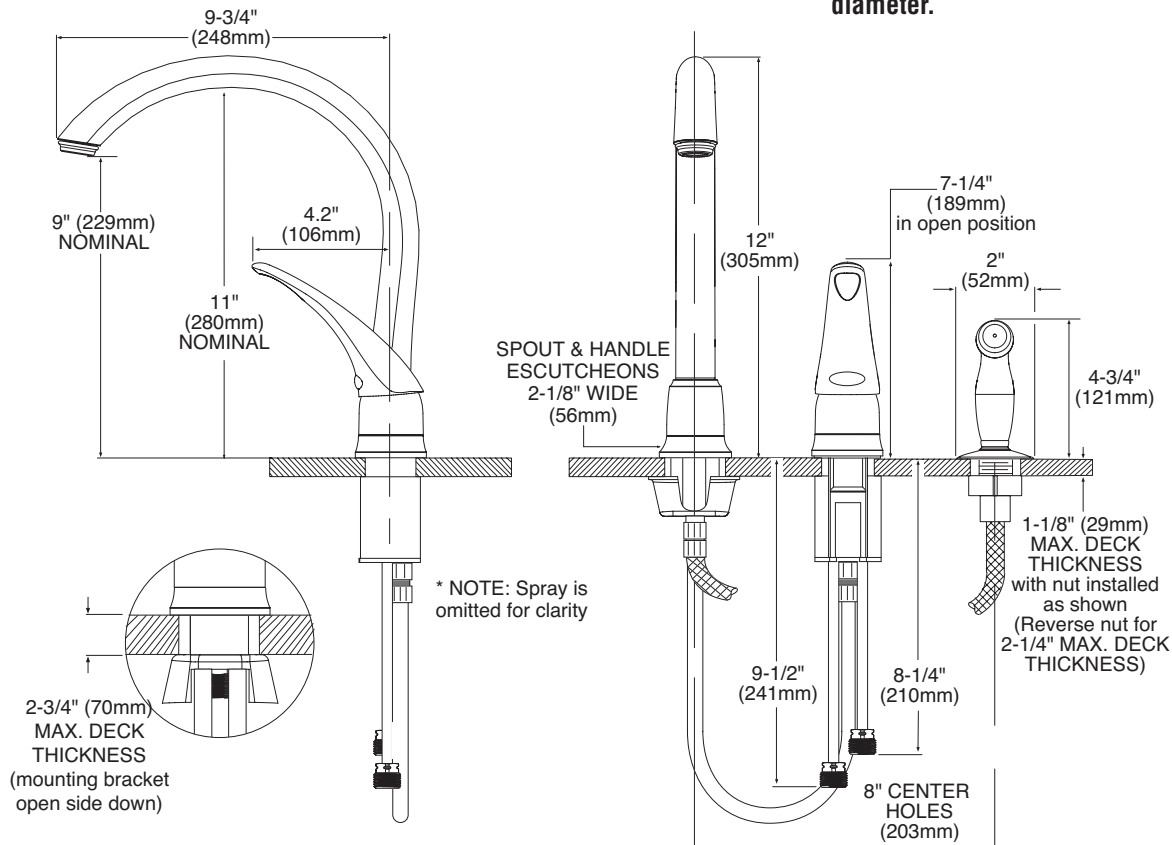

CRITICAL DIMENSIONS

(DO NOT SCALE)