

FAUCET DESCRIPTION

- Metal construction with chrome plated, platinum or chrome/LifeShine® polished brass. LifeShine® polished brass, stainless, copper, classic gold, Black Opal™, or Satine™ finishes
- 1/2" IPS connections
- Lever style handles (less handle inserts)
- Handle inserts include hot (red) and cold (blue) color indicators

OPERATION

- Hot side counterclockwise to open (clockwise to close)
- Cold side clockwise to open (counterclockwise to close)

FLOW

- Aerator is limited to 2.2 gpm (8.3 L/min).

CARTRIDGE


- 1224 cartridge design
- Nonmetallic, nonferrous and stainless steel material

STANDARDS

- Designed and manufactured to comply with the requirements of: CSA B-125, ASME A112.18.1M, and all applicable requirements referenced therein and complies with the applicable requirements of ANSI A117.1.
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Water Drinking Act

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

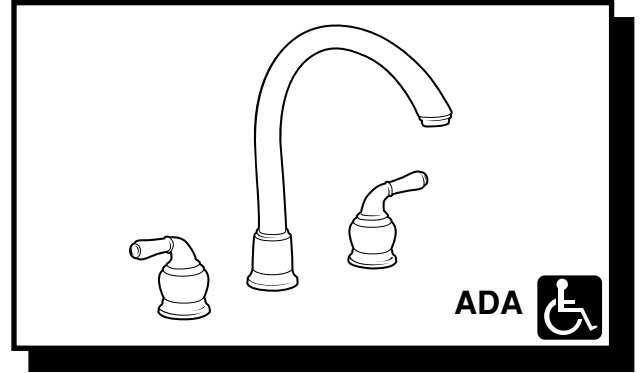

Monticello® with Cathedral™ Spout
Two Handle Kitchen Faucet
 (less handle inserts on 7000 series,
 handle inserts included on 80000 series)

**Models: 7785, 7785CP, 7785P, 7785SL,
 R7785CG/A7785CG, R7785CPR/A7785CPR,
 R7785PM/A7785PM, R7785BP/A7785BP,
 R7785ST/A7785ST
 87785, 87785SL**

**NOTE: See reverse side
 for illustrated parts**

**Spout installs through deck holes a minimum of 1-1/4"
 (32mm) in diameter.
 Valves install through 1-1/8" (28mm)
 min. diameter hole.**

