

Timbers Path



Timbers Path is Mohawk Group’s light commercial resilient tile, designed to bring the look of natural hardwood to light commercial and contract residential spaces. The color line ranges from traditional woods to contemporary grey tones and rustic visuals. Textures relate to the species featured and contribute to a realistic wood. The 12 mil wear layer is protected by our exclusive M-Force™ Enhanced Urethane, offering maximum wear resistance.

Style Name	Timbers Path
Style Number	EQ140
Brand	Mohawk Group - Hard Surface
Product Type	Light Commercial Resilient Tile



DESIGN

Overall Gauge	.10" (2.5mm)
Wear Layer	12 mil (0.3mm)
Finish	M-Force™ Enhanced Urethane
Texture	Wood Emboss
Colors Available	12
Size	6" x 48" (152.4mm x 1219.2mm)
Packaging	36 sf/ctn (3.34 m ² /ctn); 18 pcs/ctn; 34.17 lbs/ctn (15.49 kg/ctn)
Installation	Glue Down
Recommended Adhesive	M95.0 Resilient Flooring Adhesive, MS160 Spray, M700 Pressure Sensitive Adhesive
Optional Underlayment	Mohawk AccuSound™



PERFORMANCE

Construction	Light Commercial Grade Resilient Tile
Classification	ASTM F1700 - Class III, Type A - Smooth, Type B - Embossed
Squareness	ASTM F2055 - Passes - ±0.010 in. max
Size and Tolerance	ASTM F2055 - Passes - ±0.024 in. per linear foot
Thickness	ASTM F386 - Passes - ±0.005 in.
Flexibility	ASTM F137 - Passes - ≤ 1.0 in., no cracks or breaks
Dimensional Stability	ASTM F2199 - Passes - 6hrs@180F, 0.12%
Static Load Limit	ASTM F970 - Passes, modified - 1500 psi
Residual Indentation	ASTM F1914 - Passes - Average less than 8%
Slip Resistance	ASTM D2047 - Passes - > 0.6 Wet, 0.6 Dry
Resistance to Chemicals	ASTM F925 - Passes - No Change or Slight Change
Resistance to Light	ASTM F1515 - Passes - ΔE ≤ 8
Resistance to Heat	ASTM F1514 - Passes - ΔE ≤ 8
Critical Radiant Flux	ASTM E648 - Passes - ≥ 0.45 watts/cm ² , Class 1
Smoke Density	ASTM E662 - Passes



SUSTAINABILITY

Certification	FloorScore® Certified
---------------	-----------------------



SERVICE

Warranty	Limited 10 Year Light Commercial
----------	----------------------------------

Recommended Applications


- Contract residential and commercial with light foot traffic
- Assisted Living – throughout
- Dormitories/Housing
- Local retail stores
- Guest rooms

Selling Features

- 12 mil wear layer protected with M-Force™ Enhanced Urethane
- No-polish maintenance reduces occupied costs
- Diverse color line spanning from traditional to contemporary
- 6" x 48" format installs quickly and gives a longer, more linear look
- FloorScore® Certified

Timbers Path

Construction Timbers Path tiles feature a 12 mil commercial wear layer and are coated with M-Force™ Enhanced Urethane, which is polish-optional for versatile, cost-effective maintenance. The commercial backing layer supports the plank for dimensional stability.

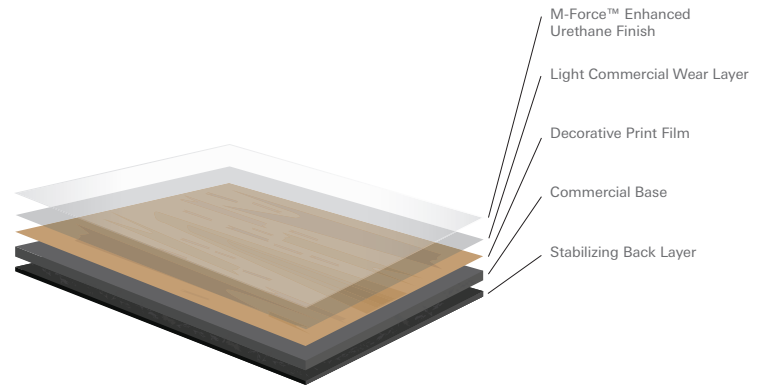

Colorways available in 6" x 48" planks



Install Methods

