

Contact:

Job Name:

Ordering Code:



# BINA PENDANT ROUND

## DESCRIPTION

- Slim aluminum luminaire
- Black, white or matte chrome
- Black, white, or matte chrome decorative bezel
- Ultra thin 1.5" profile

## ELECTRICAL


- 40, 60, 78 Watt Systems
- 120V only
- 0-10V Dimming to 10%

## LED PERFORMANCE

- LED: Luminus MP Series
- SDCM: 3 MacAdam Ellipse
- CCT: 2700K, 3000K or 3500K
- CRI: >80
- LIFE: >50,000 hrs

## LISTINGS

- IP20 rating
- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0

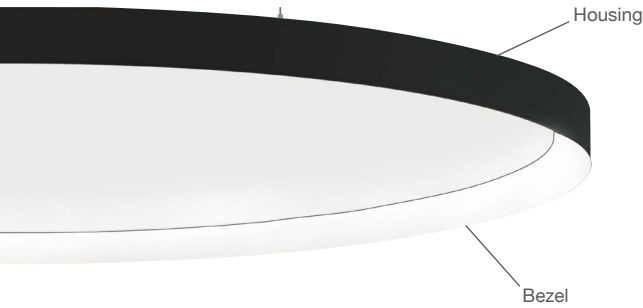


INDIRECT	2700K	3000K	3500K
24"	1360 lm	1415 lm	1415 lm
32"/40"	3100 lm	3220 lm	3220 lm

DIRECT	2700K	3000K	3500K
24"	3760 lm	3900 lm	3900 lm
32"	6280 lm	6630 lm	6630 lm
40"	8300 lm	8600 lm	8600 lm


## ORDERING CODES

Follow the steps to specify your fixture, example: BINA - P - RD - 27K - 32 - D - WH - BK - BK

Part Number	Type	CCT	Size	Light Output	Housing	Bezel Color	Canopy Color
BINA-P bina pendant	RD round	27K 2700K	24 D 24"	D direct only	BK black	BK black	BK black
		30K 3000K	32 D 32"	DI direct/indirect	MC matte chrome	MC matte chrome	MC matte chrome
		35K 3500K	40 D 40"		WH white	WH white	WH white

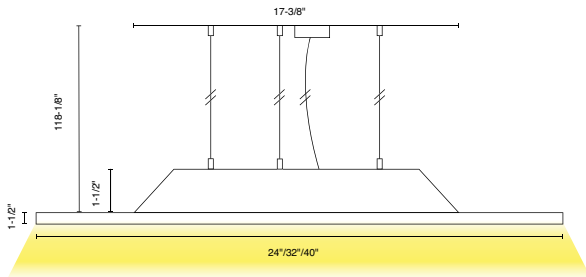

Direct

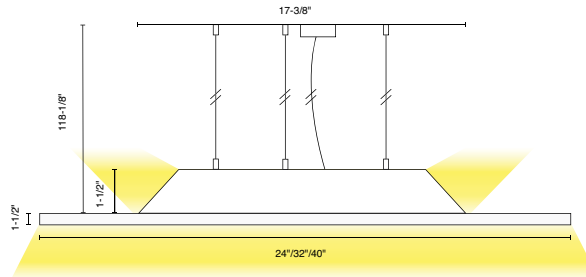

Direct/Indirect