

Contact:

Job Name:

Ordering Code:



BINA PENDANT SQUARE

DESCRIPTION

- Slim aluminum luminaire
- Black, white or matte chrome
- Black, white, or matte chrome decorative bezel
- Ultra thin 1.5" profile

ELECTRICAL

- 40, 60, 78 Watt Systems
- 120V only
- 0-10V Dimming to 10%

LED PERFORMANCE


LED: Luminus MP Series
SDCM: 3 MacAdam Ellipse
CCT: 2700K, 3000K or 3500K
CRI: >80
LIFE: >50,000 hrs

LISTINGS

- IP20 rating
- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0

INDIRECT	2700K	3000K	3500K
24"	1510 lm	1630 lm	1630 lm
32"/40"	3020 lm	3250 lm	3250 lm


DIRECT	2700K	3000K	3500K
24"	3950 lm	4260 lm	4260 lm
32"	5650 lm	6090 lm	6090 lm
40"	7250 lm	7850 lm	7850 lm

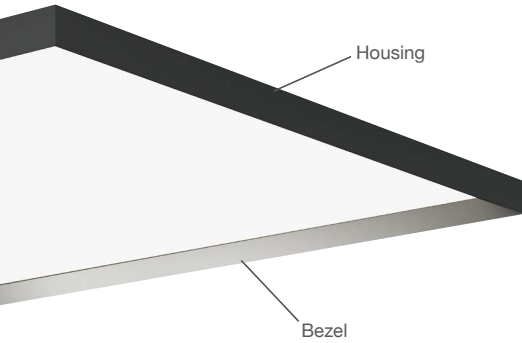


ORDERING CODES

Follow the steps to specify your fixture, example: BINA - P - SQ - 27K - 32 - D - WH - BK - MC

Part Number	Type	CCT	Size	Light Output	Housing	Bezel Color	Canopy Color
BINA-P bina pendant	SQ square	27K 2700K	24 24" x 24"	D direct only	BK black	BK black	BK black
		30K 3000K	32 32" x 32"	DI direct/indirect	MC matte chrome	MC matte chrome	MC matte chrome
		35K 3500K	40 40" x 40"		WH white	WH white	WH white

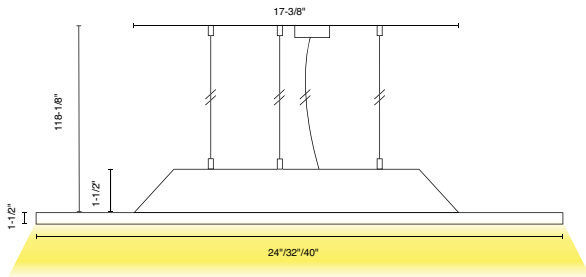

Direct

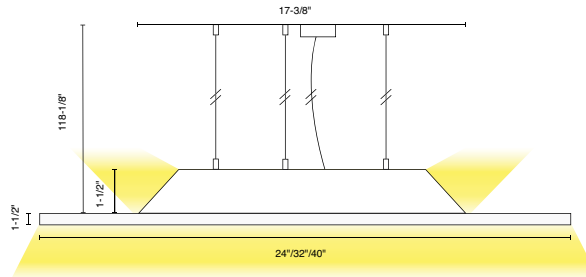

Direct/Indirect