


Contact:

Job Name:

Ordering Code:

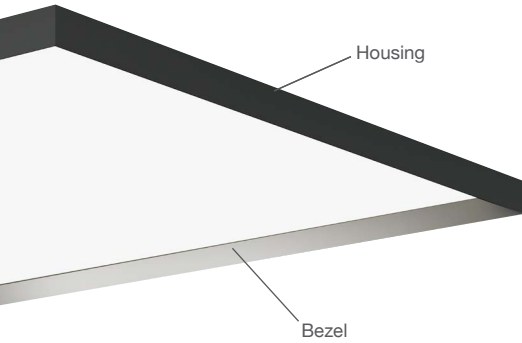

BINA PENDANT SQUARE

DESCRIPTION

- Slim aluminum luminaire
- Black, white or matte chrome
- Black, white, or matte chrome decorative bezel
- Ultra thin 1.5" profile

ELECTRICAL/CONTROLS

- 30, 40, 60, 78 Watt Direct Systems
- 45, 55, 86, 104 Watt Direct/Indirect Systems
- 120-277V driver, 50/60Hz input
- 0-10V Dimming to 1%

LED INFO

LED: Luminus MP Series
 SDCM: 3-step MacAdam Ellipse
 CCT: 2700K, 3000K or 3500K
 CRI: >80
 Lumen Maintenance: $L_{70} > 50,000$ hrs

LISTINGS

- IP20 rating
- ETLus Listed to UL1598 (suitable for indoor use and dry locations only)
- cETL Listed to CSA C22.2 #250.0


INDIRECT	2700K	3000K	3500K
16"/24"	1360 lm	1415 lm	1415 lm
32"/40"	3100 lm	3220 lm	3220 lm

DIRECT	2700K	3000K	3500K
16"	2680 lm	2775 lm	2775 lm
24"	3745 lm	3875 lm	3875 lm
32"	6410 lm	6635 lm	6635 lm
40"	8530 lm	8835 lm	8835 lm


ORDERING CODES

Follow the steps to specify your fixture, example: **BINA - P - SQ - 27K - 32 - D - WH - BK - MC**

Part Number	Type	CCT	Size	Light Output	Housing	Bezel Color	Canopy Color
BINA-P bina pendant	SQ square	27K 2700K	16 16" x 16"	D direct only DI direct/indirect	BK black MC matte chrome WH white	BK black MC matte chrome WH white	BK black MC matte chrome WH white
		30K 3000K	24 24" x 24"				
		35K 3500K	32 32" x 32"				
			40 40" x 40"				

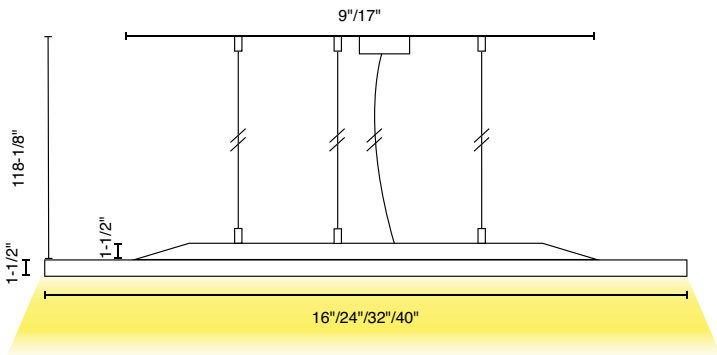

Direct

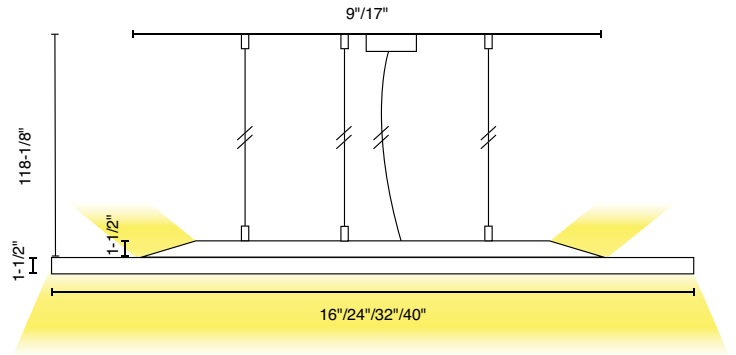

Direct/Indirect