

NEWPORT BRASS

KIMBELL

Features

- Solid brass construction
- 7.06" (17.9 cm) spout length
- 1/2" NPT spout inlet fitting
- Rough valve incorporates a brass valve body assembly
- Rough valve incorporates quarter-turn washerless ceramic disc valve cartridges
- Intended for use with Newport Brass rough valve
 - as specified (Required Accessory)
- ADA Compliant

WALL-MOUNTED TUB TRIM


3-3425



Codes / Standards Compliance

Meets or exceeds the following at date of manufacture:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC
- IPC
- ADA & ICC/ANSI A117.1
- All applicable US Federal and State material regulations

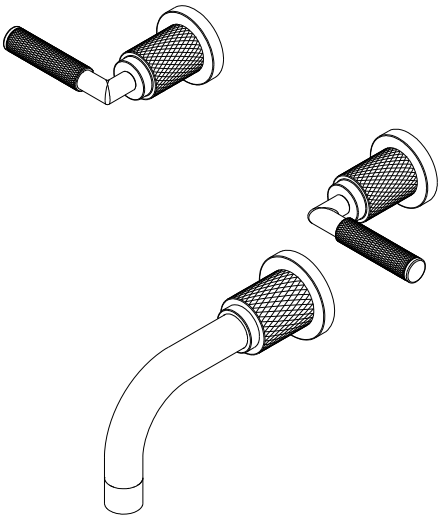


ACCESSORY REQUIRED	
System Element	Wall Tub Rough Valve
Description	2-Cartridge Assembly
Inlet/Outlet Size	1/2" / 1/2"
Part Number	1-500U
Image	A technical line drawing of the 2-cartridge assembly. It shows a central valve body with two separate cartridge assemblies attached to it. Each cartridge has a handle and a stem with a disc at the end, designed to be inserted into the valve body to control water flow.

NEWPORT BRASS

PRODUCT DIMENSIONS *(Units are in inches)*

Product Dimensions are provided for reference only. For specific product installation guidelines, please reference the Installation Instructions of the product being installed.

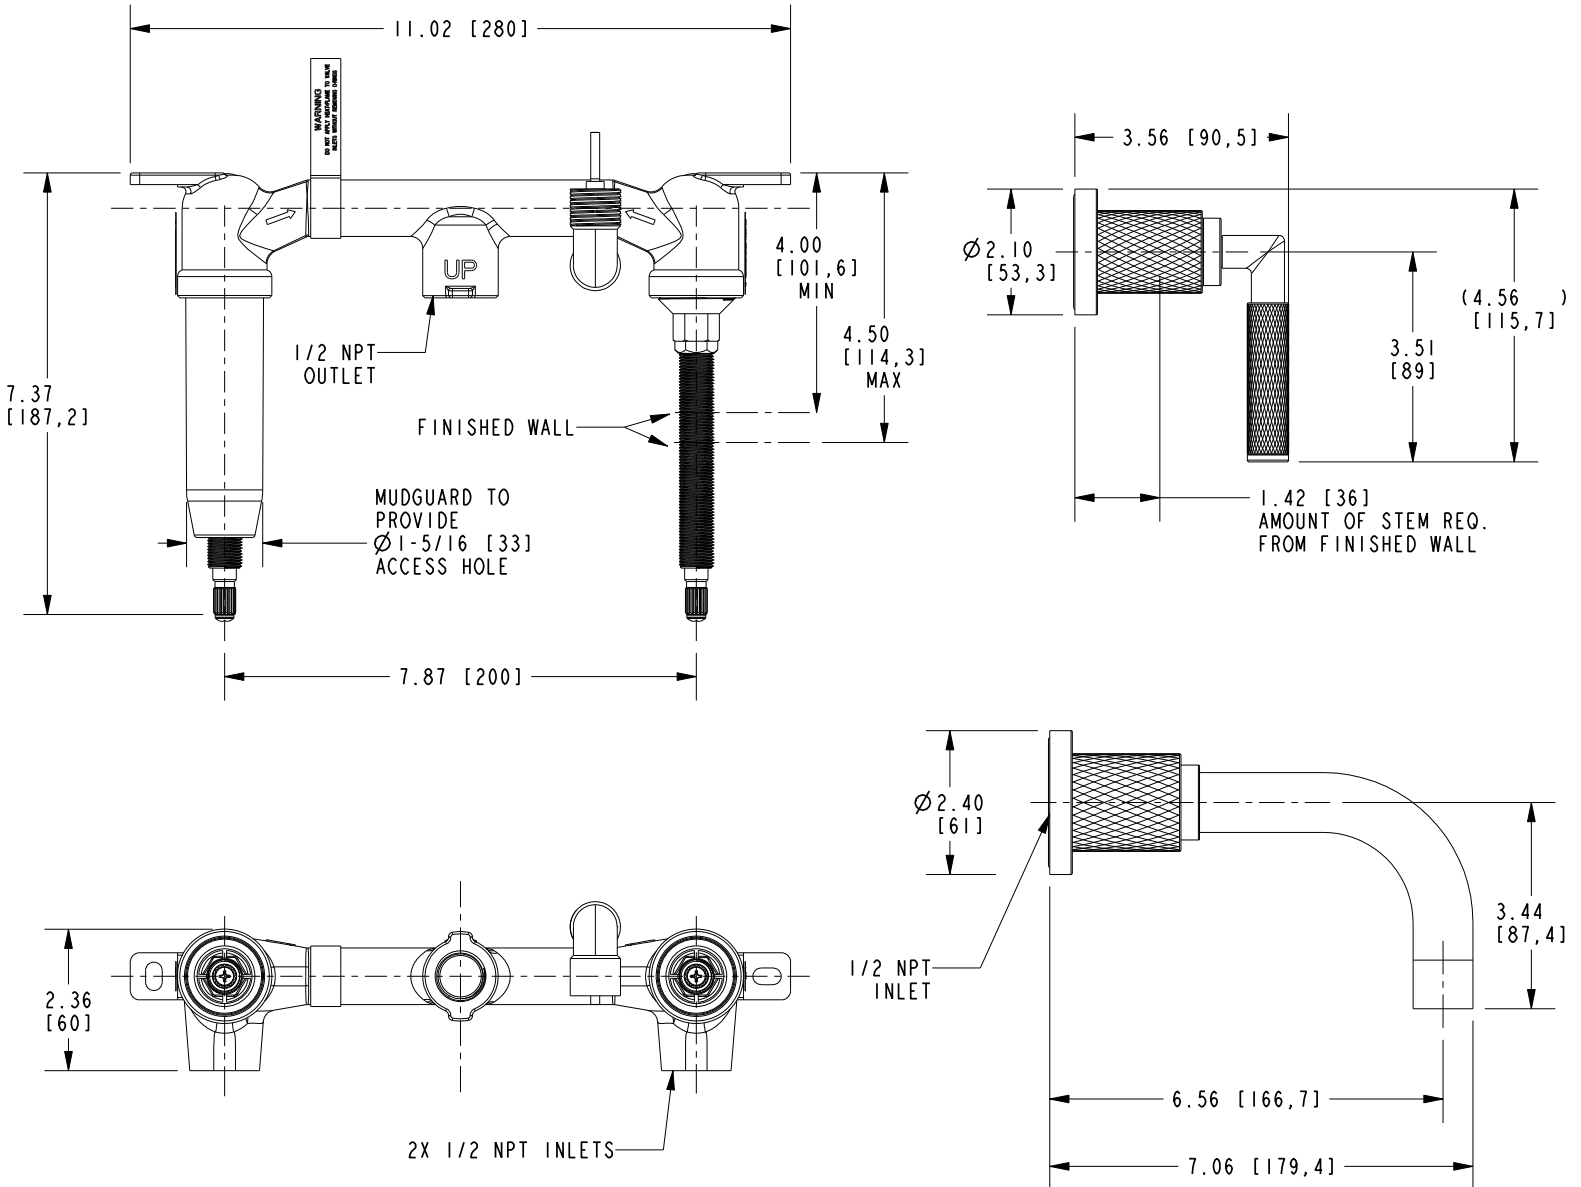

WALL-MOUNTED TUB TRIM

3-3425