


# NS-40 / NL-41 Stepped Baffle with Ring

## TRIM DIMENSIONS



Trim OD: 5"  
Aperture: 3-1/2"  
Height: 1-7/8"

## FEATURES

### Trim

Precision spun 0.040 baffle with deep grooves to reduce aperture glare. Non-reflective painted finishes. Separate trim ring available in plastic or metal, may also be used with custom combination of ring finishes.

### Mounting

Trim includes three trim clips that securely mount trim in housing.

### Compatible Housings

Compatible with Line Voltage and Compact Fluorescent housings. See individual specification sheets for more information.

### Lamp

#### Line Voltage

50W R20/PAR20 Max. (NS-401QAT; NSIC-401QAT; NSR-404QAT)

#### Compact Fluorescent

13W Quad/Triple (NS-406Q; NS-406EL; NSR-408Q; NSR-408EL)

### Labels and Listings

cULus Listed for Damp Location when used with compatible housing.

## Stepped Baffle with Ring

- NS-40: White Stepped Baffle with White Metal Ring
- NS-40BZBZ: Bronze Stepped Baffle with Bronze Metal Ring
- NS-40C: White Stepped Baffle with Chrome Metal Ring
- NS-40CO: Copper Stepped Baffle with Copper Metal Ring
- NS-40G: White Stepped Baffle with Gold Metal Ring
- NS-40N: Natural Metal Stepped Baffle with Natural Metal Ring
- NS-40P: White Phenolic Stepped Baffle with White Plastic Ring
- NS-41: Black Stepped Baffle with White Metal Ring
- NS-41B: Black Stepped Baffle with Black Metal Ring
- NS-41C: Black Stepped Baffle with Chrome Metal Ring
- NS-41G: Black Stepped Baffle with Gold Metal Ring
- NS-41N: Black Stepped Baffle with Natural Metal Ring
- NS-41P: Black Phenolic Stepped Baffle with White Plastic Ring

Type


Project

Catalog No.


Lamp/Wattage

## HOUSING DIMENSIONS


### NS-401QAT

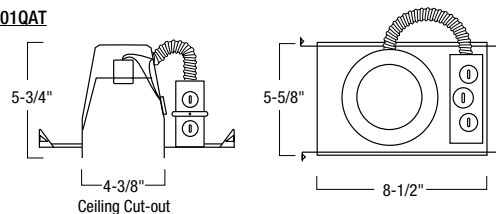


### NSIC-401QAT

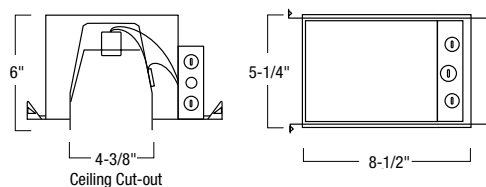


### NSR-404QAT

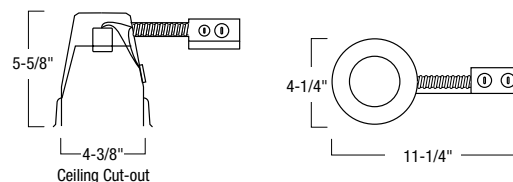

### NS-406Q / NS-406EL

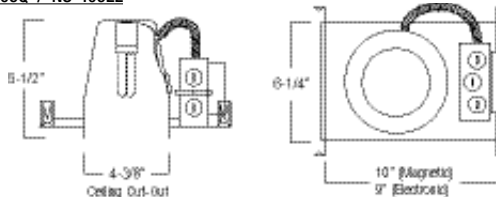

### NSR-408Q / NSR-408EL

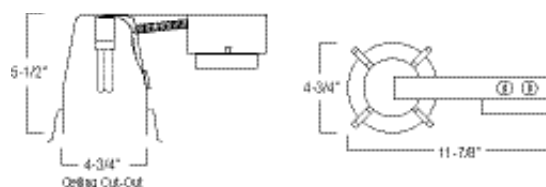

## Compatible Housings

### LINE VOLTAGE

Item Number	Installation Type	Lamp	Dimensions
NS-401QAT	Non-IC Air-Tight New Const.	50W R/PAR20	W: 5-5/8" L: 8-1/2" H: 5-5/8"
NSIC-401QAT	IC Air-Tight New Construction	50W R/PAR20	W: 5-1/4" L: 8-1/2" H: 6-3/8"
NSR-404QAT	Non-IC Air-Tight Remodel	50W R/PAR20	W: 4-1/4" L: 11-1/4" H: 5-5/8"

### COMPACT FLUORESCENT

NS-406Q	Non-IC New Constr., Magnetic	13W Quad	W: 6-1/4" L: 10" H: 5-1/2"
NS-406EL	Non-IC New Constr., Electronic	13W Quad/Triple	W: 6-1/4" L: 9" H: 5-1/2"
NSR-408Q	Non-IC Remodel, Magnetic	13W Quad	W: 4-3/4" L: 11-7/8" H: 5-1/2"
NSR-408EL	Non-IC Remodel, Electronic	13W Quad/Triple	W: 4-3/4" L: 11-7/8" H: 5-1/2"