

NM2-2RDCS

2" M2 Round LED Recessed Lensed Downlight

Source: 6W, 8W or 10W LED
400lm, 600lm or 850lm

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION

M2 downlight series features quality and convenience with easy installation for insulated or non-insulated applications.

FEATURES

- No housing required - IC Air-Tight rated
- Easy installation for remodel or new construction applications
- Quick disconnect allows for extended lengths
- 400lm, 600lm or 850lm LED packages
- 2700K or 3000K @ 90+ CRI
- Triac or ELV dimming
- 5-year limited warranty
- cETLus Listed for Wet Locations

SPECIFICATION

Construction: Die-cast aluminum trims available in matte black or matte powder white finish. Frosted lens included with matching reflector finish as trim.

Air Flow Restriction: Luminaire has factory installed gasket to restrict airflow from room into ceiling plenum to <2CFM (cubic feet per minute) in accordance with ASTM-283 Air-Tight requirements.

Clearance: IC rated luminaires are rated for direct contact with insulation (not spray foam insulation), no minimum clearance is required.

Junction Box: Prewired junction box includes quick connect to LED fixtures for ease of installation. Junction box includes two (400lm/600lm) or four (850lm) 1/2" trade size knockouts and snap on cover with 7" quick connect wire. Luminaire includes 5" (400lm/600lm) or 4" (850lm) quick connect wire.

Mounting: No housing is required, two tensions steel spring clips secure luminaire to ceiling. Accommodates ceiling thickness up to 3/4". New construction frame-in kit is available, see accessories.

ELECTRICAL

Input Voltage: 120V

Delivered Lumens / Wattage: **40** = 450lm / 6W; **60** = 500lm / 8W; **85** = 725lm / 10W

Color Temperature: 2700K or 3000K

CRI: 90+CRI

Beam Spread: 44° Flood

Operating Temperature: **40 & 60** = 0°C to 40°C ambient temperature; **85** = 0°C to 25°C ambient temperature

Lifetime: 60,000 hours @ L70

Dimming: Dimmable down to 10% with Triac or ELV

[Click Here](#) or check complete dimmer list at www.NoraLighting.com in the "Compatibility" page under "Resources" tab

OPTIONAL MOUNTING ACCESSORIES

NM2-MLS1: One Head Multiple Lighting System Plate

NM2-MLS2: Two Head Multiple Lighting System Plate

NM2-MLS3: Three Head Multiple Lighting System Plate

NM2-2R-F: New Construction Frame-In Plate

NM2-EW-4: 4' Quick Connect Linkable Extension Cable

NM2-EW-10: 10' Quick Connect Linkable Extension Cable

LABELS AND LISTINGS

- cETLus Listed for Wet Locations
- [5-Year Limited Warranty](#)
- FCC compliant
- Certified to the high efficacy requirements of California Title 24 JA8-2019




PRODUCT IMAGES AND DIMENSIONS



NM2-2RDCSXXXXBB
400lm or 600lm
Matte Black

NM2-2RDCS85XXMPW
850lm
Matte Powder White

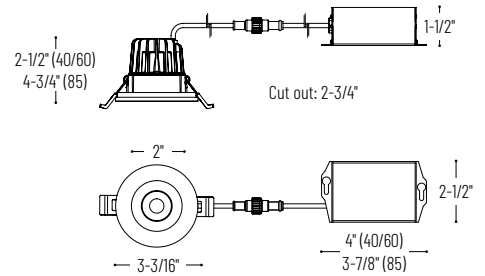

2" M2 Round LED Recessed Lensed Downlight

Trim Type	Lumens / Wattage	Color Temperature / CRI	Finish
NM2-2RDCS = 2" Round Lensed Downlight	40 = 400lm / 6W	27 = 2700K / 90 CRI	BB = Matte Black
	60 = 600lm / 8W	30 = 3000K / 90 CRI	MPW = Matte Powder White
	85 = 850lm / 10W		

Optional Mounting Accessories

Accessory Type	Finish
NM2-MLS1 = One Head MLS Plate	BB = Matte Black
NM2-MLS2 = Two Head MLS Plate	MPW = Matte Powder White
NM2-MLS3 = Three Head MLS Plate	
NM2-2R-F = New Construction Frame-In Plate	
NM2-EW-4 = 4' Quick Connect Extension Cable	
NM2-EW-10 = 10' Quick Connect Extension Cable	

Example: **NM2-2RDCS6030MPW** = 2" M2 Round LED Recessed Lensed Downlight, 600lm / 8W, 3000K / 90 CRI, Matte Powder White

NM2-2RDCS

2" M2 Round LED Recessed Lensed Downlight Accessories

Type	_____
Project	_____
Catalog No.	_____
Notes	_____




Multiple Lighting System Plates

- NM2-MLS1B** 1 Head / Matte Black
 - NM2-MLS1MPW** 1 Head / Matte Powder White
 - NM2-MLS2B** 2 Head / Matte Black
 - NM2-MLS2MPW** 2 Head / Matte Powder White
 - NM2-MLS3B** 3 Head / Matte Black
 - NM2-MLS3MPW** 3 Head / Matte Powder White
- Converts multiple round LED luminaires into multiple lighting system without a large housing.



New Construction Frame-In Plate

NM2-2R-F
For new construction pre-wiring and easier layout planning.



Quick Connect Extension Linkable Cables

NM2-EW-4 4' Cable
NM2-EW-10 10' Cable

Use to extend the length between luminaire and driver enclosure. Can be connected together to create custom lengths. Maximum length between luminaire and driver is 40'.

PHOTOMETRICS

2" M2 Round LED Recessed Lensed Downlight

Type


Project

Catalog No.

Notes

Test Information

Test Number: NTR1506
 Part Number: NM2-2RDSCS4030MPW
 Beam Spread: 44° Flood
 Lumens: 450lm
 Wattage: 7.08W
 Efficacy: 63lpw
 CCT / CRI: 3000K / 90 CRI
 Spacing Criteria (0°-180): 0.7
 Spacing Criteria (90°-270): 0.7



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
2'	154fc	1'-7"
4'	38.6fc	3'-2"
6'	17.2fc	4'-10"
8'	9.7fc	6'-5"
10'	6.2fc	8'

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	293	65.1
0-40	366	81.3
0-60	427	95
0-90	449	99.9
90-180	0	0.1
0-180	450	100

Candela Table

Vertical Angles	Candela
0	618
5	596
15	446
25	249
35	114
45	50

Test Information

Test Number: NTR1505
 Part Number: NM2-2RDSCS6030MPW
 Beam Spread: 44° Flood
 Lumens: 505lm
 Wattage: 8.1W
 Efficacy: 62lpw
 CCT / CRI: 3000K / 90 CRI
 Spacing Criteria (0°-180): 0.7
 Spacing Criteria (90°-270): 0.7



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
2'	172fc	1'-7"
4'	43.1fc	3'-2"
6'	19.1fc	4'-10"
8'	10.8fc	6'-5"
10'	6.9fc	8'

Zonal Lumen Summary


Zone	Lumens	% Luminaire
0-30	328	65
0-40	410	81.2
0-60	479	95
0-90	504	99.9
90-180	0	0.1
0-180	505	100

Candela Table

Vertical Angles	Candela
0	689
5	666
15	501
25	280
35	129
45	57

Test Information

Test Number: NTR1504
 Part Number: NM2-2RDSCS8530MPW
 Beam Spread: 44° Flood
 Lumens: 725lm
 Wattage: 10W
 Efficacy: 72lpw
 CCT / CRI: 3000K / 90 CRI
 Spacing Criteria (0°-180): 0.7
 Spacing Criteria (90°-270): 0.7



Illuminance at a Distance

Distance from Luminaire	FC at Nadir	Beam Diameter
2'	244fc	1'-7"
4'	60.9fc	3'-2"
6'	27.1fc	4'-10"
8'	15.2fc	6'-5"
10'	9.7fc	8'-1"

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	466	64.3
0-40	583	80.5
0-60	686	94.7
0-90	724	99.9
90-180	1	0.1
0-180	725	100

Candela Table

Vertical Angles	Candela
0	974
5	945
15	710
25	396
35	184
45	84