

NELOCAC

ELO and ELO+ LED Surface Mount Luminaire

Source: 12W to 24W LED
700lm to 1700lm

Type

Project

Catalog No.

Notes

PRODUCT DESCRIPTION

ELO family of LED luminaires are a thin 1/2" surface mounted luminaire with dedicated color temperature. Luminaire is available in 6", 8" or 11" sizes and mounts easily over a standard or fire rated junction boxes. The ELO family has two options: The standard ELO fixture, which is 80 CRI and only available in a white finish, and the upgraded ELO+ fixture, which meets CA JA8-2019 at 90 CRI and has interchangeable trims to achieve different finishes.

FEATURES

- Dedicated color temperatures at 80 CRI (ELO) or 90 CRI (ELO+)
- Surface mounted or retrofit into existing recessed housings with torsion spring kit (ordered separately)
- Available in three sizes (6", 8" or 11")
- Dimmable with Triac or ELV dimmers
- ELO+ Series includes an integral magnet allows optional finish ring to attach seamlessly*
- 5-year limited warranty

SPECIFICATION

Construction: Surface mounted luminaire includes integral driver. ELO+ luminaires include an integral magnet for decorative rings in black, brushed nickel, chrome or matte powder white finish (ordered separately).

Mounting: Steel bracket can be used to surface mount on junction box. Optional torsion springs are available for retrofitting 5" or 6" recessed housings.

ELECTRICAL

Input Voltage: 120V

Lumens / Wattage: 6" = 700lm / 12W; 8" = 1100lm / 18W; 11" = 1700lm / 24W

Color Temperature: 2700K, 3000K, 3500K, 4000K or 5000K

CRI: 80 or 90

Operating Temperature: 0-45°C

Dimming: Triac or ELV

[Click Here](#) or check complete dimmer list at www.NoraLighting.com in the "Compatibility" page under "Resources" tab

ACCESSORIES

Decorative Rings: ELO+ Series includes an integral magnet to mount optional decorative rings seamlessly. Finishes include black, brushed nickel, chrome or matte powder white in 6", 8" or 11" sizes.

* Optional decorative rings are held in place with integral magnets. Installations that might have heavy vibrations should be tested.


NLOCAC-681IRECKIT: ELO & ELO+ Series can be mounted to a 5" or 6" recessed housings with torsion spring brackets using optional torsion spring kit.

LABELS AND LISTINGS


- cETLus Listed for Damp Location
- ENERGY STAR® certified
- FCC certified
- 5-Year Limited Warranty
- Certified to the high efficacy requirements of California Title 24 JA8-2019 (ELO+ only)
- Suitable for use in closets when installed in accordance to NEC Section 410.16 (A)(1) and 410.16 (C)(1)




PRODUCT IMAGES & DIMENSIONS



NELOCAC-6
6" ELO

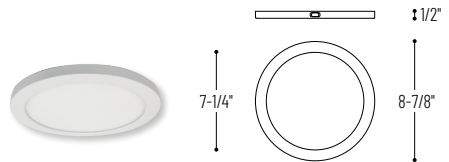

NELOCAC-8
8" ELO

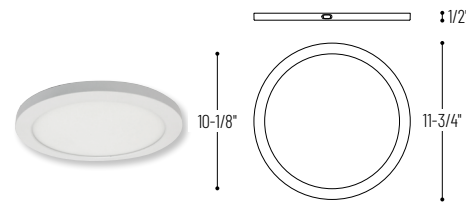

NELOCAC-11
11" ELO



NLOCAC
Decorative Rings for ELO+



NLOCAC-681IRECKIT
Retrofit Kit for 5" or 6" Recessed Housings

ELO and ELO+ LED Surface Mount Luminaire

	Luminaire Size	Color Temperature / CRI	Finish
ELO+	NELOCAC-6RP = 6" ELO+	927 = 2700K / 90 CRI	W = White
	NELOCAC-8RP = 8" ELO+	930 = 3000K / 90 CRI	
	NELOCAC-11RP = 11" ELO+	935 = 3500K / 90 CRI	
		940 = 4000K / 90 CRI	
ELO	NELOCAC-6R = 6" ELO	30 = 3000K / 80 CRI	W = White
		NELOCAC-8R = 8" ELO	
		NELOCAC-11R = 11" ELO	

Optional Accessories

Description	Decorative Ring Finish
NLOCAC-6R = 6" Ring for ELO+ only	B = Black
NLOCAC-8R = 8" Ring for ELO+ only	BN = Brushed Nickel
NLOCAC-11R = 11" Ring for ELO+ only	CH = Chrome
	MPW = Matte Powder White
NLOCAC-681IRECKIT = Torsion Spring Kit	

Example: **NELOCAC-8RP930W** = 8" ELO+ LED Surface Mount Luminaire, 3000K / 90 CRI, White finish