

DESCRIPTION

- Energy-saving 42 watt fluorescent lamp. Purchase lamp locally. NEMA type CFTR42W/GX24q.
- Electronic ballast.
- White polymeric grille blends with any decor.
- Powerful Deluxe Fan-Light Combination unit quietly removes stale, steamy air from bathrooms up to 95 sq. ft., other rooms up to 125 sq. ft.
- Grille extends only 1½" from finished ceiling.
- Polypropylene blower wheel performs efficiently with a minimum of sound.
- Tapered duct adapter with built-in damper for easy installation to 4" round duct.
- May be wired for simultaneous or separate fan and light operation.
- Refer to NuTone's catalog for a complete line of accessories to effectively adapt this unit to your construction requirements.


DESIGN FEATURES

- Air Delivery:** 100 CFM.
Sound Level: 3.5 Sones.
Dimensions: **Housing:** 9" x 9" x 6" deep.
Grille: 15" diameter.
Reflector: 9¾" diameter.
Lens: 9¾" diameter.
- Material & Finish:** **Housing:** Galvanized steel.
Grille: White polymeric.
Reflector: Steel, white powder coat finish.
Lens: Acrylic.
- Motor:** Plug-in, thermally protected.
Blower Wheel: Centrifugal, polypropylene.
Duct Size: 4" diameter.
Electrical Rating: 120v, 60Hz, 1.6Amp
Ballast: Electronic.



Deluxe Fan-Light Combination with Fluorescent Lighting

MODEL: 8663RFT

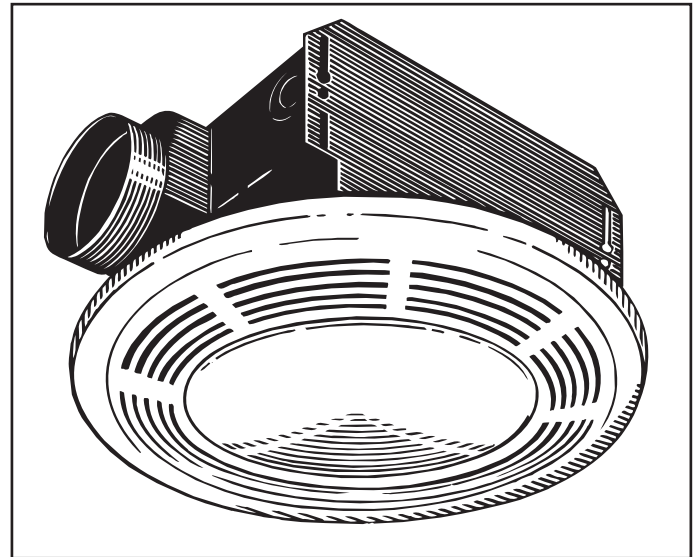

INSTALLATION

- Complete installation instructions are included with each unit.

ARCHITECT'S SPECIFICATIONS

Fan-Light Combination shall be Model Number 8663RFT as manufactured by NuTone according to listed specifications. Unit shall deliver 100 CFM at a sound level of 3.5 Sones. Housing shall measure 9" x 9" x 6" deep and connect to 4" diameter duct.

Broan-NuTone LLC Hartford, Wisconsin www.nutone.com 800-558-1711

			Location	
			Architect	
			Engineer	
			Contractor	
			Submitted by	Date

CERTIFIED TEST DATA




HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 in. static pressure, based on tests conducted in a state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements. This NuTone model is listed by Underwriters' Laboratories Inc.


The air delivery of a ventilating system may be determined by:

1. Determine the equivalent duct length for each 90 degree elbow by adding one foot of duct length for each inch of duct diameter, i.e., a 4 inch diameter duct elbow equals 4 feet equivalent duct length and an 8 inch diameter duct elbow equals 8 feet equivalent duct length.
2. Add the total straight length of duct and the equivalent length for each elbow to obtain the total equivalent duct length.
3. Locate the intersection of the fan performance curve and the total equivalent duct length curves and draw a vertical line down to the CFM scale and read the system air performance.
(NOTE: 3¼" x 10" duct equals 6 inch diameter duct.)

AIR PERFORMANCE CURVE
(4 In. Duct to 10 Foot Lengths)

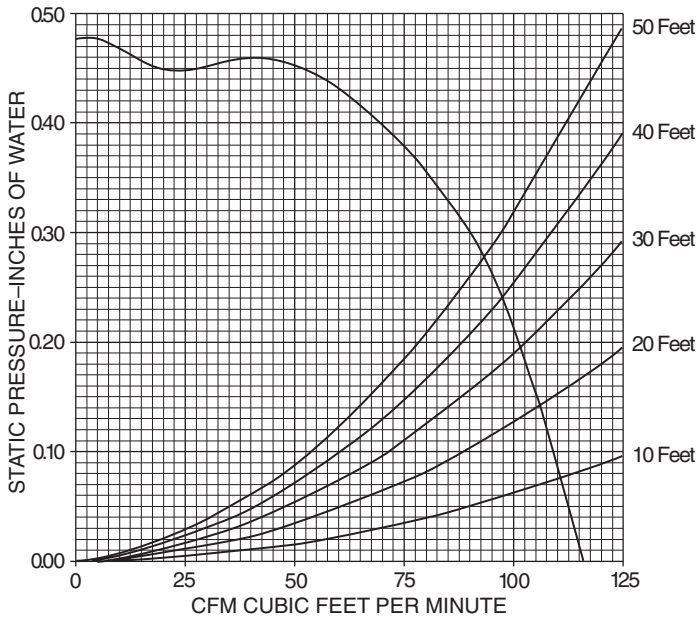

STATIC PRESSURE INCHES OF WATER	0.05	0.1	0.15	0.2	0.25	0.3	0.35	0.4	0.45
CFM	112	108	105	101	96	90	81	70	52

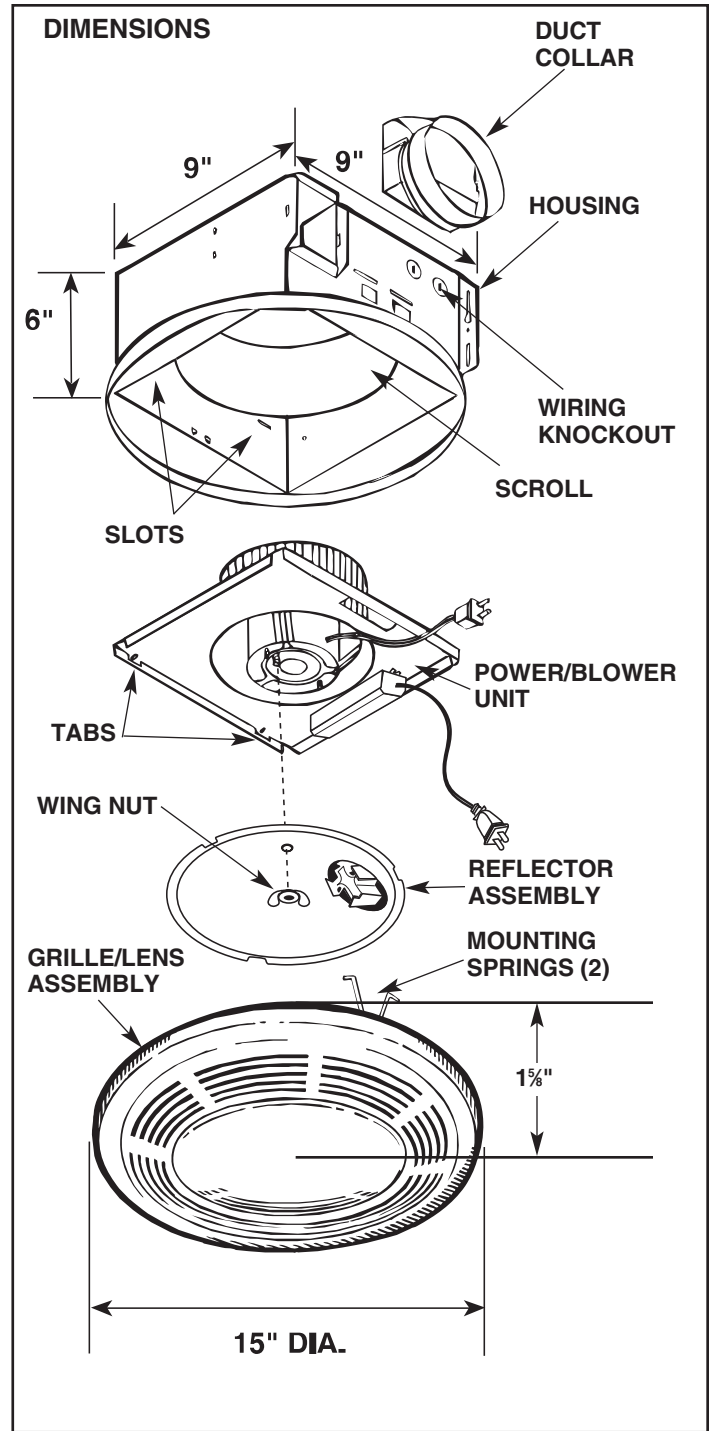

Product specifications subject to change without notice.