

LOUVER DOOR MULTI-USE CABINETS



FEATURES/TYPICAL SPECIFICATIONS


- Recess Mount Installation
 - Recommended Wall Opening Dimensions:
14" W x 18" H x 2-3/4" Minimum Depth
- Molded white plastic housing/body (PT01)
- Two molded, non-removable fixed shelves
- Painted steel door back
- Injection molded white polystyrene louvered door with wood grain texture mechanically fastened to the steel door back
- Two butt hinges riveted to the steel door back and mechanically fastened to the cabinet body
- Magnetic door latch with steel striker plate
- Cabinet is fully assembled for right-hand door swing
- Door swing of cabinet is reversible. Remove, rotate, and reattach plastic face of the door assembly.
- Includes mounting screws

Finishes:

Housing: PT01

Mirror: None

Frame: None

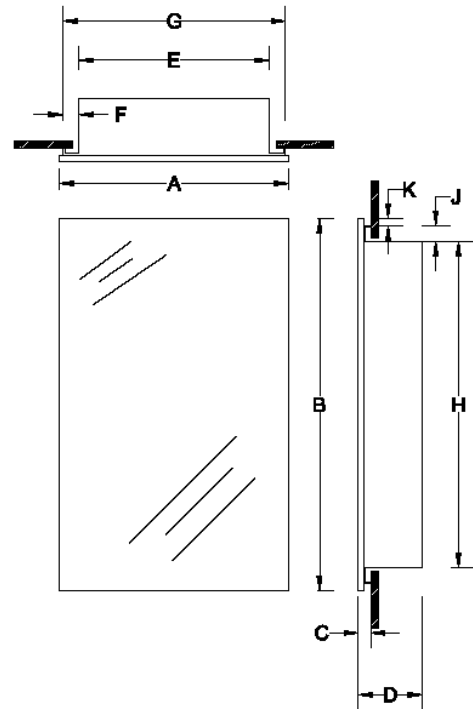

DIMENSIONS IN INCHES*

Model #	Description	A	B	C	D	E	F	G	H	J	K
615	LOUVER DOOR 1DR 16X24 PT01 PCFX	16-1/8	24-1/2	1-7/8	4-1/2	13-1/2	1	15-1/2	17-1/2	1	2-1/2

REFERENCE	QTY.	REMARKS	Project
			Location
			Architect
			Engineer
			Contractor
			Submitted by
			Date

* All models and material specifications are subject to change or withdrawal without notice.