



**OLYMPIA FAUCETS, INC.**  
3325 S. Garfield Ave.  
Commerce, CA 90040  
(888) 772-7701  
www.olympiafaucets.com

## Model Number: K-5030

### Warnings and Notes:

Check with local plumbing code requirements before installation.  
This product should be installed by a local listed plumber.  
**Do not use plumbers putty on threads.**

### Installation Steps:

#### Single Handle Pull-Out Kitchen Faucet

#### Tools:



Adjustable Wrench




Plumbers Putty




Teflon Tape




Rags

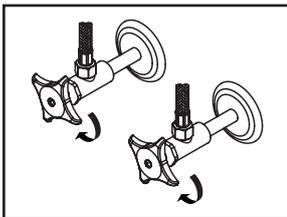


(1) Shut off water supplies. Remove old faucet. Clean mounting surface in preparation for new faucet.

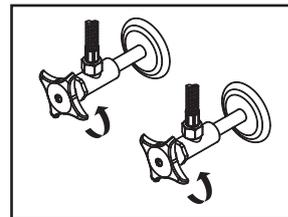


(6) Connect hot and cold inlet supply hoses to supply stops. For 1/2" connection; use 3/8" male to 1/2" female adapter for installation. Adapters are optional and not provided with faucet. Turn on both side supply stops.

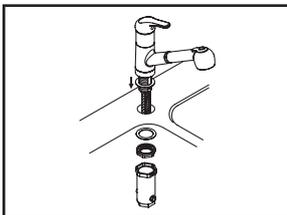


(2) **For 1-Hole Installation:-** Remove deck plate & base gasket by loosening locknut with the help of supplied mounting tool. Insert outlet hose first then two inlet hoses and spray hose through 1-hole mounting assembly then thread & tighten mounting assembly onto the faucet body, with one washer under mounting assembly insert the faucet through mounting hole. Make sure spout swivel angle are even to the right and to the left. From underneath of the sink, thread and tighten locknut with washer onto mounting assembly with the help of mounting tool.

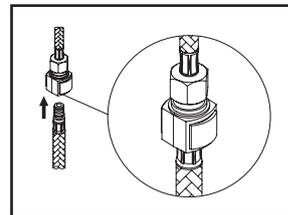

(5) Insert spray head hose into end of quick connect adapter on the outlet hose, push until a "click" is heard. Pull down to test engagement.

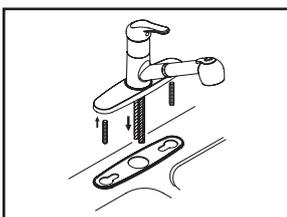

(3) **For 3-Hole Installation:-** Thread mounting bolts to deck plate. Apply plumbers putty under the base gasket. Place faucet with deck plate in position on the sink. Make sure spout swivel angle are even to the right and to the left.

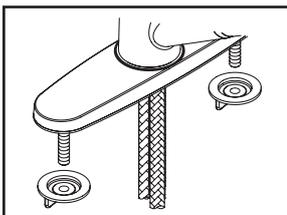


(4) Thread & tighten both mounting nuts to mounting bolts from underneath of the sink to secure deck plate.

# Exploded Drawing:

\* Note: Please specify finish/color when ordering.

	ITEM #	DESCRIPTION
A	OP-120005*	Metal Lever Handle
B	OP-420028*	Cap
C	OP-420042	Retainer Nut
D	OP-320002	Ceramic Disc Cartridge
E	OP-420063*	1.8 GPM Spray Head
F	X-4200197	Spray Hose
G	OP-420011	Spray Head Support
H	OP-420013*	Deck Plate & Base Gasket
I	OP-520003	Mounting Bolts & Nuts
J	OP-520004	Locknut
K	OP-520006*	1-Hole Mounting Assembly
L	X-4200199	Quick Connect
M	OP-520014	Mounting Tool
N	OP-420070	Weight
1	OP-490005	Hole Cover
2	OP-490029	Allen Screw
3	OP-420010	O-Ring
4	OP-420017	Spray Head Button

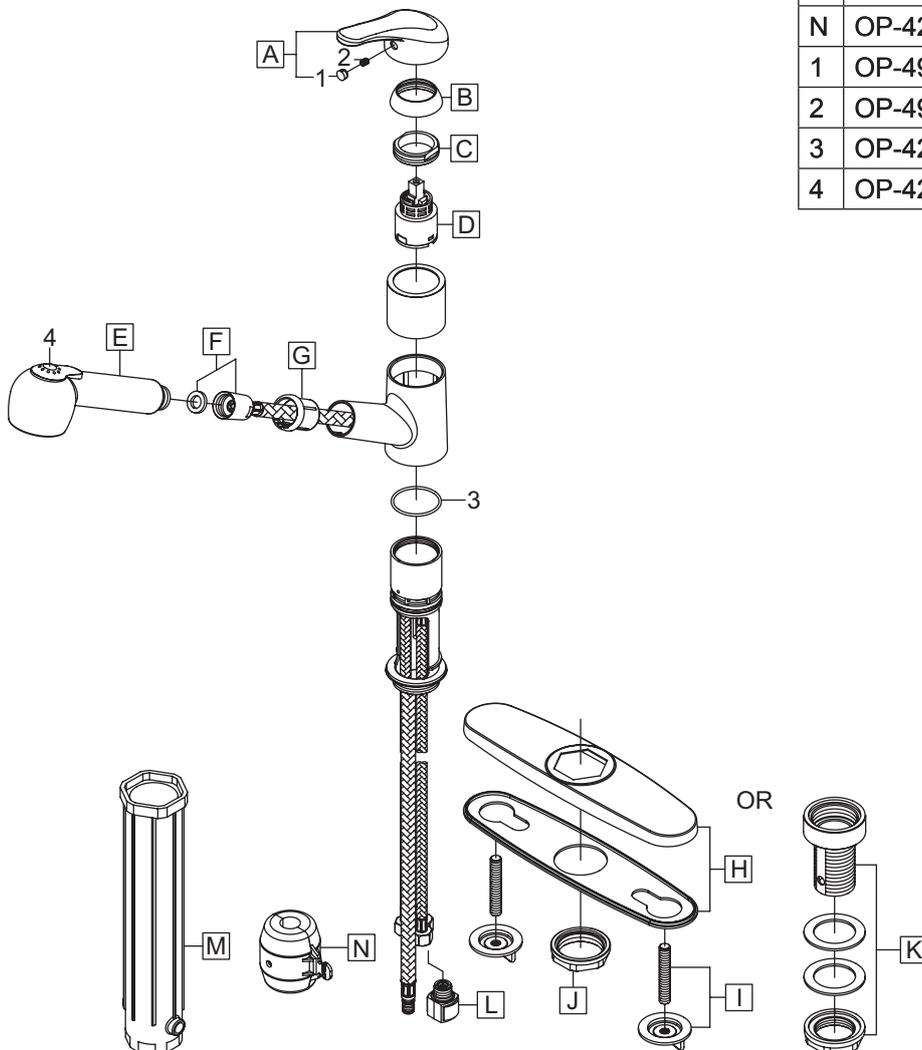

For more care information or trouble shooting inquiries about your Olympia product, Please call:  
**OLYMPIA FAUCETS, INC.** (888) 772-7701  
 Monday-Friday 8 AM to 8 PM EST (5 AM to 5 PM PST)  
[www.olympiafaucets.com](http://www.olympiafaucets.com)