SPECIFICATION SHEET



i2 SINGLE HANDLE LAVATORY FAUCET



Model #:
Specific Features:

Project Name:
Submitted For:

Date:

Lever Handle

4-3/4" Reach, 2-7/8" From Deck to Aerator

· Ceramic Disc Cartridge

1 Or 3-Hole 4" Installation

Brass Pop-Up Drain Assembly
Easy-Install 18" Flex Supply Lines With 3/8" Con-

nections

With 1.5 GPM Flow Rate

Deck Cover Plate Included

L-6052-WD SHOWN





Model #	Features	Finish	
L-6052-WD*		СР	
L-6052-WD-BN*		PVD BN	

^{*} Aerator limited to 1.2 GPM Flow Rate


Olympia products are engineered and manufactured to meet the following standards and codes:

ASME A112.18.1 ANSI A117.1 IAPMO LISTED

ANSI / NSF 61, SECTION 9

CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT



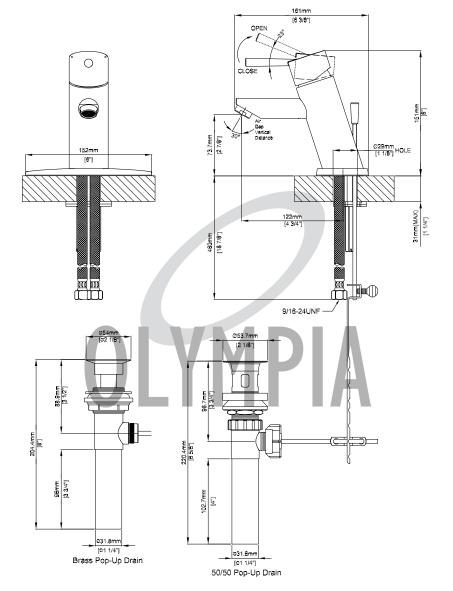

Commerce, CA www.olympiafaucets.com Olympia Faucets, Inc. © 2017 A Pioneer Industries Inc. Brand DMSPL-6052-WD/REV. 11.17

^{*} E0.5 - 0.5 GPM Flow Rate Aerator Available upon request