

SPECIFICATION SHEET



ACCENT TWO HANDLE LAVATORY WIDESPREAD FAUCET



Model #: _____
Specific Features: _____
Project Name: _____
Submitted For: _____
Date: _____

- Lever Handles
- C' Style Spout
- 4-9/16" Reach, 1-7/8" From Deck to Aerator
- Washerless Cartridge Operation
- 3-Hole 4" to 16" Installation
- Brass Pop-Up Drain Assembly
- With 1.2 GPM Flow Rate

L-7332 SHOWN **ADA**

Model #	Features	Finish	
L-7332*		CP	
L-7332-BN*		PVD BN	
L-7332-ORB*		ORB	

Olympia products are engineered and manufactured to meet the following standards and codes:


- ASME A112.18.1
- ANSI A117.1
- ANSI / NSF 61, SECTION 9
- IAPMO LISTED
- CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT

* Aerator limited to 1.2 GPM Flow Rate
 * E0.5 - 0.5 GPM Flow Rate Aerator Available upon request
Note:

1. Mounting surface hole size to be 1-1/4".
2. Max. mounting deck thickness to be 1-1/8".



Certified by IAPMO R&T

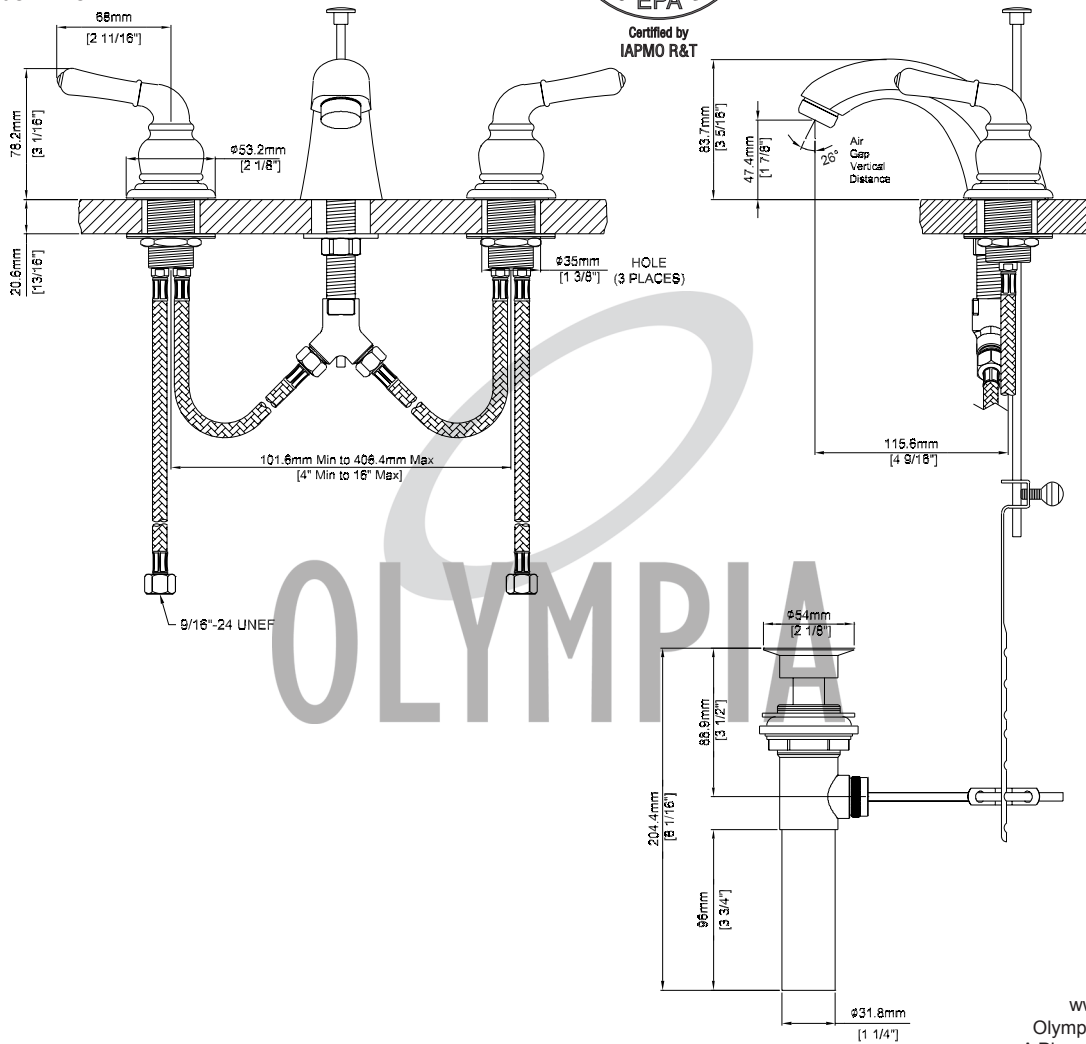

Brass Pop-Up Drain