



**OLYMPIA FAUCETS, INC.**  
 3325 S. Garfield Ave.  
 Commerce, CA 90040  
 (888) 772-7701  
 www.olympiafaucets.com

# INSTALLATION

**Tools:**



Adjustable Wrench Phillips screwdriver Plumbers Putty Teflon Tape Rags

**Model Number: ACS-903600, ACS-903700**




**Warnings and Notes:**


Check with local plumbing code requirements before installation.  
 This product should be installed by a local listed plumber.  
**Do not use plumbers putty on threads.**

**Installation Steps:**


Glass Washer

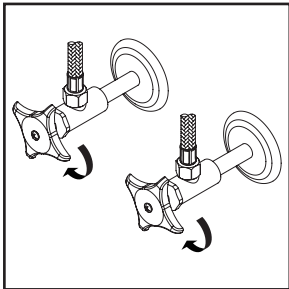


(1) Shut off angle stop valves before installing glass Washer.

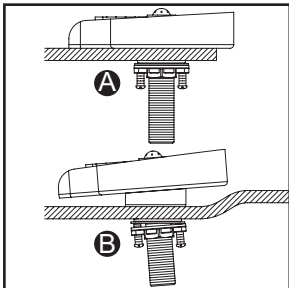


(2) A: For sinks with level ledger/ Granite. Don't need the plastic spacer.  
 B: For sinks with the raised ledges. Put the Plastic spacer on the sink hole with foam washer side downward.

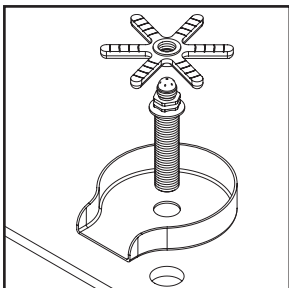


(3) Put the base on the sink hole. Screw the actuator arms onto the shank. Insert the shank into the hole.

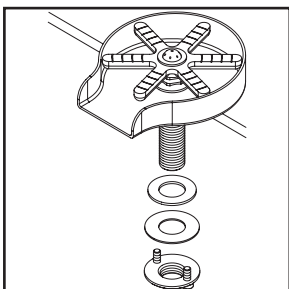


(4) Put the gasket and steel washer onto the shank then thread locknut onto the shank and hand-tighten locknut till it won't go further from underneath the sink.

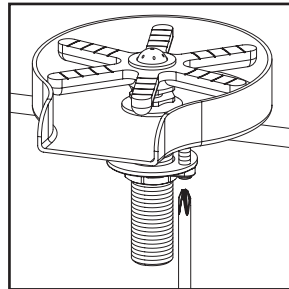


(5) Tighten screws on locknut with the help of a Phillips head screwdriver. (Note: Do not overtighten.)

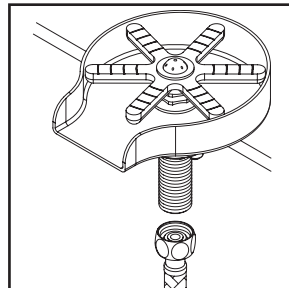

(6) Attach 1/2" end of provided inlet supply hose to mounting shank with wrench.

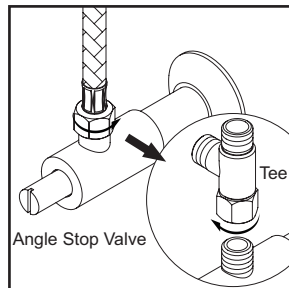

(7) Loosen inlet supply hose end from outlet of angle stop valve, apply Teflon tape on the outlet threaded end of angle stop valve. Attach and tighten tee to the outlet of angle stop valve with help of adjustable wrench.

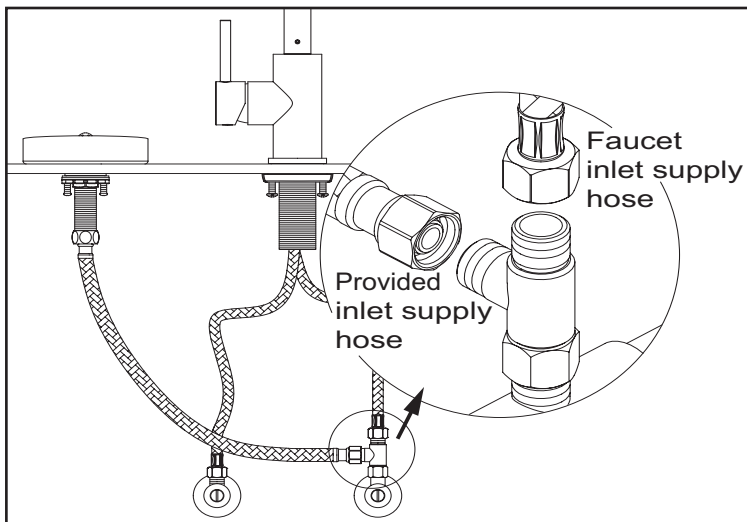

(8) Attach and tighten both 3/8" end of inlet supply hoses to tee with help of adjustable wrench. Turn on angle stop valves to check for leaks and make sure glass washer functions properly.



For more care information or trouble shooting inquiries about your Olympia product, Please call:  
**OLYMPIA FAUCETS, INC.** (888) 772-7701  
Monday-Friday 8 AM to 8 PM EST (5 AM to 5 PM PST)  
[www.olympiafaucets.com](http://www.olympiafaucets.com)