



TOP VIEW

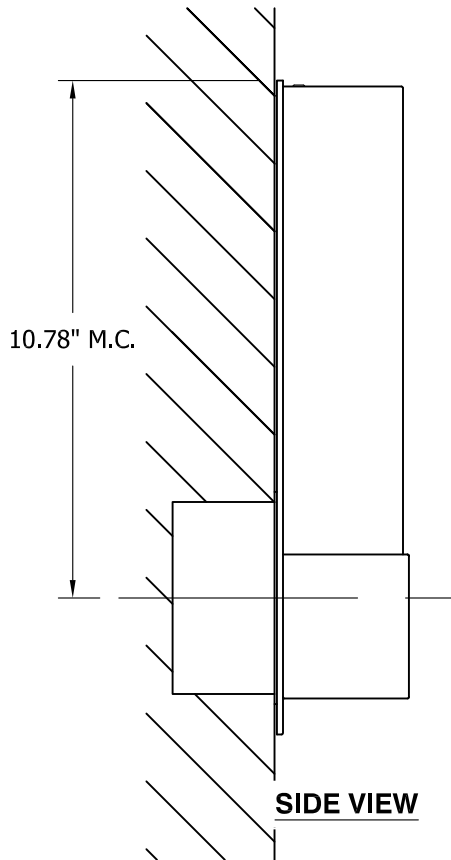

SIDE VIEW

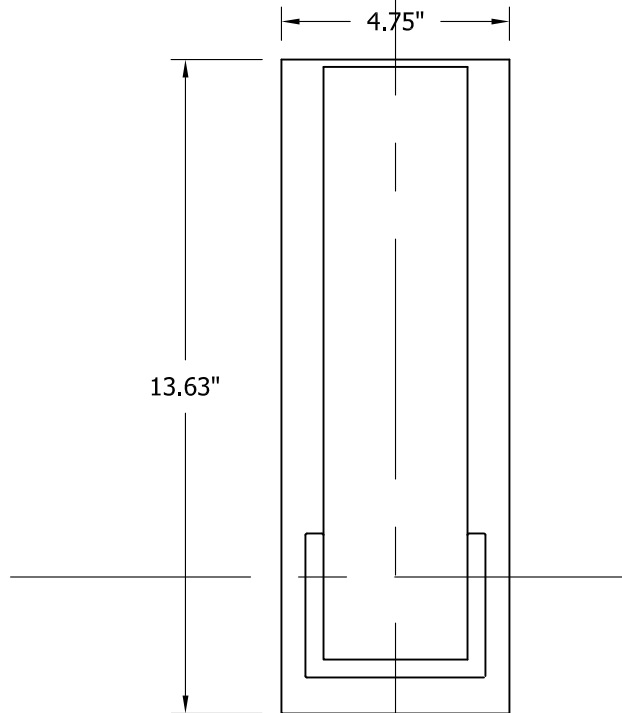

FRONT VIEW

ORION sconce
 120v **3-540-40**
 277v **37-540-40**

OXYGEN LIGHTING ©

LAMPING

- o (1x) 12.2w LED Array
- o 3000k, 350mA
- o Initial Lumens: 1752 lm
- o Delivered Lumens: 484 lm
- o CRI > 80
- o Color Consistency: 3 step MacAdam Ellipse

DRIVER (Dimmable)

- o (1x) 0-10v & Reverse Phase Dimming Constant Current, 12W, 350mA

METAL FINISHES

- o **14** - Polished Chrome
- o **24** - Satin Nickel
- o **40** - Aged Brass

DIFFUSER

- o Matte White Acrylic

INPUT VOLTAGE

- o 120v OR 277v 50/60Hz

DIMENSIONS

- o 4.75" (w) X 13.63" (h) X 2.80" (ext.)

INSTALLATION

- o 2" x 3" J-Box
- o 4" Octagon J-Box
- o 4" x 4" J-Box
- o ETL Dry/Damp Listed
- o ADA
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0



Sample Catalog Number			
Series #	Finish	=	Catalog Number
3-540	24	=	3-540-24

oxygen

OXYGEN LIGHTING
 201 RAILHEAD RD, FORT WORTH, TX 76106
 TEL. (877) 607-0202 FAX (877) 607-0203
 WWW.OXYGENLIGHTING.COM

PROJECT: _____
 DATE: _____

