


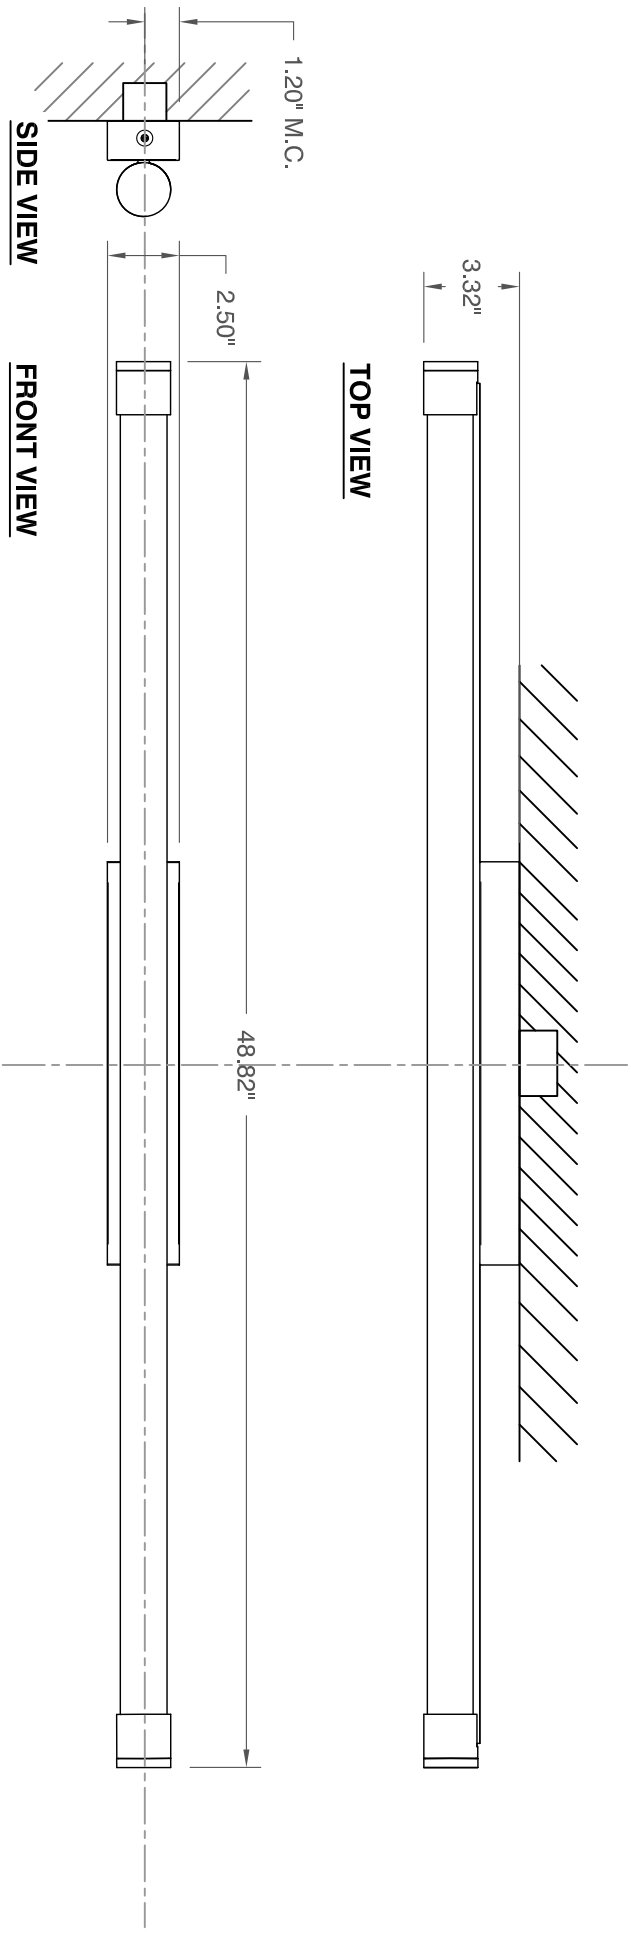

OXYGEN LIGHTING ©

Zenith vanity
120V **3-559-14**
277V **37-559-14**

LAMPING

- o (2x) 11.6w LED array
- o 3000K, 350mA (ea.)
- o Initial Lumens: 3758 lm
- o Delivered Lumens: 2356 lm
- o CRI>80
- o Color Consistency: 3 Step MacAdam Ellipse

DRIVER (Dimming)

- o (2x) 0-10v & Reverse Phase Dimming, Constant Current, 12w, 350mA

INPUT VOLTAGE

- o 120V OR 277V 50/60Hz

METAL FINISHES

- o **14** - Polished Chrome
- o **24** - Satin Nickel

DIFFUSER

- o Matte White Acrylic

DIMENSIONS

- o 48.82" (w) x 2.50" (h) x 3.32" (ext.)

INSTALLATION

- o 2" x 3" J-Box
- o ETL Dry/Damp Listed
- o ADA
- o Conforms to UL STD 1598
- o Certified CAN/CSA
- STD C22.2 No. 250.0



Sample Catalog Number

Series # **3-559** - Finish **14** = Catalog number **3-559-14**

PROJECT: _____

DATE: _____

oxygen

OXYGEN LIGHTING
201 RAILHEAD RD, FORT WORTH, TX 76106
TEL. (877) 607-0202 FAX (877) 607-0203
WWW.OXYGENLIGHTING.COM

