


FRONT VIEW

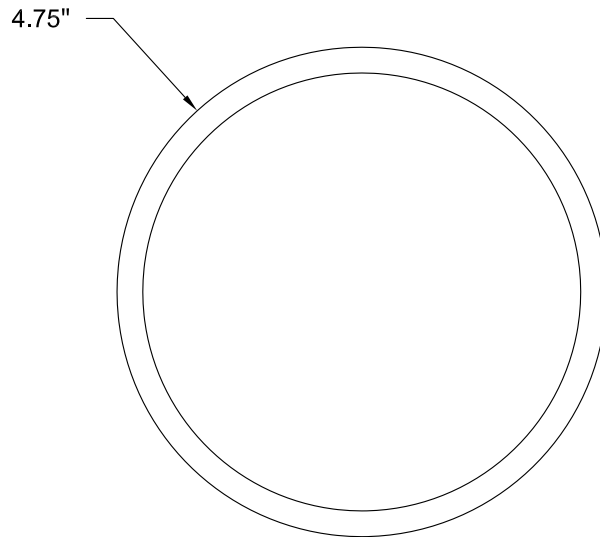

BOTTOM VIEW

PEEPERS surface
 120v **3-600-22**
 277v **37-600-22**

OXYGEN LIGHTING ©

LAMPING

- o (1x) 8.2w LED Array
- o 3000k, 350mA
- o Initial Lumens: 1173 lm
- o Delivered Lumens: 293 lm
- o CRI > 80
- o Color Consistency: 3 step MacAdam Ellipse

DRIVER (Dimmable)

- o (1x) 0-10v & Reverse Phase Dimming Constant Current, 12W, 350mA

METAL FINISHES

- o **22** - Oiled Bronze
- o **24** - Satin Nickel
- o **40** - Aged Brass

DIFFUSER

- o Matte White Acrylic

INPUT VOLTAGE

- o 120v OR 277v 50/60Hz

DIMENSIONS

- o 4.75" (w) x 4.75" (h) x 2.00" (ext.)

INSTALLATION

- o 2" x 3" J-Box
- o 4" Octagonal J-Box
- o ETL Dry/Damp Listed
- o ADA
- o Approved for ceiling or wall mount application
- o Conforms to UL STD 1598
- o Certified CAN/CSA STD C22.2 No. 250.0



Sample Catalog Number			
Series #	Finish	=	Catalog Number
3-600	24	=	3-600-24

oxygen

OXYGEN LIGHTING
 201 RAILHEAD RD, FORT WORTH, TX 76106
 TEL. (877) 607-0202 FAX (877) 607-0203
 WWW.OXYGENLIGHTING.COM

PROJECT: _____
 DATE: _____

