


# IDOL Pendant

## 3-635-xx

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_ DATE \_\_\_\_\_

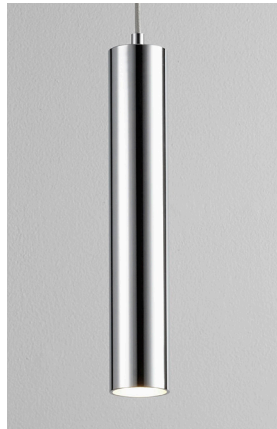


-18 Gunmetal

-14 Polished Chrome

-24 Satin Nickel

|                                    |   |
|------------------------------------|---|
| <b>LIGHT SOURCE</b>                | 1 x 6.2W LED, 3000K, CRI 90   |
| <b>LUMINAIRE POWER</b>             | 6.64W at 120V   |
| <b>RATED LIFE</b>                  | 60000 hr RL   |
| <b>OPTIONAL COLOR TEMPERATURES</b> | 2700K, 3500K, 4000K   |
| <b>LUMEN OUTPUT</b>                | Delivered: 334 lm (LM-79)   |
| <b>INPUT VOLTAGE</b>               | 120V to 277V AC, 50/60Hz  |
| <b>DRIVER OUTPUT</b>               | 180mA, 7.6W max   |
| <b>DIMMING</b>                     | TRIAC and ELV dimming at 120V AC;<br>0-10V dimming, 100% to 10% current output                                |
| <b>CONSTRUCTION</b>                | Plated Steel  |
| <b>DIFFUSER</b>                    | No diffuser   |
| <b>FINISHES</b>                    | Polished Chrome (-14), Gunmetal (-18), Satin Nickel (-24)   |
| <b>MOUNTING</b>                    | 4" Octagonal J-Box*,<br>4"x4" J-Box* with a single device mud ring<br>* Deep J-Box (Required to house driver) |
| <b>STANDARDS</b>                   | UL Dry/Damp listed, Conforms to UL STD 1598,<br>Certified CAN/CSA, STD C22.2 No 250.0.                        |

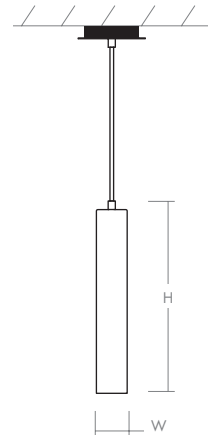

### DIMENSIONS

**Dia. Canopy: 5.88"**

**Dia. Fixture: 2.70"**

**H. Fixture: 16.85"**

**Supplied with 8 ft braided cord**

Order example for standard fixture:

**3-635-24** (x- Voltage - xxx-Sequence # - xx-Finish)

**3:** 120V to 277V

Order example for optional color temperatures: **3-635-2724**

**27:** 2700K, **35:** 3500K, **40:** 4000K

