
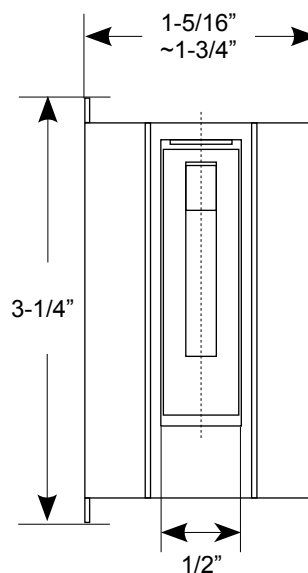
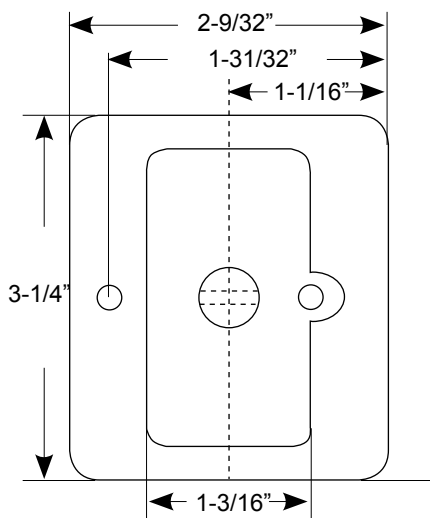


Specifications	
Door Prep.	Door Notching: 1-3/4" Depth x 2-7/8" High Frame Bore: 1" Hole and 1/2" Deep
Door Thickness	1-5/16" to 2-1/2" Door
Strike Plate	1-1/16x2-1/2" square corner standard
Handing	Non-Handed
Bolt	5/16" hook on Privacy only
ANS/BHMA	A 156.2 Grade 3

Function	Description
Privacy	Locked or unlocked by turnpiece inside to operate the hook. Outside unlocked by coin or screwdriver
Passage	For door where only a pull is required

*Finish Availability - US 3, 5, 10B, 11P, 15A, 26, 26D

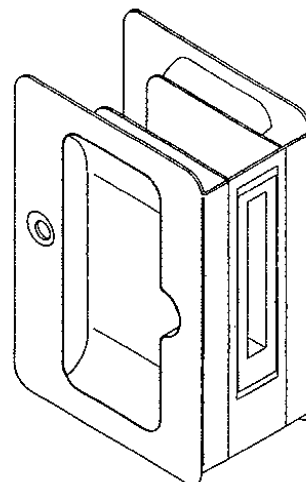

Notching Dimensions

