
PEERLESS

Min.2 1/2" (64 mm) Mounting without escutcheon plate Clearance to Back Splash Recommended 4 5/16" 8 5/8" (109 mm (219 mm) 3 3/16" (81 mm) 9 1/8" 16 1/8" (231 mm) (410 mm) 2 1/4" (57 mm) 1 5/16"~1 1/2" 2 5/8" (66 mm) (33~38mm) Max. Deck Hole Size Thickness 30" (762 mm) 3/8" compression fitting→ 🖽 Min.2 1/2" (64 mm) Clearance to Back 4 5/16" Mounting with Splash Recommended 8 5/8" (109 mm escutcheon plate (219 mm) 3 3/16" (81 mm) 16 7/16" (418 mm) 9 7/16" (239 mm) 10 7/16" 2 11/16" (265 mm) (69 mm) 1 5/16"~1 1/2" 2 5/16" (59 mm) (33~38mm) Max. Deck Hole Size Thickness 29 11/16" (754 mm) 3/8" compression fitting-

▲ Designate proper finish suffix PSP-K-P7971LF Rev A

P7971LF▲

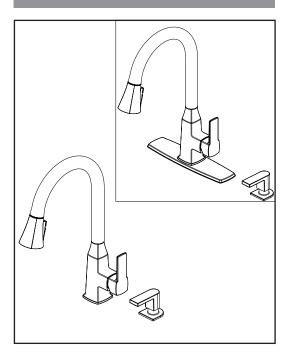

KITCHEN FAUCETS

- Ezra™ Collection
- Single handle pull-down
- 1, 2, 3 or 4 Hole Sink Applications

STANDARD SPECIFICATIONS:

- Maximum 1.5 qpm @ 60 psi, 5.7 L/min @ 414 kPa
- One, two, three, four hole mount options (escutcheon and soap dispenser optional, sold separately)
- 3 function wand: aerated stream, spray, POWERinse™
- Dual integral check valves in sprayer hose
- Ceramic cartridge
- Spout rotates 360°
- Red/Blue indicator markings
- Polymer braided flexible supply hose with with 3/8" compression fitting - 30" (762mm) long

WARRANTY

 Parts and Finish – Lifetime limited warranty; or for commercial purchasers, 10 years for multi-family residential (apartments and condominiums) and 5 years for all other commercial uses, in each case from the date that the product is received by the original purchaser or their authorized representative (installation contractor, etc.).

COMPLIES WITH:

ASME A112.18.1 / CSA B125.1 Indicates compliance to ICC/ANSI A117.1 - Valve control only