

## Specifications

### Features

- 1.8 GPM Flow Rate
- 360° Rotating Spout
- Adjustable Install
- All Metal Construction
- High Arc Spout
- Mounting Hardware Included
- Mounting Posts Included
- Pfaster Connect

- Soap Dispenser Included
- Side Spray Included
- Pforever Seal Ceramic Disc Valves
- Pforever Warranty®


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- EPA WaterSense Certification 1.2 gpm, 4.5L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



## Dimensions

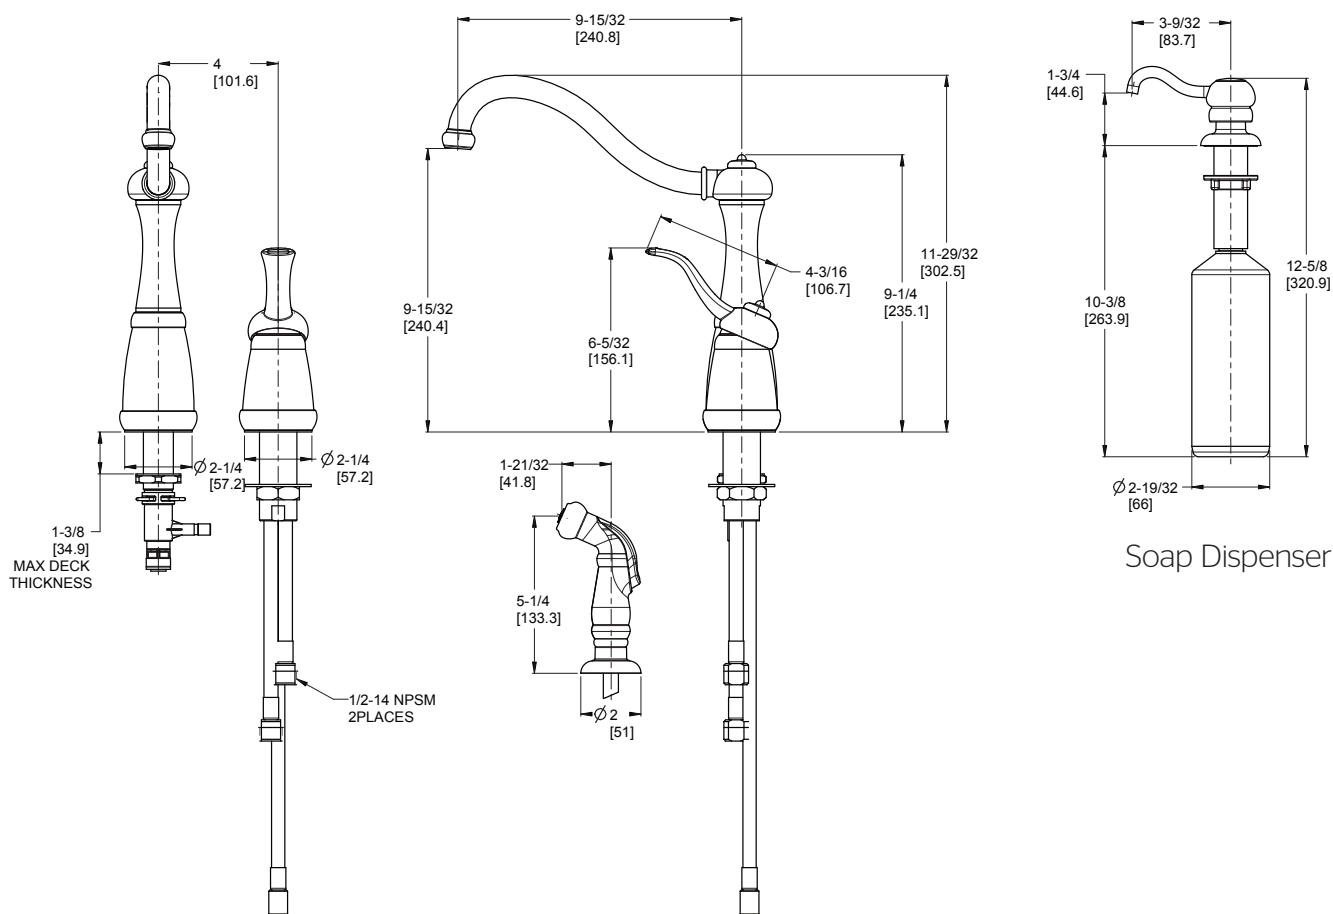

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings