


## Modern Tub Filler

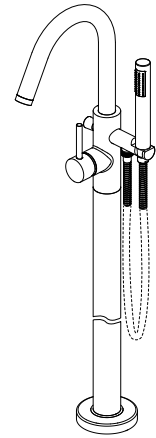

- LG6-1MFC Finish(C)
- LG6-1MFD Finish(D)
- LG6-1MFK Finish(K)
- LG6-1MFY Finish(Y)

## Specifications

- All Metal Construction
- Trim Only, Valve Not Included

### Features

- 1.8 GPM Flow Rate (Handheld)
- 6 GPM @ 45 PSI Flow Rate
- All Metal Construction
- Ceramic Disc Valve
- Mounting Hardware Included
- Volume and Temperature Control
- Requires OX6-260R (Sold Separately)
- Pforever Warranty®


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- CEC Compliant
- NSF 61/9 Annex G (Low lead)
- ADA Compliant-ANSI A117.1 (Lever handles only)
- ASME A112.18.3 (Backflow Prevention)



## Dimensions

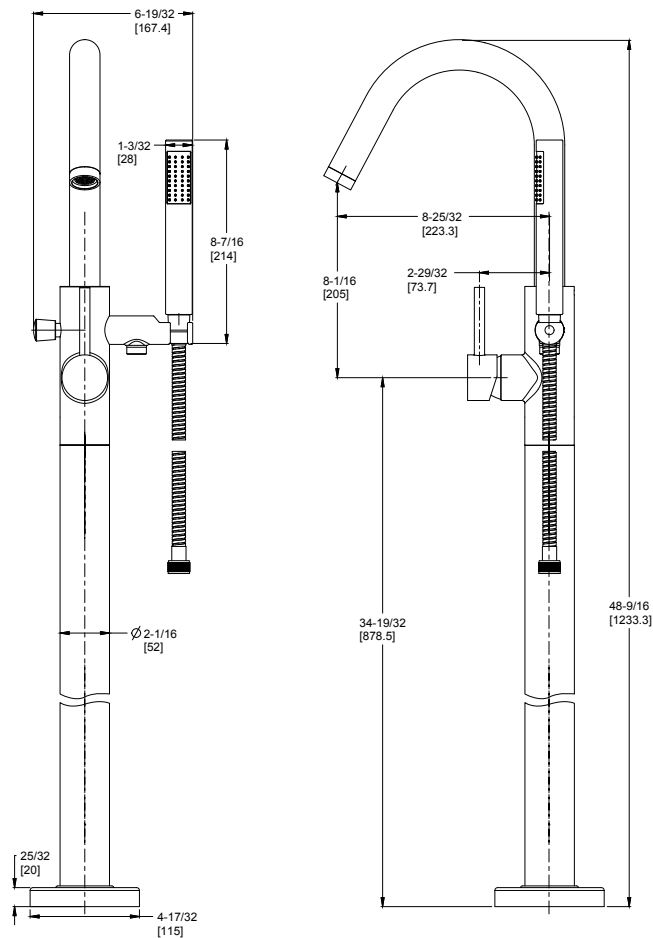

Ø3-3/8Max. Deck Hole Openings