


- LG16-3TNTC Finish(C)
- LG16-3TNTK Finish(K)
- LG16-3TNTB Finish(B)
- LG16-3TNTBG Finish(BG)

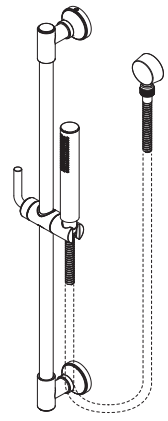

Specifications

Features

- 1.8 GPM Flow Rate
- 60" Metal Hose
- Adjustable Heights
- Adjustable Cradle
- All Metal Handheld
- Easy to Clean Nozzles
- Works with Tenet Diverter Trim and Valve
- Includes Mounting Hardware
- Not To Be Used As A Grab Bar
- Optional Crosshandle Available, Order HHL-G16-TNT* Separately
- Pforever Warranty®

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
 - ASME A112.18.3 (Backflow Prevention)
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant



Dimensions

