


Rhen Tub Filler

- LG6-1RHC Finish(C)
- LG6-1RHK Finish(K)
- LG6-1RHB Finish(B)
- LG6-1RHBG Finish(BG)

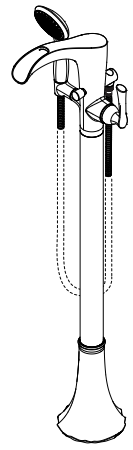

Specifications

- All Metal Construction
- Trim Only, Valve Not Included

Features

- 8 GPM @ 45 PSI Flow Rate
- 1.8 GPM Flow Rate (Handheld)
- 60" Metal Hose
- All Metal Construction
- Ceramic Disc Valve
- Easy to Clean Nozzles
- Forward Handle Operation
- Trough Spout
- Optional Concrete Mounting Bracket 931-145 Available (Sold Separately)
- Requires OX6-27OR Valve (Sold Separately)
- Volume and Temperature Control
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- CEC Compliant
- CAL Green Compliant
- ADA Compliant-ANSI A117.1 (Lever handles only)
- EPA WaterSense Certification 1.8 gpm, 6.8L/Min
- ASME A112.18.3 (Backflow Prevention)



Dimensions

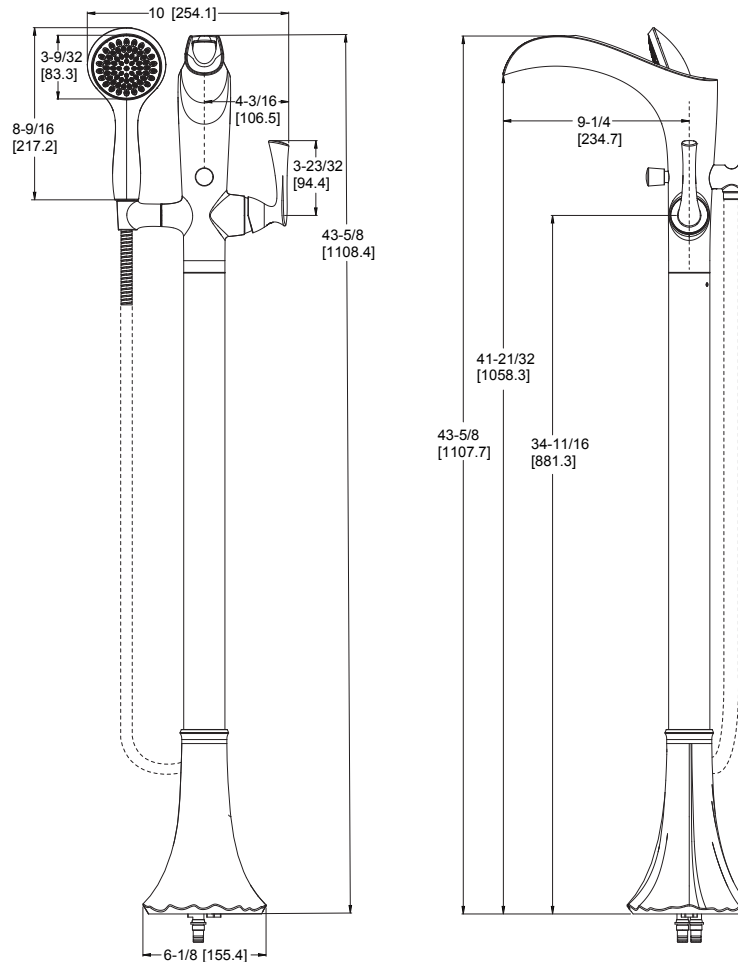

Ø3-3/8Max. Deck Hole Openings