


Single Control Lavatory Faucet



- LG42-TNTC Finish(C)
- LG42-TNTK Finish(K)
- LG42-TNTB Finish(B)
- LG42-TNTBG Finish(BG)

Specifications

- 1 or 3-Hole Installation
- All Metal Construction
- Pforever Seal

Features

- 1.2 GPM Flow Rate
- All Metal Construction
- 1 or 3-Hole Installation
- Laminar Water Flow
- Optional Deckplate, Order 961-235*
- Side Handle Operation
- Order Install Kit 962-122 For Decks That Are Thinner Than 1/2" [12.7]
- Push&Seal™ All Metal Drain
- Pforever Seal Ceramic Disc Valve
- Pforever Warranty®


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- NSF 61/9 Annex G (Low lead)
- CEC Compliant
- Cal Green Compliant
- EPA WaterSense Compliant 1.2 gpm, 4.5L/Min
- ADA Compliant-ANSI A117.1 (Lever handles only)



Dimensions

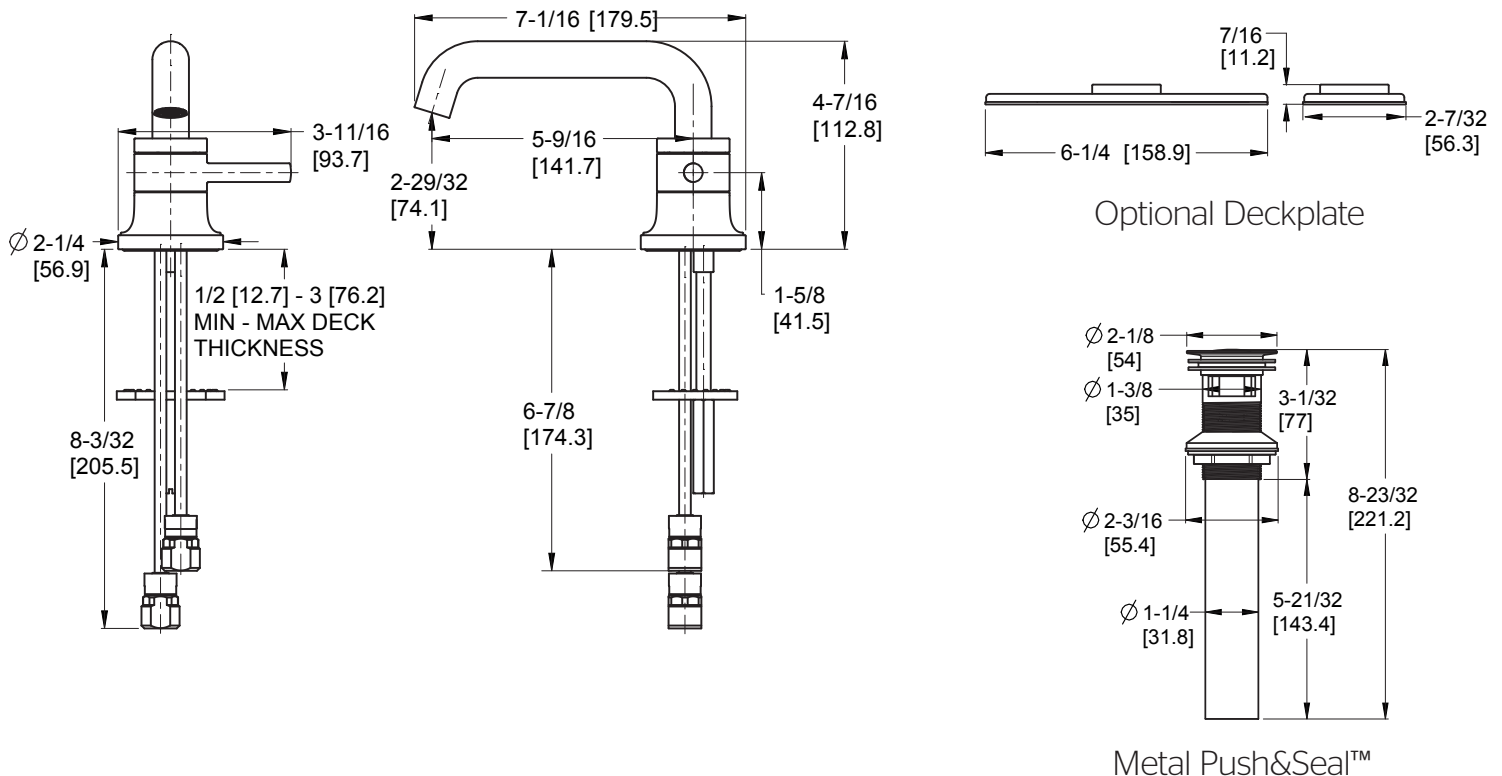

Ø1 Min to Ø1-1/2 Max. Deck Hole Openings