


## Round Modern Showerhead



- USH-01SHWB Finish(B) ☐
- USH-01SHWBG Finish(BG) ☐
- USH-01SHWC Finish(C) ☐
- USH-01SHWD Finish(D) ☐
- USH-01SHWK Finish(K) ☐

## Specifications

### Features

- Single Function Rain Showerhead
- 1.75 GPM Flow Rate
- Brass Ball Joint
- Premium Metal Construction
- Wipe Clean Nozzles
- Order 941-O55 for 1.5 GPM Flow Rate
- Limited Lifetime Warranty


### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- EPA WaterSense Compliant
- CEC Certified/CALGreen compliant



## Dimensions


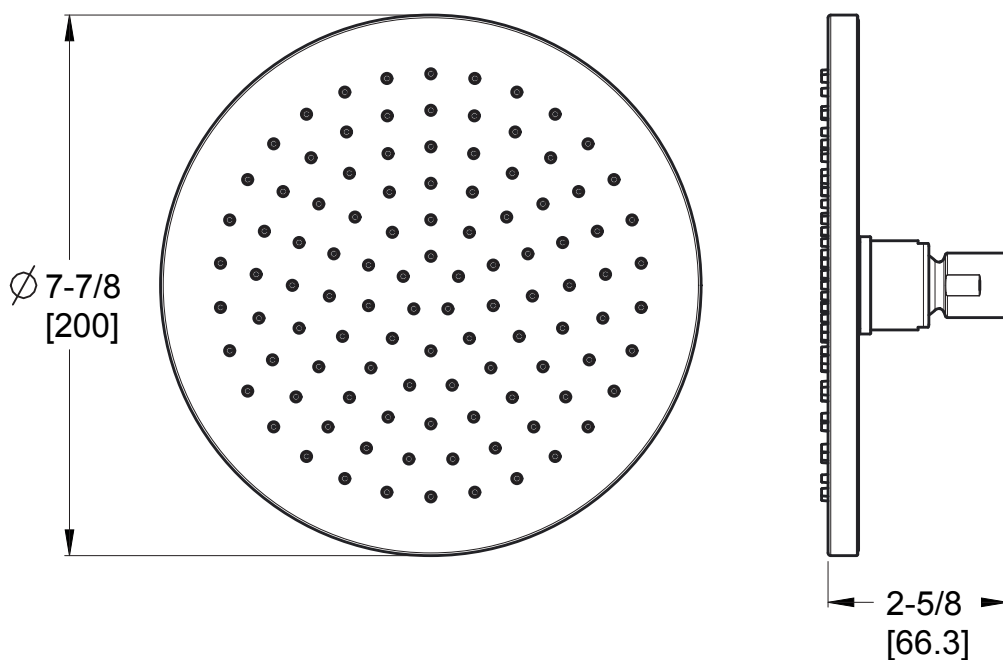


OX8-310A Finish(XX) ☐

OX8-340A Finish(XX) ☐

JX8-310A Finish(XX) ☐

JX8-340A Finish(XX) ☐



## Specifications

### Features

- Metal Stem
- Dual 1/2" I.P. or 1/2" Copper Sweat Connections
- Job Pack of 12 (JX8 Only)
- Integral Stops (340A Only)
- Back-to-Back Installation
- Temperature Limit Stop Included
- Anti-Scald Shower Cartridge
- Solid Brass Construction
- Spool Pressure Balance Valve
- Includes Plug for Shower Only
- Valve Only
- Pforever Warranty®

### Code Compliance


Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified
- CSA B125 Certified
- ASME A112.18.1
- ASSE 1016
- ADA Compliant-ANSI A117.1 (Lever handles only)




## Dimensions


OX8-340A/ JX8-340

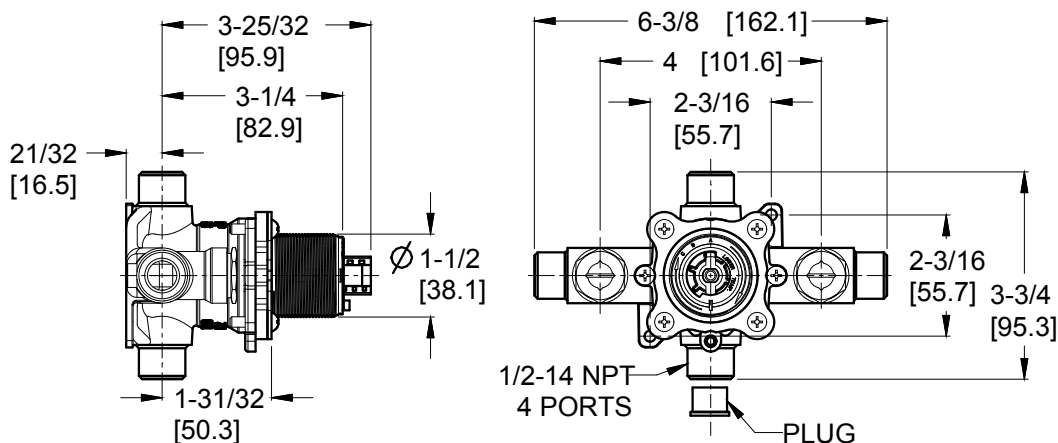

OX8-310A/ JX8-310

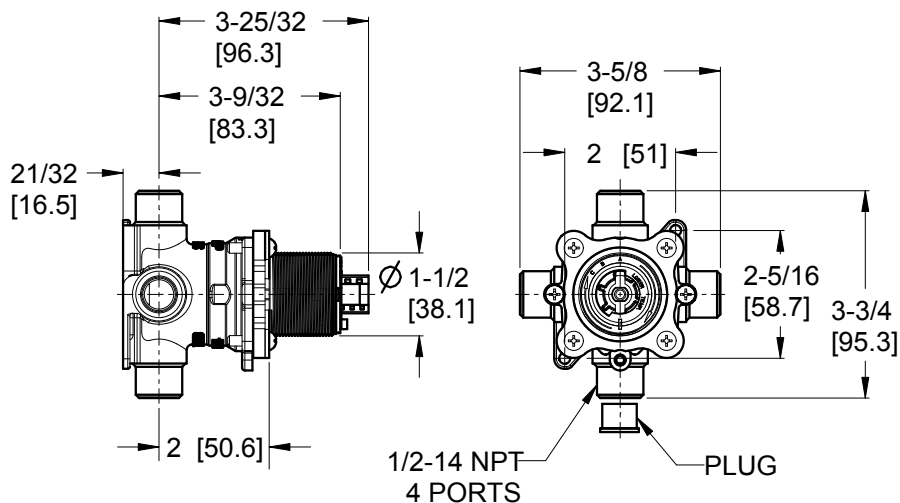

## Shower Column

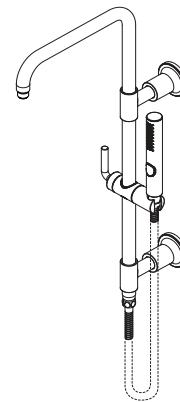

- HSK-70SHWB Finish(*B*) ☐  
 HSK-70SHWBG Finish(*BG*) ☐  
 HSK-70SHWC Finish(*C*) ☐  
 HSK-70SHWD Finish(*D*) ☐  
 HSK-70SHWK Finish(*K*) ☐

## Specifications

## Features

- Showerhead Sells Separately
- 1.75 GPM Flow Rate
- 60" Metal Hose
- Adjustable Heights Handheld
- All Metal Construction
- Easy to Clean Nozzles
- Handheld with Integrated Push Button Diverter
- 7/8" Extension Kit Available, Order 931-1599 Separately
- Includes Mounting Hardware
- Limited Lifetime Warranty


## Code Compliance


Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1 including:
  - ASME A112.18.3 (Backflow Prevention)
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant



## Dimensions

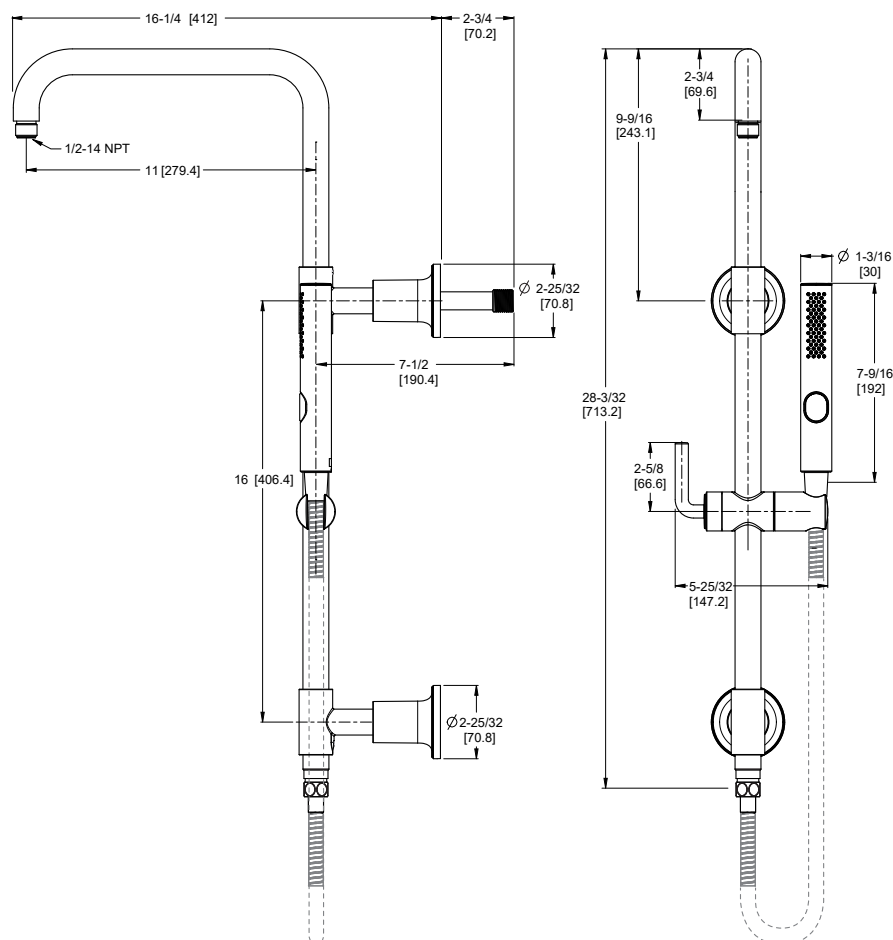



R89-1TNTC Finish(C) <input type="checkbox"/>	LG89-7TNTC Finish(C) <input type="checkbox"/>	LG89-8TNTC Finish(C) <input type="checkbox"/>
R89-1TNTD Finish(D) <input type="checkbox"/>	LG89-7TNTD Finish(D) <input type="checkbox"/>	LG89-8TNTD Finish(D) <input type="checkbox"/>
R89-1TNTK Finish(K) <input type="checkbox"/>	LG89-7TNTK Finish(K) <input type="checkbox"/>	LG89-8TNTK Finish(K) <input type="checkbox"/>
R89-1TNTB Finish(B) <input type="checkbox"/>	LG89-7TNTB Finish(B) <input type="checkbox"/>	LG89-8TNTB Finish(B) <input type="checkbox"/>
R89-1TNTBG Finish(BG) <input type="checkbox"/>	LG89-7TNTBG Finish(BG) <input type="checkbox"/>	LG89-8TNTBG Finish(BG) <input type="checkbox"/>

## Specifications

### Features

- 1.8 GPM Flow Rate (Showerhead)
- All Metal Construction
- Metal Raincan Showerhead
- Brass Ball Joint
- SecurePfit™ with Anti-Handle Wobble
- Trim Only, Valve Not Included
- Easy to Clean Nozzles
- IP Threaded Diverted Spout (8TNT Only)
- Optional Crosshandle Available, Order HHL-089-TNT\* Separately
- Hold/Cold Indicator
- Metal Lever Handle
- Requires OX8/JX8 Valve (Sold Separately)
- Valve Trim Only (1TNT Only)
- Shower Only (7TNT Only)
- Tub & Shower (8TNT Only)
- Limited Lifetime Warranty

- SecurePfit™
- Trim Only, Valve Not Included

### Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- EPA WaterSense Certified
- CEC Certified/CALGreen compliant
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



## Dimensions

