

- | | |
|---|---|
| GT533-MDSBG Finish(BG) <input type="checkbox"/> | GT533-MSDS Finish(D) <input type="checkbox"/> |
| GT533-MDSC Finish(C) <input type="checkbox"/> | GT533-MDSGS Finish(GS) <input type="checkbox"/> |
| | GT533-MDSSDB Finish(SDB) <input type="checkbox"/> |

Specifications

- Wall Mount Installation
- Pforever Seal™

Features

- 3.5 GPM Flow Rate
- 1-Hole Installation
- All Metal Construction
- 360° Rotating Spout
- Dual Shut Off Levers
- Mounting Hardware Included
- Swing Out Design
- Double Jointed Foldable Spout Arms
- 24" Full Extension
- 1/4 Turn Handles
- Spot Defense™ Finish Resists Spots and Fingerprints (SDB and GS Only)
- Cold Water Installation Recommended
- Pforever Seal™ Ceramic Disc Valves
- Limited Lifetime Warranty


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:



- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q≤1
- ADA Compliant - ANSI A117.1 (Lever Handles Only)

Dimensions

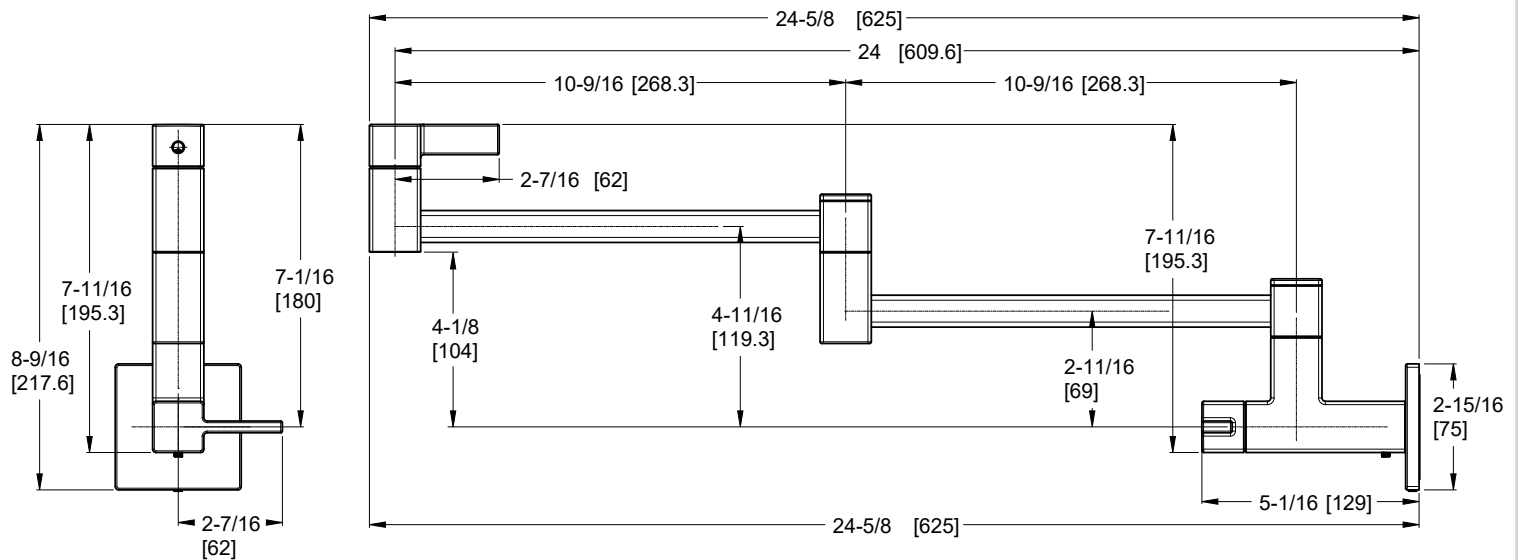

Pipe Size: 1/2-14 NPT

Pipe's Protrusion From Wall: 5/16" (7.9mm) Min.

Wall Hole Size: 1-3/8 (34.9mm) min to 1-1/2 (38.1mm) Max.