


LG49-TBOSCBG Finish(BG) ☐

LG49-TBOSCC Finish(C) ☐

LG49-TBOSCD Finish(D) ☐

LG49-TBOSCK Finish(K) ☐

LG49-TBOSCSDB Finish(SDB) ☐



- All Metal Construction
- 3-Hole Installation
- Pforever Seal™

Specifications

Features

- 1.2 GPM Flow Rate
- All Metal Construction
- 1/4 Turn Brass Cartridges
- Includes Metal Pop-Up Drain
- Pforever Seal™ Ceramic Disc Valves
- Limited Lifetime Warranty


Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN61:Q ≤ 1
- CEC Certified/CALGreen compliant
- EPA WaterSense Certified



Dimensions

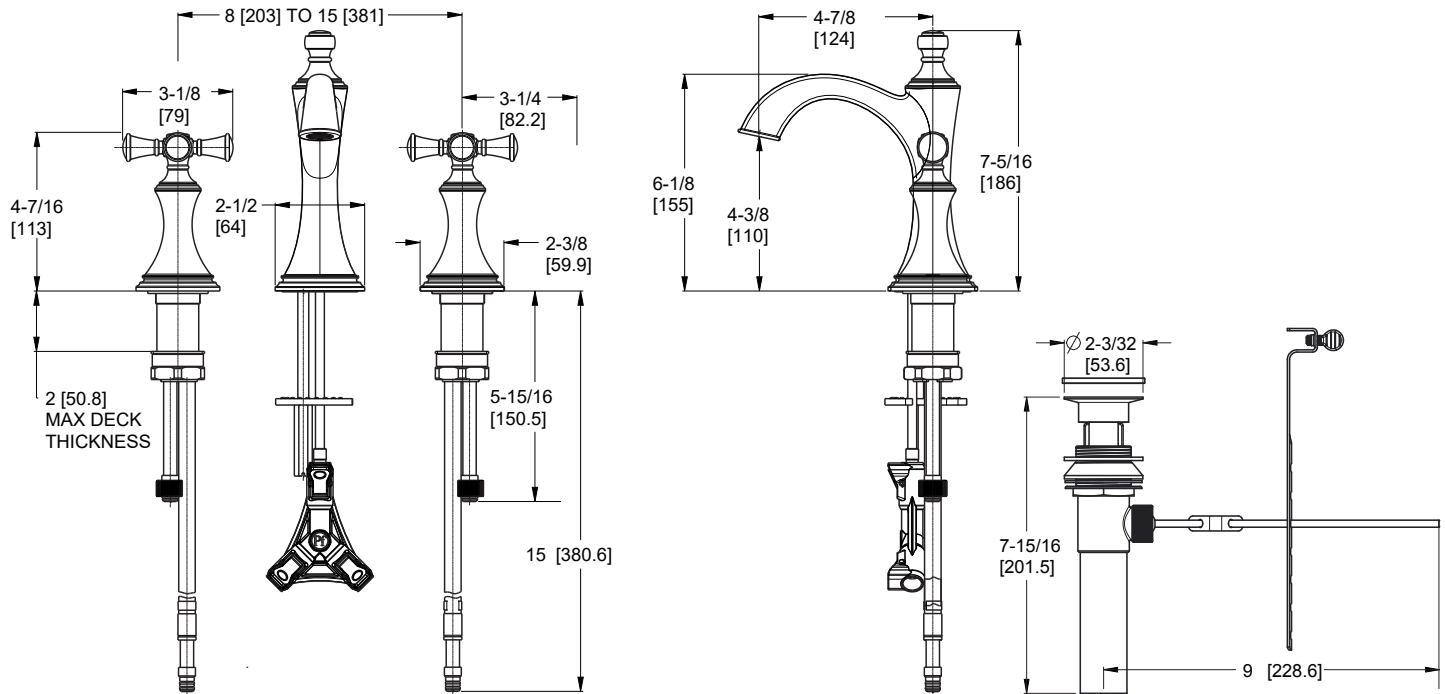

Ø1-1/4 Min to Ø1-1/2 Max. Deck Hole Openings

Metal Pop-Up Drain