


- LG89-7HLSB Finish(B) ☐
- LG89-7HLSBG Finish(BG) ☐
- LG89-7HLSC Finish(C) ☐
- LG89-7HLSD Finish(D) ☐
- LG89-7HLSK Finish(K) ☐

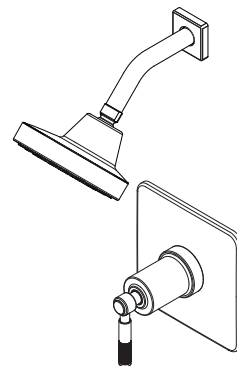

Specifications

Features

- 1.75 GPM Flow Rate
- All Metal Construction
- SecurePfit™ with Anti-Handle Wobble
- Tub Spout Not Included
- Requires OX8/JX8 Valve (Sold Separately)
- Trim Only, Valve Not Included
- 5 Function Sprayhead
(Full Spray, Massage, Full/ Massage Combo, HyrdoFuse™, HydroFuse™/Full Combo)
- Brass Ball Joint
- Temperature Control Only
- Limited Lifetime Warranty

- SecurePfit™
- Trim Only, Valve Not Included

Code Compliance

Pfister products are designed and manufactured in compliance with the following standards and codes:

- IAPMO Certified to ASME A112.18.1/CSA B125.1
- CEC Certified/CALGreen compliant
- EPA WaterSense Certified
- ADA Compliant - ANSI A117.1 (Lever Handles Only)



Dimensions

