



PIONEER INDUSTRIES, INC.
3325 S. Garfield Ave.
Commerce, CA 90040
(800) 338-9468
www.pioneerind.com

INSTALLATION

Tools:



Adjustable Wrench



Plumbers Putty



Teflon Tape



Rags

Model Number: 3MT183, 3MT1813, 3MT1823

Warnings and Notes:

Check with local plumbing code requirements before installation.


This product should be installed by a local listed plumber.

Do not use plumbers putty on threads.




Installation Steps:


Single Handle Lavatory Faucet




(1) Shut off the water supply. Remove old faucet. Clean mounting surface in preparation for new faucet.



(2) Ensure there is a gasket under the faucet. Place the faucet in position on the sink. Thread locknut onto the faucet shank from underneath the sink. Position faucet to desired location from the top and hand-tighten locknut till it won't go further. Thread both screws on locknut and tighten screws on locknut with the help of a Phillips head screwdriver to secure faucet. (Note: Do not overtighten.)



(3) Connect hot and cold inlet supply hoses to supply stops. For 1/2" connection; use 3/8" male to 1/2" female adapter for installation. Adapters are optional and not provided with the faucet. Turn on both sides of the supply stop.




(4) Important: After installation is complete, remove the aerator. Turn on the water and allow both hot and cold water to run for at least one minute each. While water is running, check for leaks. Turn off the water and replace the aerator when finished.


Push Down Drain Installation:

"DO NOT USE THREAD SEALANTS, TEFLON TAPE ONLY"

"NO USE SELLADORES DE ROSCA, UTILIZAR SOLO CINTA DE TEFLON"




(1) Remove flange from drain body.



(2) Place a ring of plumbers putty on the bottom of the flange and apply Teflon tape on threaded tailpiece. Thread tailpiece to drain body. Insert flange through drain hole and attach drain body to flange from underneath the sink.

Please Note: Use Teflon tape only on all thread connection areas. Using pipe thread sealant might weaken material structure and cause leaks.




(3) Remove the excess plumbers putty. Connect the trap (check manufacturer's instructions for installation).

Exploded Drawing:

* Note: Please specify finish/color when ordering.

	ITEM #	DESCRIPTION
A	OP-490062	1.2 GPM Aerator & Tool
B	X-3900003	Ceramic Disc Cartridge
C	X-4900018	Retainer Nut
D	X-4900017*	Cap
E1	X-1900008*	Motegi Lever Handle (For 3MT183)
E2	X-1300026*	Knurled Lever Handle (For 3MT1813)
E3	X-1300025*	Knurled Round Handle (For 3MT1823)
F	X-4300103	Gasket
G	OP-530006	Valve Mounting Kit
H	OP-630017*	Push Down Drain
1	X-4900044*	Hole Cover
2	X-4400024	Allen Screw

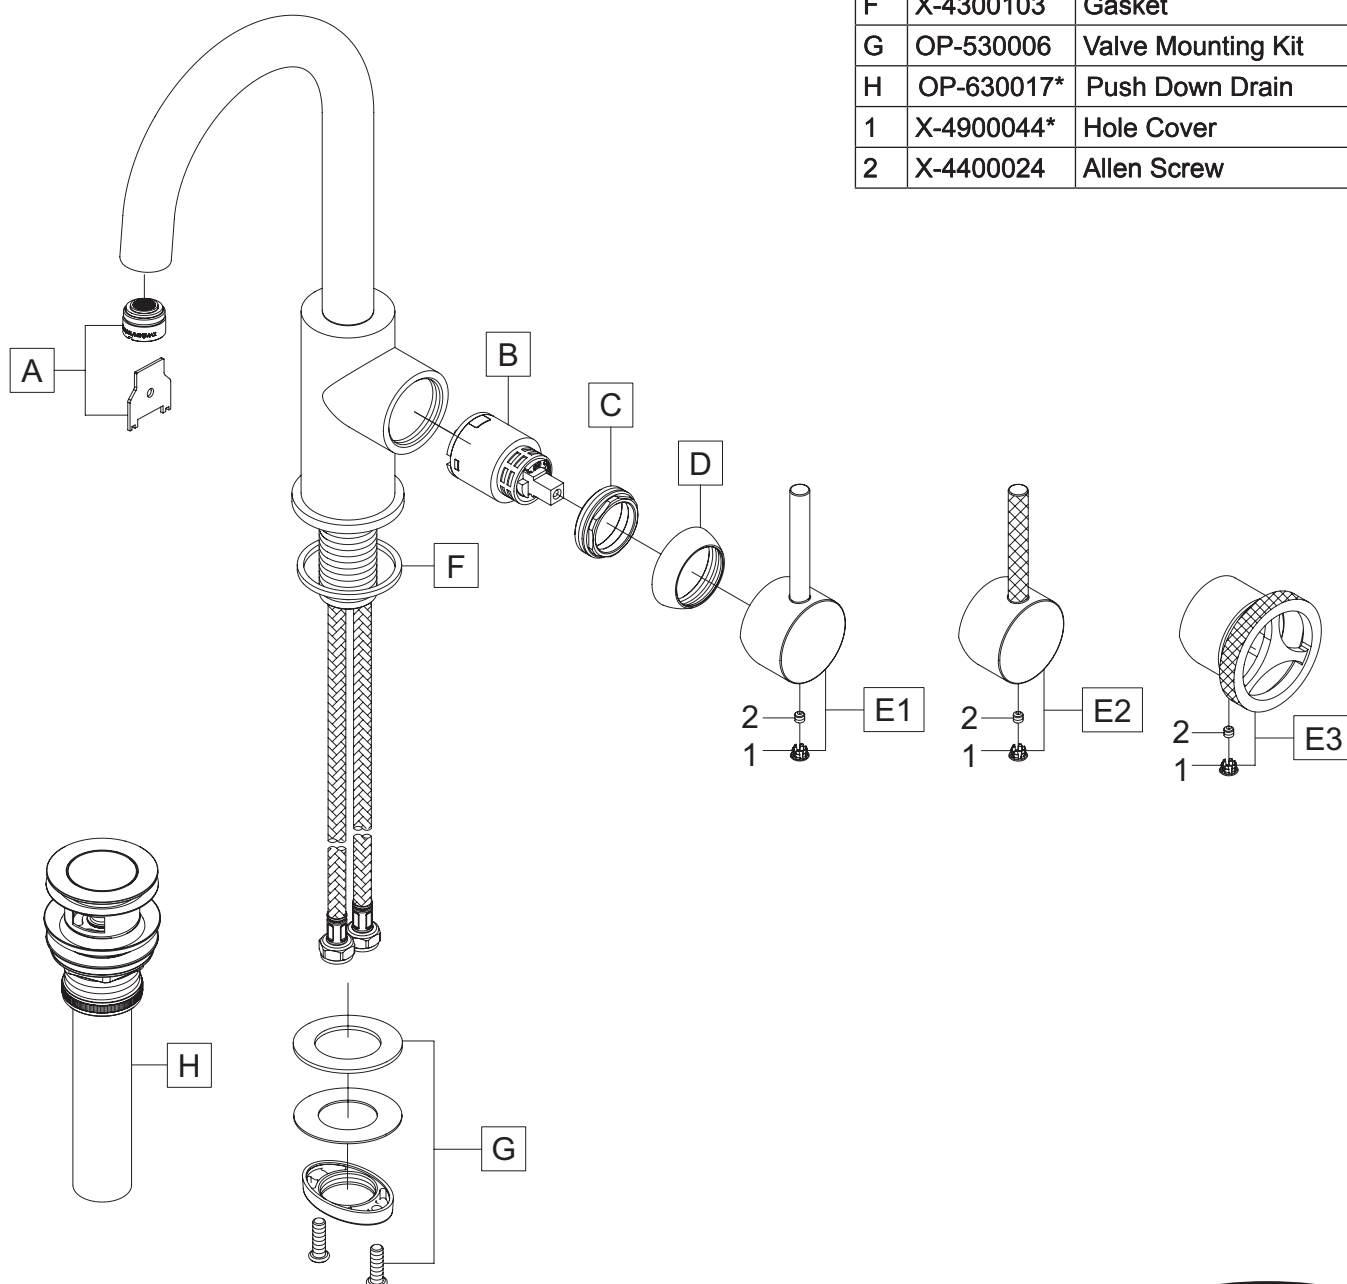

For more care information or trouble shooting inquiries
about your Pioneer product, please call:
Pioneer Industries, Inc. (800) 338-9468
Monday-Friday 8 AM to 8 PM EST (5 AM to 5 PM PST)
www.pioneerind.com