PART NUMBERS

112-5_{BP-SR}

112-5BN-SR

FINISH

BRIGHT POLISHED

BRUSHED NICKEL

STAINLESS STEEL STRAIGHT SHOWER ROD

- STAINLESS STEEL RECTANGLE STRAIGHT SHOWER ROD 1
- STAINLESS STEEL MOUNTING SCREWS 4
- STAINLESS STEEL SET SCREWS 2
- PLATED ZINC DIE-CAST WALL BRACKET 2
- ZINC DIE-CAST WALL BRACKETS AND ROD RECEIVERS 2


PATENTED T-PLUG DESIGN

- PATENTED DESIGN #USD752421s
- EASY ONE PERSON INSTALLATION

MAY BE CUT DOWN TO FIT ANY SIZE OPENING

TOTAL INSTALLED LENGTH OF THE STRAIGHT SHOWER ROD IS 60 INCHES

To cut the shower rod down please follow these instructions: Measure the total opening of the shower/ tub enclosure and subtract that number from 60 inches, the remaining number is what will need to be cut from the shower rod. Example: 58 inch opening minus 60 inches leaves 2 inches to cut. It is best to cut equal amounts off both ends, this insures a proper fit.

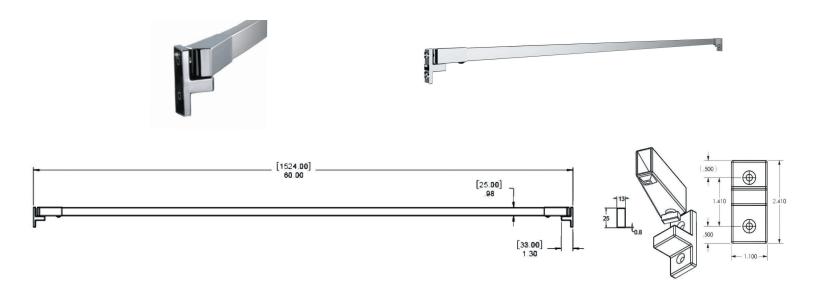

INSTALLATION:

Screw the wall brackets onto the wall first. Be sure to measure and level each wall bracket. Once complete attach the bar receivers to the wall brackets via the patented T-Plug and insert the shower rod approximately 2 inches into one of the mounted bar receivers. Slide the shower rod towards the second empty bar receiver mounted on the adjacent wall and insert approximately 1 inch. Use the provided set screws to lock everything in place.



WOOD BLOCKING IS THE PREFERRED METHOD OF INSTALLATION

Limited Warranty: