

Gimbals

AKTGP/AKTFLGR

One Line Voltage Lamp
up to 250W

DATE: _____ TYPE: _____

FIRM NAME: _____

PROJECT: _____

ArchiTrak

For conversion to millimeters,
multiply inches by 25.4
Not to Scale

APPLICATIONS:

Prescolite's complete offering of architectural front and rear load gimbals offers a wide variety of line voltage lamps up to 250W. Prescolite's gimbals are perfect for a range of commercial and retail applications.

TRACK FIXTURE:

Heavy gauge formed steel with knobless mounting. Rotates 110° vertically and 358° horizontally. Connector has solid copper contact bars, fixed for one or two circuit connection without modification. Baked enamel finish available in black, white, or zet (metallic silver).

LAMP:

See below.

SOCKET:


Porcelain socket wired with three 150°C wires (two circuit wires and ground) in fiberglass insulator sleeve.

INSTALLATION:

Easy installation onto ArchiTrak one/two circuit track.



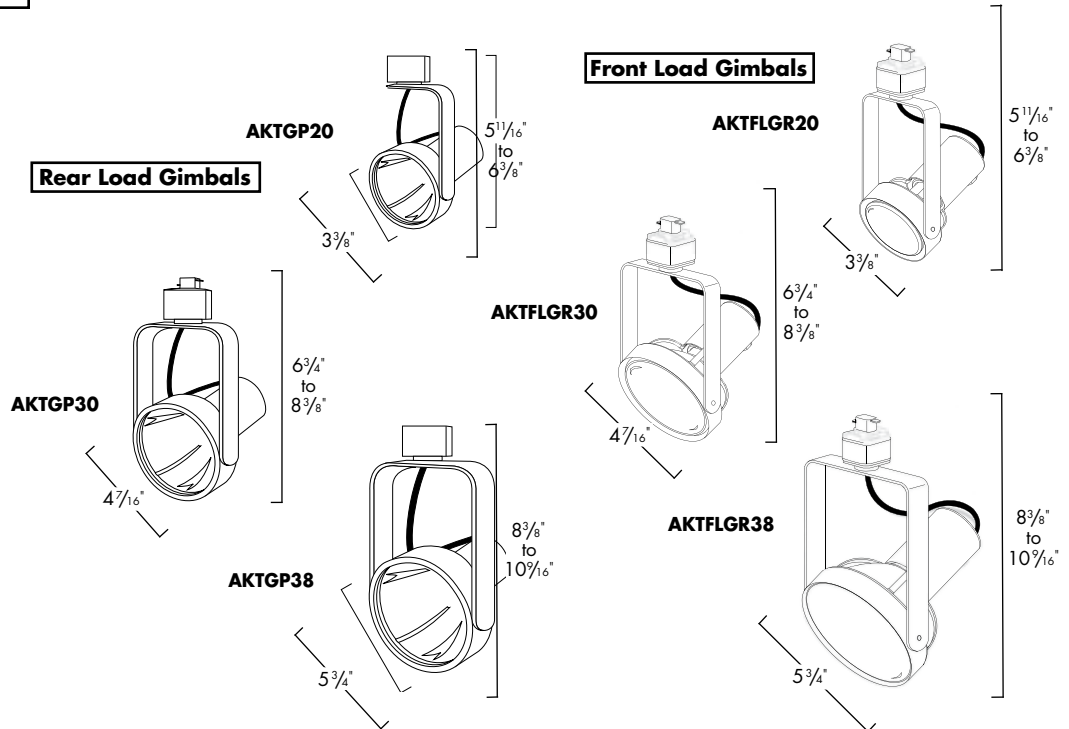


LABELS:

CSA US/C Listed



CATALOG NUMBER:

EXAMPLE: AKTFLGR20Z-AKTB20Z

TRACK FIXTURES (REAR LOAD ONLY) ³	TRACK FIXTURES (FRONT LOAD ONLY) ³	ACCESSORIES	ACCESSORIES
<input type="checkbox"/> AKTGP20 BL <input type="checkbox"/> AKTGP20 WH <input type="checkbox"/> AKTGP20 Z Line voltage gimbal, 50W PAR-20 lamp Max.	<input type="checkbox"/> AKTFLGR20 BL <input type="checkbox"/> AKTFLGR20 WH <input type="checkbox"/> AKTFLGR20 Z Line voltage gimbal, 20-50W PAR-20 lamp	 EGGCRATE LOUVER² <input type="checkbox"/> AKTE20 BL <input type="checkbox"/> AKTE20 WH <input type="checkbox"/> AKTE20 Z <input type="checkbox"/> AKTE30 BL <input type="checkbox"/> AKTE30 WH <input type="checkbox"/> AKTE30 Z	 LINEAR SPREAD LENS² <input type="checkbox"/> SL20 <input type="checkbox"/> SL30  DIFFUSION LENS² <input type="checkbox"/> DL20 <input type="checkbox"/> DL30
<input type="checkbox"/> AKTGP30 BL <input type="checkbox"/> AKTGP30 WH <input type="checkbox"/> AKTGP30 Z Line voltage gimbal, 75W PAR-30 lamp Max.	<input type="checkbox"/> AKTFLGR30 BL <input type="checkbox"/> AKTFLGR30 WH <input type="checkbox"/> AKTFLGR30 Z Line voltage gimbal, 50-75W PAR-30 lamp		COLOR FILTERS² AMBER <input type="checkbox"/> AML20 <input type="checkbox"/> AML30 BLUE <input type="checkbox"/> BLL20 <input type="checkbox"/> BLL30 GREEN <input type="checkbox"/> GRL20 <input type="checkbox"/> GRL30
<input type="checkbox"/> AKTGP38 BL <input type="checkbox"/> AKTGP38 WH <input type="checkbox"/> AKTGP38 Z Line voltage gimbal, 250W PAR-38 lamp Max.	<input type="checkbox"/> AKTFLGR38 BL <input type="checkbox"/> AKTFLGR38 WH <input type="checkbox"/> AKTFLGR38 Z Line voltage gimbal, 45-250W PAR-38 lamp		UV FILTER² <input type="checkbox"/> UV20 <input type="checkbox"/> UV30

Notes:

¹ Diameter dimension for accessories ending in 20 is 3 3/8"; for accessories ending in 30 is 4 3/4".

² **No accessories are available for AKTGP20, AKTFLGR20, AKTFLGR30, or AKTFLGR38.**

³ Track heads will accommodate one lens or filter and one louver.

All are supplied with clips to hold accessories.

ArchiTrak® - Line Voltage Gimbals
AKTGP20, AKTGP30, AKTGP38, AKTFLGR20, AKTFLGR30, AKTFLGR38



Web: www.prescolite.com • Tech Support: **(888) 777-4832**

701 Millennium Blvd., Greenville, SC 29607 U.S.A. • Phone (864) 678-1000

Prescolite is a division of Hubbell Lighting, Inc., with representatives' offices throughout North America

Copyright ©2009 Prescolite, All Rights Reserved • Specifications subject to change without notice. • Printed in U.S.A. • ATRK-004 • 6/10/09



Hubbell Lighting, Inc.