

Specifications

PF4001LS

ACCUFIT® Pressure Balance Tub and Shower Faucet Valve



Product Features

- ACCUFIT® Pressure balance valve less stops
- One-piece cartridge design for ease of maintenance
- Ceramic disc valve cartridge
- Back-to-back capability
- Forged brass valve body
- Optional air test cap available
- Adjustable temperature limit stop
- IAPMO Approved
- Quick remove plaster guard
- Easy mounting brackets
- Meets or exceeds ASSE 1016-P standards (anti-scald)

Model Numbers

- PF4001LS** Ceramic disc tub and shower valve without stops MIP and SWT
- PF4001CLS** Ceramic disc tub and shower valve without stops CPVC connection
- PF4001FLS** Ceramic disc tub and shower valve without stops FIP
- PF4001PLS** Ceramic disc tub and shower valve without stops PEX ASTM F1807 crimp connector
- PF4001WPLS** Ceramic disc tub and shower valve without stops PEX ASTM F1960 Uponor (Wirsbo) connector

Available Parts

- ACF4001UCRT** Replacement cartridge assembly
- ACF4001AIR** Air test cap
- ACF4001GRD2** Plaster guard
- ACF4001EXTCP** Deep rough extension kit CP
- ACF4001EXTZBN** Deep rough extension kit BN
- ACF4001EXTORB** Deep rough extension kit ORB
- ACF4001EXTPN** Deep rough extension kit PN


Flow Rates (Gallons per minute)

Pressure (psi)	20psi	40psi	60psi	80psi
Rate (gpm)	3.46	5.02	6.34	7.26

All product traffic data is an average.

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. This PROFLO faucet carries a limited lifetime warranty when installed in residential applications. The warranty is five years in commercial applications. This product meets ASME A112.18.1/CSA B125.1 and ASSE 1016-P.

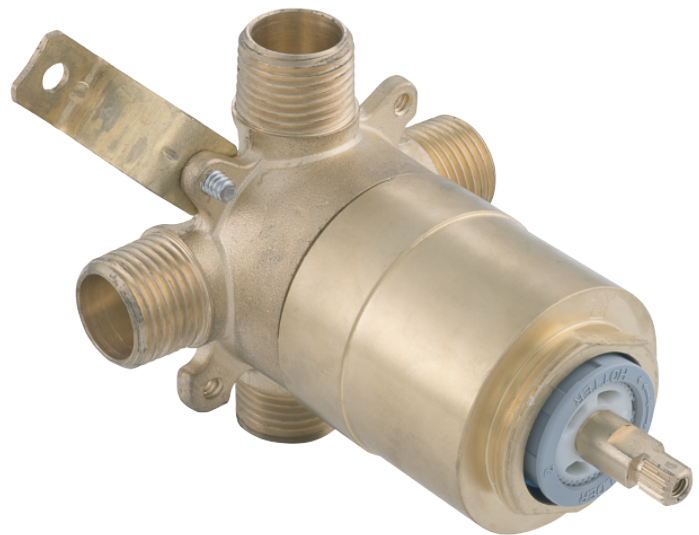

PF4001LS



Specifications


PF4001LS

ACCUFIT® Pressure Balance Tub and Shower Faucet Valve



Product Specifications

	A (in)	A (mm)
PF4001LS	3-3/8	85
PF4001CLS	4-7/16	113
PF4001FLS	3-3/8	85
PF4001PLS	4-9/16	116
PF4001WPLS	4-13/16	123

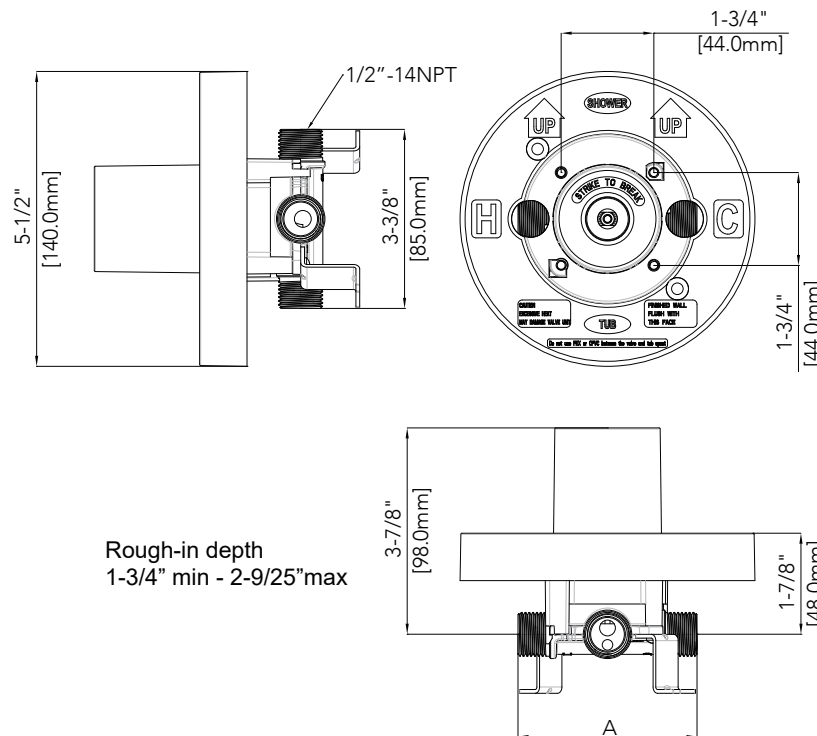

Important Note

Pressure Balancing Valves, regardless of brand, are generally not recommended for use with tankless (on-demand) water heaters. Pressure Balancing Valves adjust to the lowest incoming water pressure. Because outgoing hot-water pressure of tankless water heaters can sometimes be significantly lower than household cold-water pressure, the result can be unsatisfactory water pressure in the shower.