

PF4001LS/PF4001CLS/PF4001FLS/ PF4001PLS/PF4001WPLS ACCUFIT® PRESSURE BALANCE TUB AND SHOWER FAUCET VALVE WITH STOP




Product Features

- ACCUFIT® Pressure balance valve with integral stops
- One-piece cartridge design for ease of maintenance
- Ceramic Disc Cartridges
- Back-to-back capability
- Forged brass valve body
- Optional air test cap available
- Adjustable temperature limit stop
- Quick remove plaster guard
- Easy mounting brackets

Optional Parts

ACF4001AIR	Air test cap
ACF4001EXT*	Deep rough extension kit
ACF4001GRD2	Plaster guard
ACF4001STOP	Stop valve
ACF4001UCRT	Replacement cartridge assembly

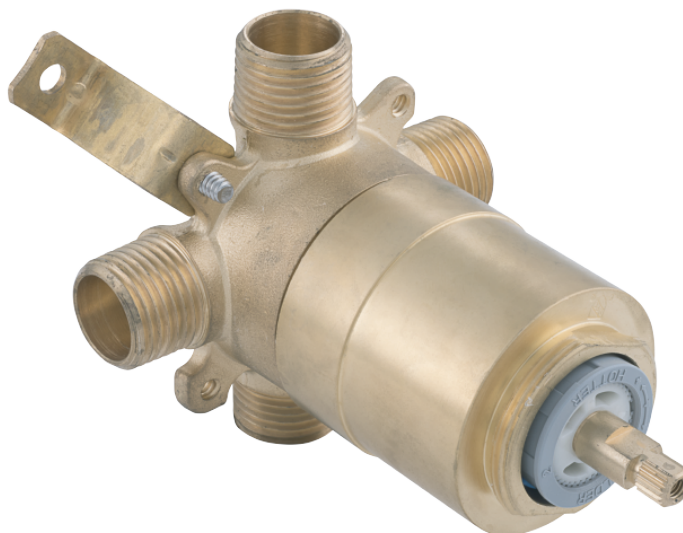

Codes and Certifications

PF4001LS



- Certified to ASME A112.18.1 / CSA B125.1
- cUPC/IAPMO listed
- Meets or exceeds ASSE 1016-P standards (anti-scald)

Product Specifications

PF4001LS	Ceramic disc tub and shower valve without stops MIP and SWT
PF4001CLS	Ceramic disc tub and shower valve without stops CPVC connection
PF4001FLS	Ceramic disc tub and shower valve without stops FIP
PF4001PLS	Ceramic disc tub and shower valve without stops PEX ASTM F1807 crimp connector
PF4001WPLS	Ceramic disc tub and shower valve without stops PEX ASTM F1960 Uponor (Wirsbo) connector

Flow Rates (Gallons per minute)


Pressure (psi)	20 psi	40 psi	60 psi	80 psi
Rate (gpm)	3.46	5.02	6.34	7.26

For detailed warranty information, visit ferguson.com/proflo-faucet-warranty.

**PF4001LS/PF4001CLS/PF4001FLS/
PF4001PLS/PF4001WPLS
ACCUFIT® PRESSURE BALANCE
TUB AND SHOWER FAUCET VALVE WITH STOP**



	A (in)	A (mm)
PF4001LS	3-3/8	85
PF4001CLS	4-7/16	113
PF4001FLS	3-3/8	85
PF4001PLS	4-9/16	116
PF4001WPLS	4-13/16	123

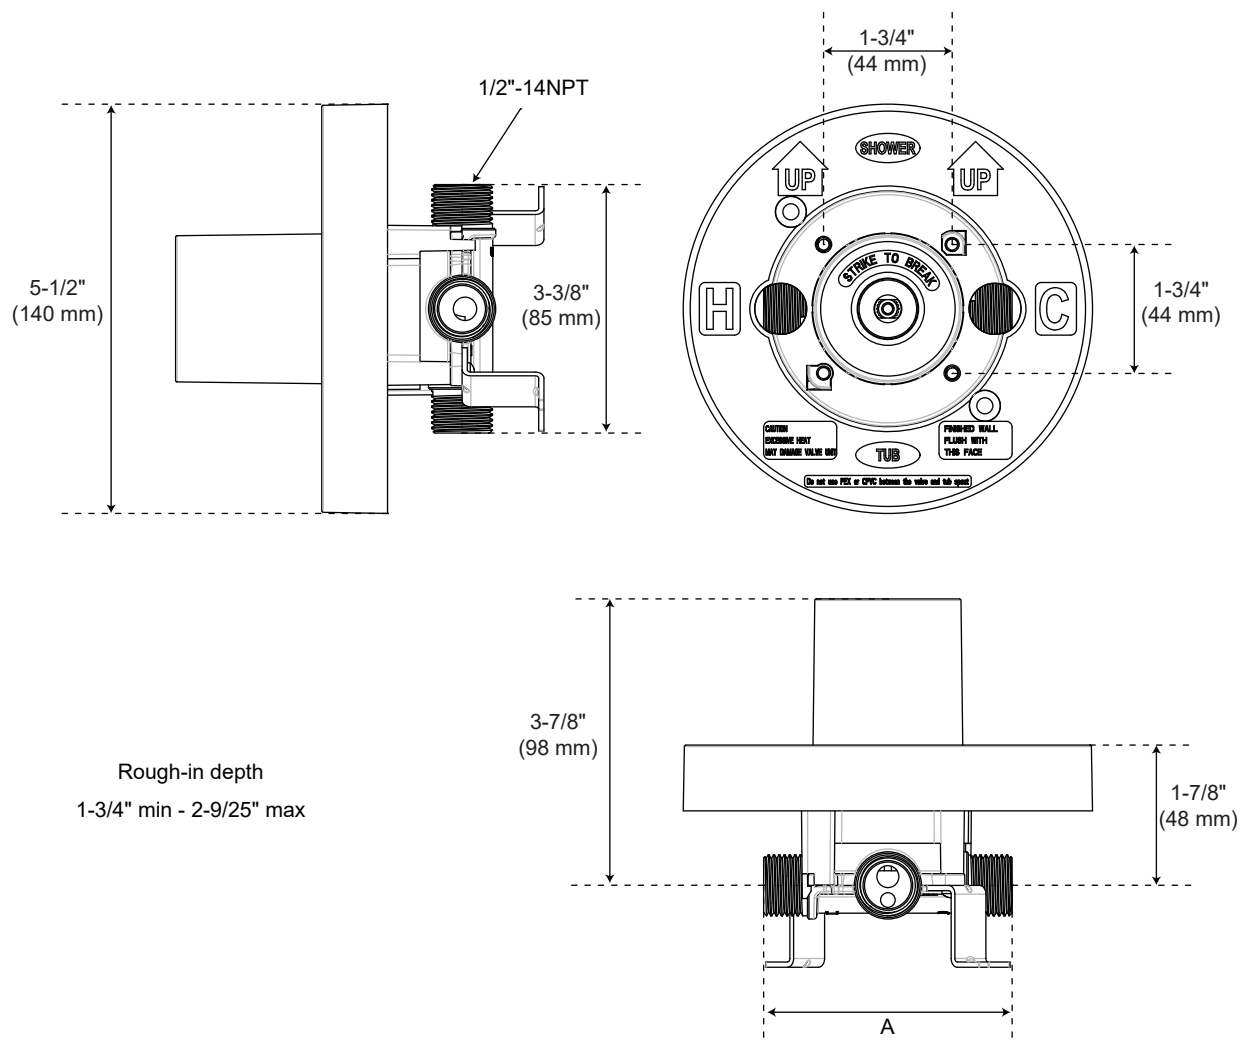

For detailed warranty information, visit ferguson.com/proflo-faucet-warranty.