



LF Female Compression Tee Water Hammer Arrestor

Product Features

- For single fixture use
- Helps to eliminate shock waves generated in piping systems by sudden on/off changes in flow
- Compression x Female Compression designed to install either between stub out and supply stop or between supply stop and supply tube for dishwashers, faucets, toilets or ice makers
- Polypropylene piston
- AA arrestors are suitable for 1-3 fixture units
- May be installed at any angle.
- To function more effectively, please install within 6 feet of the fixture the arrestor is servicing.
- Can be installed in systems without need for access panels*

*Always check local plumbing codes to determine if access panels are required.
Sweat version not to be used in conjunction with copper propress system due to brass connection.


Product Specifications

Temperature Range: 33°F to 180°F
Max. Working Pressure: 350 PSI
ASSE 1010-2004
IAMPO Listed (cUPC)
Certified to NSF 372 requirements

Model Numbers	A	B	C
PFXWHACTCA	3/8" OD Compression Tee X 3/8" OD Female Compression	3-7/8" (98.4mm)	2-3/8" (58.7mm)
PFXWHACTD	5/8" OD Compression Tee X 5/8" OD Female Compression	3-7/8" (98.4mm)	2-1/2" (63.5mm)



PFXWHACTCA

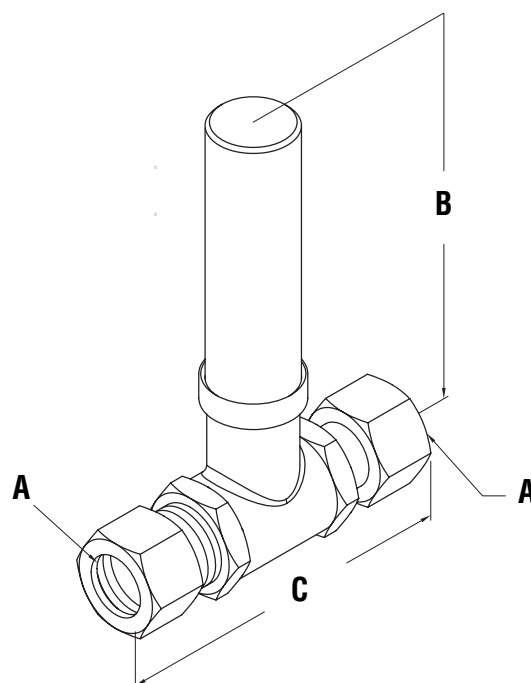

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.

