### *Lansford series 60" x 36" Drop-in baths*



## Whirlpool & Soaking

### Features


- Durable easy-care acrylic construction
- Textured slip-resistant bottom
- Eight adjustable, color matched hydro jets, including two lumbar jets
- Safety suction and silent air induction
- Available as an invigorating whirlpool and an unjetted soaking bath
- · Air activated on/off switch
- Available in White (WH) and Biscuit (BS)


### **General Specifications**


- 60" length overall
- 36" width overall
- 19 1/2" overall height
- 52 gallon total capacity to overflow
- Pre-wired for simple plug-in installation
- Requires a single 115V/20 amp GFCl circuit




PFWPLUSA6036NWH

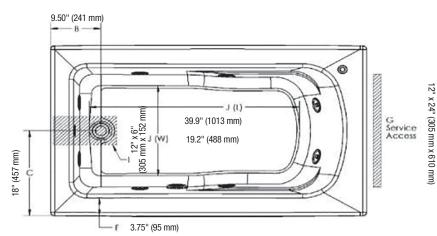

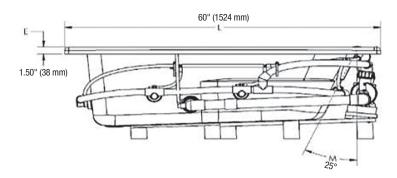







### Product Specifications

## *Lansford series 60" x 36" Drop-in baths*



# Whirlpool & Soaking

### **Model Numbers**

PFWPLUSA6036N	60" x 36" acrylic whirlpool
PFS6036N	60" x 36" acrylic soaking bath
PFSK60	5' removable apron
PFTLK	Tile flange kit

#### **Recommended Parts**

MB644BN	17-22 PVC Cable drain w/ trim - BN
MB644CP	17-22 PVC Cable drain w/ trim - CP
MB6440RB	17-22 PVC Cable drain w/ trim - ORB
MB644PN	7-22 PVC Cable drain w/ trim - PN
MB643BN	17-22 ABS Cable drain w/ trim - BN
MB643CP	17-22 ABS Cable drain w/ trim - CP
MB6430RB	17-22 ABS Cable drain w/ trim - ORB
MB643PN	17-22 ABS Cable drain w/ trim - PN

#### Warranty and Codes

This product features a 5-year limited warranty and meets or exceeds the following standards: Whirlpools - IAPMO PS32-84, UL listing 1795, ANSI Z124.1-95, ASME A112.19.8M-87R(96) and ASME A112.19.7M-95. Baths - ANSI Z124.1-95. In an effort to continually improve our products, design changes may periodically be made. Ferguson reserves the right to provide newly designed material to fill any order unless otherwise agreed to in writing.

