

Specifications

PFHS212 HAND SHOWER



Product Features

- Five-function hand shower: outer, outer / inner, inner / center, center, full
- ABS construction
- Maximum flow rate 1.75 gpm (6.6 L/min) at 80 psi
- G1/2 connection



Codes and Certifications



- Certified to ASME A112.18.1 / CSA B125.1
- WaterSense Certified



PFHS212CP

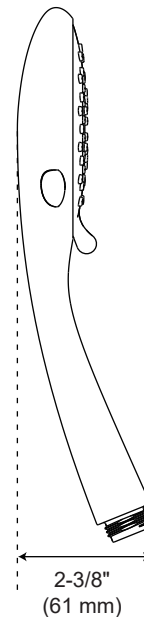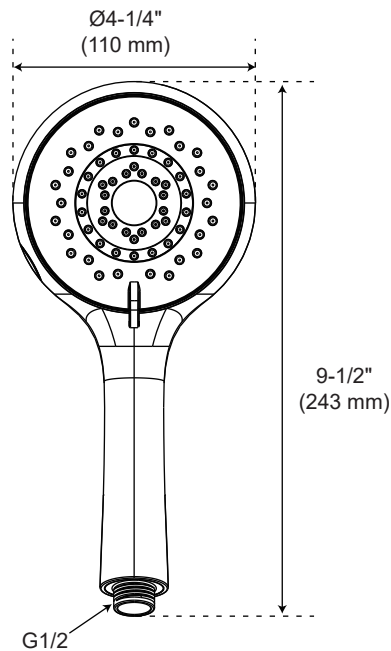

For detailed warranty information, visit ferguson.com/proflo-faucet-warranty.