

Specifications

PF1835AWH

High-Efficiency Urinal Siphon Jet, Rear Outlet



Product Features

- Vitreous china
- High-efficiency urinal (HEU)
- Siphon jet flushing (0.5 gpf - 1.0 gpf / 1.9 lpf - 3.8 lpf)
- 3/4" top inlet spud
- 2" NPT inside thread outlet
- Hanging bracket included
- Flush valve not included

Codes and Standards

- ADA
- IAPMO/UPC
- ASME A112.19.2
- CSA
- EPA WaterSense
 - *WaterSense compliant when used with a 0.5 gpf WaterSense compliant flush valve

Included Components

- Mounting brackets
- Inlet spud
- Outlet spud



PF1835AWH

Specified Model

Model	Model Description	Color Finishes
PF1835AWH	Siphon jet, 3/4" top spud, rear outlet white	White (WH)

Technical Information

Fixture	
Configuration	Siphon jet urinal
Gallons per flush	0.5gpf-1.0gpf/1.9lpf-3.8lpf
Spud size	3/4" top
Passageway	2" outlet

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. All PROFLO fixtures carry a 1-year limited warranty. This product meets or exceeds ASME/ANSI A112.19.2M. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless we agree in writing to do otherwise. Meets the Americans Disabilities Act guidelines and ANSI A11.17.1 when installed to 17" height from finished floor.



Specifications


PF1835AWH

High-Efficiency Urinal Siphon Jet, Rear Outlet



Product Specifications

Siphon jet urinal shall be made of vitreous china with a 3/4" top spud. Urinal shall include inlet and spuds and brackets. Urinal shall use 0.5 gpf - 1.0 gpf (1.9 lpf - 3.8 lpf). Urinal shall be PROFLO model PF1835. Recommended working pressure between 25 and 80 psi. Provide suitable reinforcement for wall support.

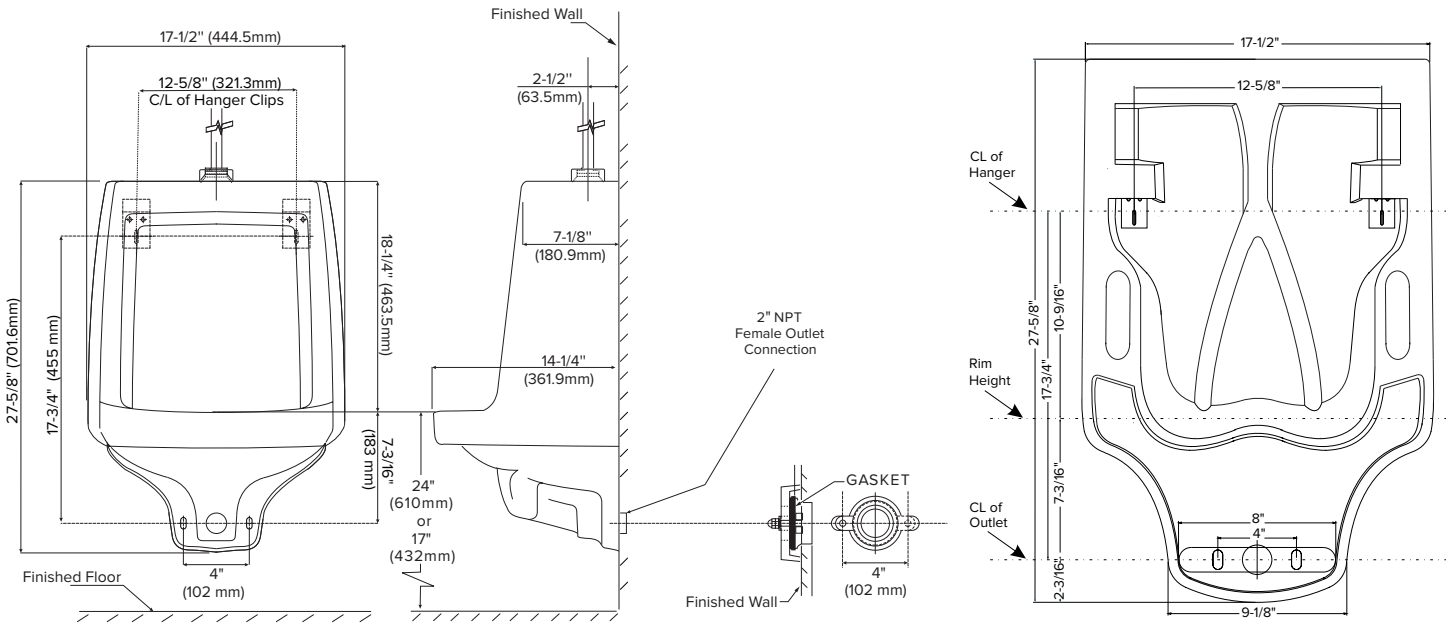

* All measurements are nominal. Please verify before actual installation.

