

## Specifications

# PFXE200CP LUBEC COMMERCIAL SENSOR LAVATORY FAUCET



### Product Features


- Touch-free deck-mounted electronic faucet
- Activated by concealed sensor in spout
- Solid one-piece brass body
- Cold or premixed water
- Choose your power (6 - AA batteries or 110V plug). Battery box and transformer are included (batteries not included)
- Filter included
- External latching solenoid valve
- Low battery indicator
- Adjustable sensor settings: Sensor range, security time, delay in, delay out, on-off, factory reset. Remote control required - sold separately. Factory settings will suffice for most applications and users. In the rare case that custom settings are desired, the optional remote control indicated below is required
- The faucet is automatically activated when the user places their hands in the sensor range and stops when the user removes their hands from the sensor range



### Product Specifications

- Vandal-resistant aerator
- Power supply options: (6) AA batteries or 9V transformer (Battery box and 9V transformer included. Batteries not included.)
- Operating pressure: 0.5-8.0 bar/7.0-116.0 psi
- Water supply: Cold or premixed water
- Water saving options: 0.5 gpm (default), 0.35 gpm (OBPF508510066)
- Water temperature: 70°C maximum
- Security time: Auto shutoff after 90 seconds, adjustable by remote control
- Sensor: Infrared convergence-type proximity sensor

**PFXE200CP**

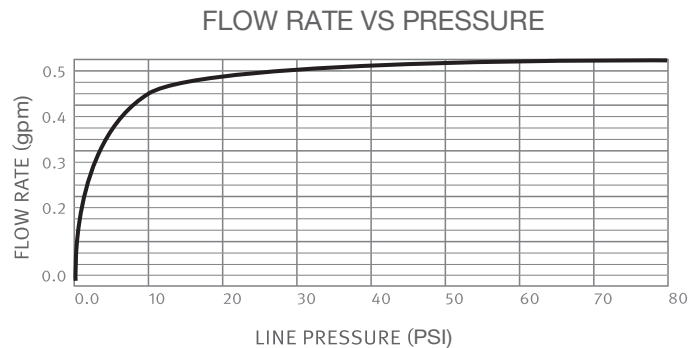

This graph applies to 0.5 gpm option only.

### Optional Accessories/Available Parts

- OBPF107270290** Deck plate
- OBPF508510066** 0.35 gpm aerator
- PFXEREMOTE** Remote control


### Codes and Certifications



- Certified to ASME A112.18.1 / CSA B125.1
- cUPC/IAPMO listed
- ADA compliant

# Specifications

## **PFXE200CP LUBEC COMMERCIAL SENSOR LAVATORY FAUCET**

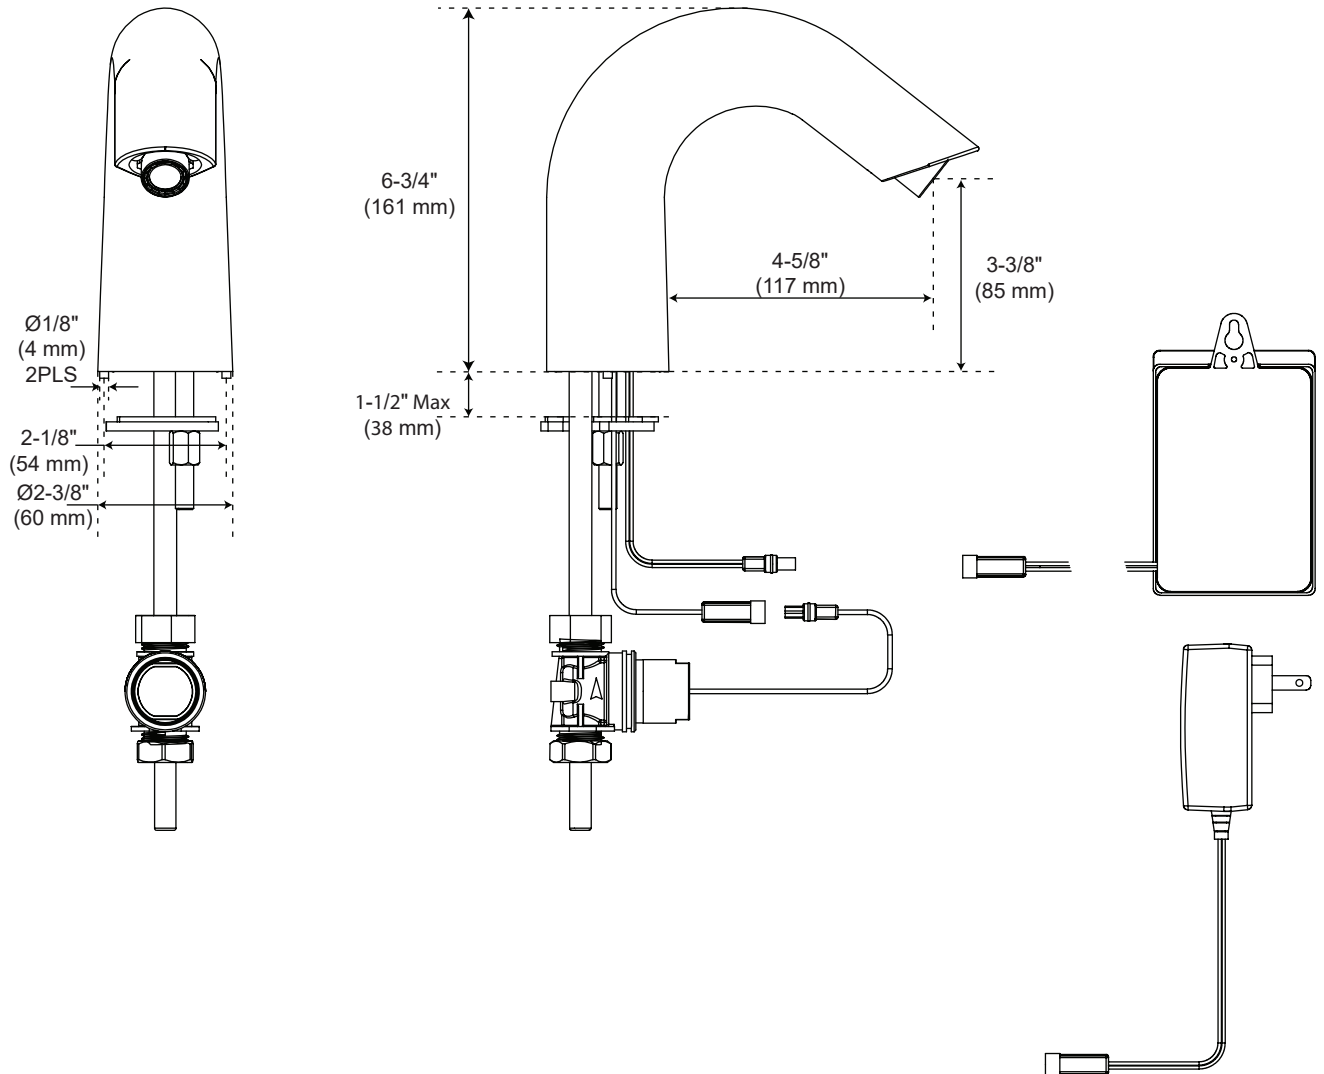

For detailed warranty information, visit [ferguson.com/proflo-faucet-warranty](https://ferguson.com/proflo-faucet-warranty).