

Specifications

Gilpin Series

High-Efficiency Toilet Pressure Assist - 1.0 gpf



Product Features

- Two-piece vitreous china
- 1.0 gpf HET, high-efficiency toilet with pressure assist
- Equipped with EcoFlush Pressure Assist System
- 2" fully glazed trapway
- Siphon jet technology
- Large 13-1/2" x 11" water surface
- Available in round front, elongated and ADA
- Close coupled tank with cover
- Only available in white
- Seat and supply not included
- Uses 35% less water than standard (1.6 gpf) low-flow toilets

Specified Model

- PF1600PAWH** 1.0 gpf round front bowl
- PF1601PAWH** 1.0 gpf elongated bowl
- PF1603PAWH*** 1.0 gpf ADA bowl
- PF1612PAWHA** 1.0 gpf pressure assist tank with chrome trip lever
- PF1612PARWHA** 1.0 gpf pressure assist tank with RH trip lever
- PF1612PALWHA** 1.0 gpf pressure assist tank with locking lid
- PF1610PAWHA** 1.0 gpf pressure assist tank, 10" RI

* Complies with ADA.

Codes and Certifications

- IAPMO/UPC
- CSA B45.1-18
- EPA WaterSense
- ADA
- ASME A112.19.2



PF1601PAWH/PF1612PAWHA

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. This PROFLO toilet carries a 5-year limited warranty on the tank fittings and a limited lifetime warranty on the porcelain. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless we agree in writing to do otherwise.



Specifications


Gilpin Series

High-Efficiency Toilet Pressure Assist - 1.0 gpf



Product Specifications

The combination toilet shall be made of vitreous china. Toilet shall be 1.0 gpf (3.8 lpf). Toilet shall have 2" (5.1cm) glazed trapway. Toilet shall be less seat and supply.

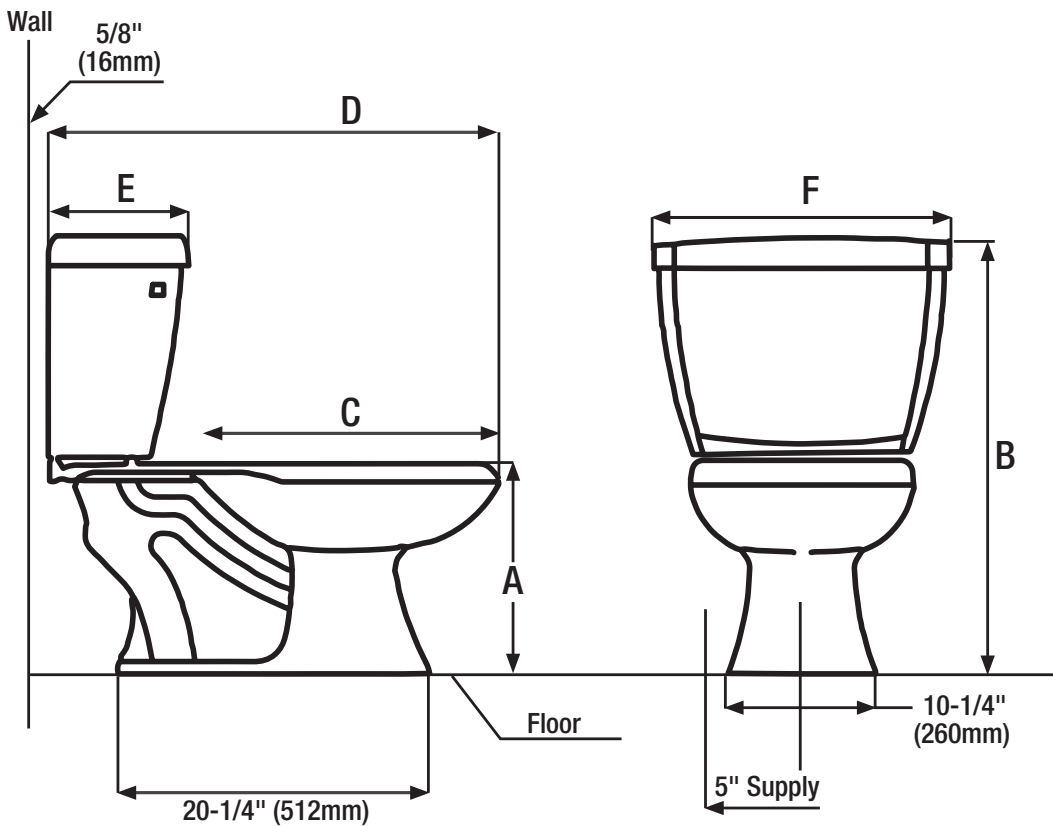

	RF	EL	ADA
A	14-1/8"	14-1/2"	17"
B	29-1/8"	29-3/8"	31-7/8"
C	16-1/2"	18-1/4"	18-1/4"
D	29-1/8"	31-1/8"	31-1/8"

	PF1612	PF1610
E	9-1/6"	8-3/8"
F	21"	20-7/8"

Note: All dimensions and specifications are nominal and may vary: Dimensions of 8" and greater have a tolerance of +3%. Dimensions less than 8" have a tolerance of +5%.

