

PFFTP100 / PFFTP200 Series

Plastic SJ Tubular P Trap




Product Features

- Material: Poly Propylene and PVC/ABS
- All Necessary Parts Included
- IAPMO Listed



PFFTP100

✓ For Submittal	Model Number	Description	Adapter		Dimisions								Color	Flange
					A		B		C		D			
			Style	Material	in	mm	in	mm	in	mm	in	mm		
	PFPTP100	1-1/4 X 1-1/2 Plastic SJ Tubular P Trap	Marvel	PVC	12 1/4	311.2	4 5/8	117.5	3 1/2	88.9	8 3/4	222.3	White	N/A
	PFPTP101	1-1/4 X 1-1/2 Plastic SJ Tubular P Trap	Marvel	ABS	12 1/4	311.2	4 5/8	117.5	3 1/2	88.9	8 3/4	222.3	Black	N/A
	PFPTP102	1-1/4 X 1-1/2 Plastic SJ Tubular P Trap	Marvel	ABS	12 1/4	311.2	4 5/8	117.5	3 1/2	88.9	8 3/4	222.3	WH/BLK	N/A
	PFPTP104	1-1/4 Plastic SJ Tubular P Trap	N/A	N/A	11 1/4	285.8	4 5/8	117.5	3 1/2	88.9	7 3/4	196.9	White	N/A
	PFPTP105	1-1/2 Plastic SJ Tubular P Trap	Solvent Weld	PVC	12 1/4	311.2	4 5/8	117.5	3 1/2	88.9	8 3/4	222.3	White	Deep Box
	PFPTP200	1-1/4 X 1-1/2 Plastic SJ Tubular P Trap	N/A	N/A	12 1/4	311.2	4 5/8	117.5	3 1/2	88.9	8 3/4	222.3	Chrome	Deep Box

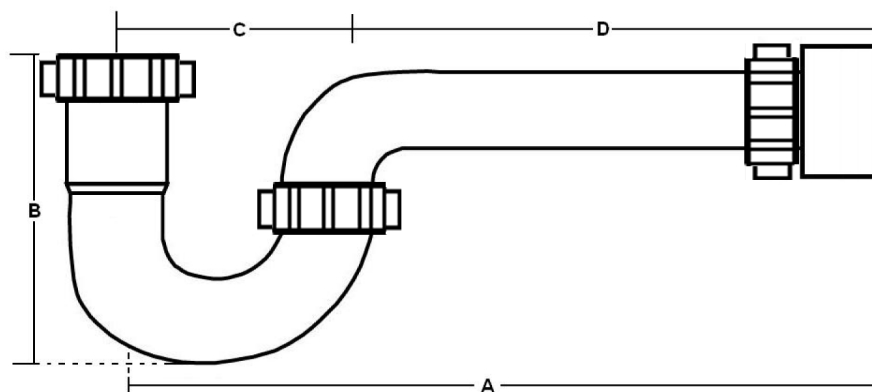

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.



Specifications

PFX146

Stainless Steel and PVC Faucet Reinforced Flexible Connectors



Product Features

- Working Temperature: 40°F – 140°F
- Working Pressure: Up to 125 PSI maximum
- Internal Hose: Reinforced PVC
- Outer Wire Braid: 304 stainless steel (not applicable to PVC connectors PFX146022, PFX146023, PFX146024)
- Barb: Low lead brass alloy
- Metal Nuts: Nickel-plated brass alloy
- Ferrule: Nickel-plated brass alloy
- Washer: Santoprene rubber

Installation Instructions

- For use with water in accessible locations only
- Metal Nuts: Hand-tighten plus 1/4 turn with wrench
- Do not overtighten nuts
- Check for leaks before leaving jobsite
- Inspect regularly for general fitness and replace if damaged, corroded or worn
- Do not expose to corrosive chemicals

Models and Product Certifications

Model #	Description	cUPC	UPC	Low Lead
PFX146022	3/8" COMP X 1/2" FIP X 12" PVC Faucet	✓	✓	✓
PFX146023	3/8" COMP X 1/2" FIP X 16" PVC Faucet	✓	✓	✓
PFX146024	3/8" COMP X 1/2" FIP X 20" PVC Faucet	✓	✓	✓
PFX146302	1/2" FIP X 1/2" FIP X 12" SS Faucet	✓	✓	✓
PFX146303	1/2" FIP X 1/2" FIP X 16" SS Faucet	✓	✓	✓
PFX146304	1/2" FIP X 1/2" FIP X 20" SS Faucet	✓	✓	✓
PFX146306	1/2" FIP X 1/2" FIP X 30" SS Faucet	✓	✓	✓
PFX146322	3/8" COMP X 1/2" FIP X 12" SS Faucet	✓	✓	✓
PFX146323	3/8" COMP X 1/2" FIP X 16" SS Faucet	✓	✓	✓
PFX146324	3/8" COMP X 1/2" FIP X 20" SS Faucet	✓	✓	✓
PFX146326	3/8" COMP X 1/2" FIP X 30" SS Faucet	✓	✓	✓



PFX146322



PFX146430



PFX146302



PFX146024

Model #	Description	cUPC	UPC	Low Lead
PFX146330	3/8" COMP X 1/2" FIP X 48" SS Faucet	✓	✓	✓
PFX146332	3/8" COMP X 1/2" FIP X 60" SS Faucet	✓	✓	✓
PFX146334	3/8" COMP X 1/2" FIP X 72" SS Faucet	✓	✓	✓
PFX146342	3/8" COMP X 3/8" COMP X 12" SS Faucet	✓	✓	✓
PFX146343	3/8" COMP X 3/8" COMP X 16" SS Faucet	✓	✓	✓
PFX146344	3/8" COMP X 3/8" COMP X 20" SS Faucet	✓	✓	✓
PFX146423	1/2" COMP X 1/2" FIP X 16" SS Faucet	✓	✓	✓
PFX146424	1/2" COMP X 1/2" FIP X 20" SS Faucet	✓	✓	✓
PFX146430	3/8" COMP X 3/8" OD COUP X 12" SS Faucet	✓	✓	✓
PFX146432	3/8" COMP X 3/8" OD COUP X 20" SS Faucet	✓	✓	✓

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.
IAPMO listed to ASME A112.18.6-2017/CSA B125.6-17.
IAPMO listed to NSF/ANSI 61-2018.



Specifications

PFXQ Series

Lead-Free Quarter-Turn Supply Stops



Product Features

- Chrome-plated stops
- Lead-free brass body
- Lead-free brass stem
- Lead-free brass ball mechanism
- Angle, straight and 3-way stops available
- Operating pressure: 125 psi maximum
- Operating temperature: 40°F–160°F
- Quarter-turn operation
- Blowout-proof stem

Codes and Certifications

- cUPC approved
- ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN 61
- NSF 372- Low Lead

Model Numbers

Angle Stops

PFXQAT32C*	LF 1/2 FIP X 3/8 COMP ANG ST QT CP
PFXQAC32C*	LF 5/8 COMP X 3/8 COMP ANG ST QT CP
PFXQAP32C	LF 1/2 PEX X 3/8 COMP ANG ST QT CP
PFXQAS32C*	LF 1/2 SWT X 3/8 COMP ANG ST QT CP
PFXQAT22C	LF 3/8 FIP X 3/8 COMP ANG ST QT CP
PFXQAT32C	LF 1/2 FIP X 3/8 COMP ANG ST QT CP
PFXQAV32C	LF 1/2 CPVC X 3/8 COMP ANG ST QT CP
PFXQAC32CLK*	LF 5/8X3/8 OD COMP QT ANG ST L/K CP
PFXQAJ34C	LF 5/8 OD X 7/16 & 1/2 SJ ANG ST CP

Straight Stops

PFXQSC32C*	LF 5/8 X 3/8 COMP STRT ST QT CP
PFXQSP32C	LF 1/2 F1807 PEX X 3/8OD QT STRT ST
PFXQSS32C*	LF 1/2 SWT X 3/8 COMP STRT ST QT CP
PFXQST22C	LF 3/8 FIP X 3/8 COMP STRT ST QT CP
PFXQST32C	LF 1/2 FIP X 3/8 COMP STRT ST QT CP
PFXQSV32C	LF 1/2 CPVC X 3/8 COMP STRT ST QT

3-Way Stops

PFXQ3C322C*	LF 3/8 COMP X 5/8 COMP 3W ST QT CP
--------------------	------------------------------------


*For copper tube use only.



PFXQAT32C



PFXQAC32C



PFXQSC32C

Warranty and Codes

This PROFLO product carries a 1-year limited warranty. ASME A112.18.1-2005/CSA B125.1-05.

