

Specifications

Gilpin Series

High-Efficiency Toilet Pressure Assist – 1.0 gpf



Product Features

- Two-piece vitreous china
- 1.0 gpf HET, high-efficiency toilet with pressure assist
- Equipped with Sloan Flushmate® IV System
- 2" fully glazed trapway
- Siphon jet technology
- Meets ANSI ASME A112.19.14-2006 and ASME A112.19.2M
- Large 13-1/2" x 11" water surface
- Available in round front, elongated and ADA
- Close coupled tank with cover
- Only available in white
- Seat and supply not included
- Uses 35% less water than standard (1.6 gpf) low-flow toilets



PF1601PAWH / PF1612PARWH

Optional Accessories / Available Parts

FC100500K	Replacement cartridge for 1612 tank
FBL100504K	Lower supply kit
FBU100505K	Upper supply kit
FE205288	Tank-to-bowl gasket
PF129837	Flush handle and rod for RH tank
PF129838	Flush handle and rod for LH tank
PF1612PALIDWH	Replacement lid

Specified Model

PF1600PAWH	1.0 gpf round front bowl
PF1601PAWH	1.0 gpf elongated bowl
PF1603PAWH	1.0 gpf ADA bowl
PF1612PAWH	1.0 gpf pressure assist tank with chrome trip lever
PF1612PARWH	1.0 gpf pressure assist tank with RH trip lever
PF1612PALWH	1.0 gpf pressure assist tank with locking lid
PF1610PAWH	1.0 gpf pressure assist tank, 10" RI

Technical Information	
Configuration	Two-piece toilet
Water per flush	1.0 gpf/3.8 lpf
Trapway	2" fully glazed
Water area	13-1/2" x 11"
Seat post hole centers	5 1/2"

Codes and Standards

- ADA
- IAPMO/UPC
- ASME A112.19.2
- CSA B45.1-18

Meets the Americans with Disabilities Act (ADA) guidelines and ANSI A117.1 requirements for accessible and usable building facilities when installed so that the top of the seat is at a height of 17"-19" from the finished floor.
Flushmate service # 1-800-533-3450.



Specifications


Gilpin Series

High-Efficiency Toilet Pressure Assist – 1.0 gpf



Product Specification

The combination toilet shall be made of vitreous china. Toilet shall be 1.0 gpf (3.8 lpf). Toilet shall have 2" (5.1cm) glazed trapway. Toilet shall be less seat and supply.

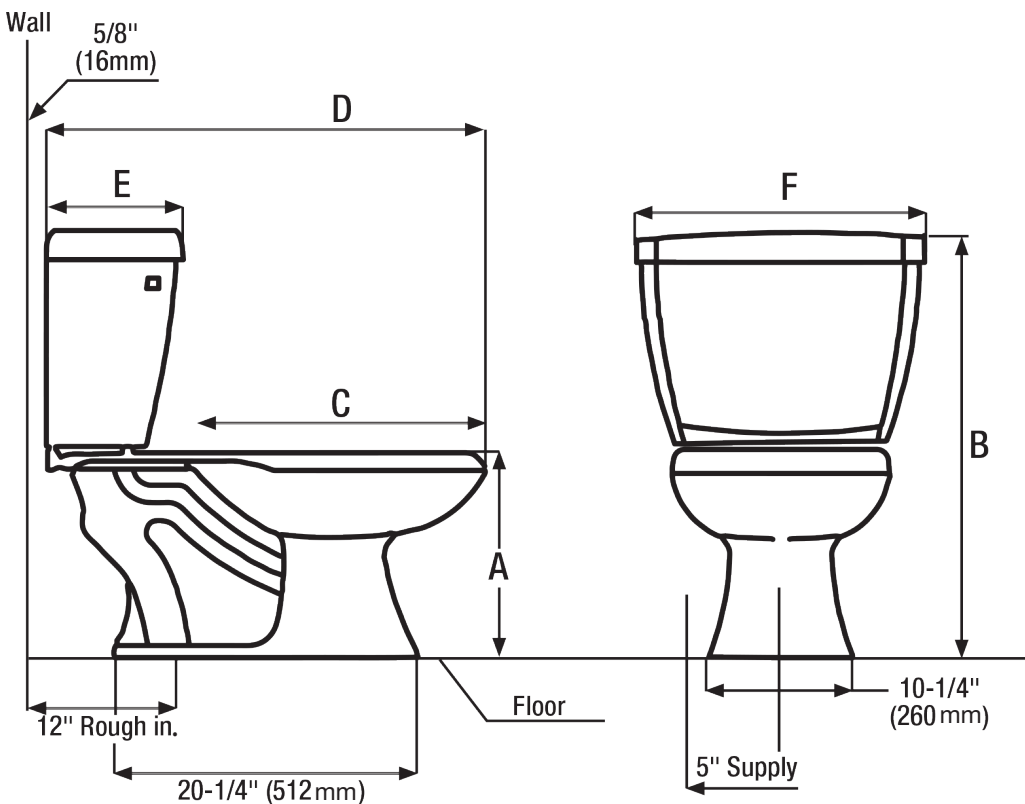

	RF	EL	ADA
A	14-1/8"	14-1/2"	17"
B	29-1/8"	29-3/8"	31-7/8"
C	16-1/2"	18-1/4"	18-1/4"
D	29-1/8"	31-1/8"	31-1/8"

	PF1612	PF1610
E	9-1/6"	8-3/8"
F	21"	20-7/8"

Warranty and Codes

This product comes complete with installation, operating, care and maintenance instructions. This PROFLO toilet carries a 5-year limited warranty on the tank fittings and a limited lifetime warranty on the porcelain. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless we agree in writing to do otherwise.

Note: All dimensions and specifications are nominal and may vary: Dimensions of 8" and greater have a tolerance of +3%. Dimensions less than 8" have a tolerance of +5%.

