

PF1200 Series

Two-Piece Toilet Vitreous China



Product Features

- Two-piece vitreous china, available 10", 12", 14" RI
- Stylish tank design
- Gravity fed (1.6gpf/6.0Lpf)
- Box rim with integral jets
- 2" glazed trapway
- 8" x 9" water surface
- Close coupled tank with cover
- Anti-siphon ballcock prevents back-siphoning
- Sanitary bar on all bowls
- Quick connect, 2 bolt tank to bowl installation
- Color matched trip lever
- Available with Fluidmaster upgrade
- Available with RH trip lever
- Available with insulated tank
- Available round front, elongated and ADA
- Seat and supply not included



PF1203WH / PF3112WH

Codes and Standards

- ADA
- IAPMO/UPC
- ASME A112.19.2
- CSA B45.0
- CSA B45.1

Technical Information

Fixture is ADA compliant.	ADA
Fixture:	
Configuration	two-piece toilet
Water per flush	1.6 gpf/6.0 lpf
Spud size	N/A
Passageway	2" glazed
Water area	8" X 9"
Water depth from rim	6 1/2"
Seat post hole centers	5 1/2"

Specified Model

Model	Model Description	Color Finishes
PF1200	Bowl only box rim RF	○ White ○ Biscuit ○ Bone
PF1201	Bowl only box rim EB	○ White ○ Biscuit ○ Bone
PF1203	Bowl only box rim ADA	○ White ○ Biscuit ○ Bone
PF3112	Tank only 12" RI for 1200 series	○ White ○ Biscuit ○ Bone
PF3312	Tank with Fluidmaster 400A, for 12" RI	○ White ○ Biscuit ○ Bone
PF3110	Tank only 10" RI for 1200 series	○ White ○ Biscuit ○ Bone
PF3114	Tank only 14" RI for 1200 series	○ White ○ Biscuit ○ Bone
PF140934PK	Ballcock assy F/PF 3112 tank	○ White ○ Biscuit ○ Bone

add "R" to tank for RH tank lever (3112 only)
add "U" to tank for insulated tank (3112 only)




PF1200 Series

Two-Piece Toilet Vitreous China



Product Specification:

The combination toilet shall be made of vitreous china. Toilet shall be 1.6 gpf (6.0 lpf). Toilet shall have 2" (5.1cm) glazed trapway. Toilet shall include color matched trip lever. Toilet shall be less seat and supply. Toilet shall be ADA compliant (PF1203) with 17" high bowl.

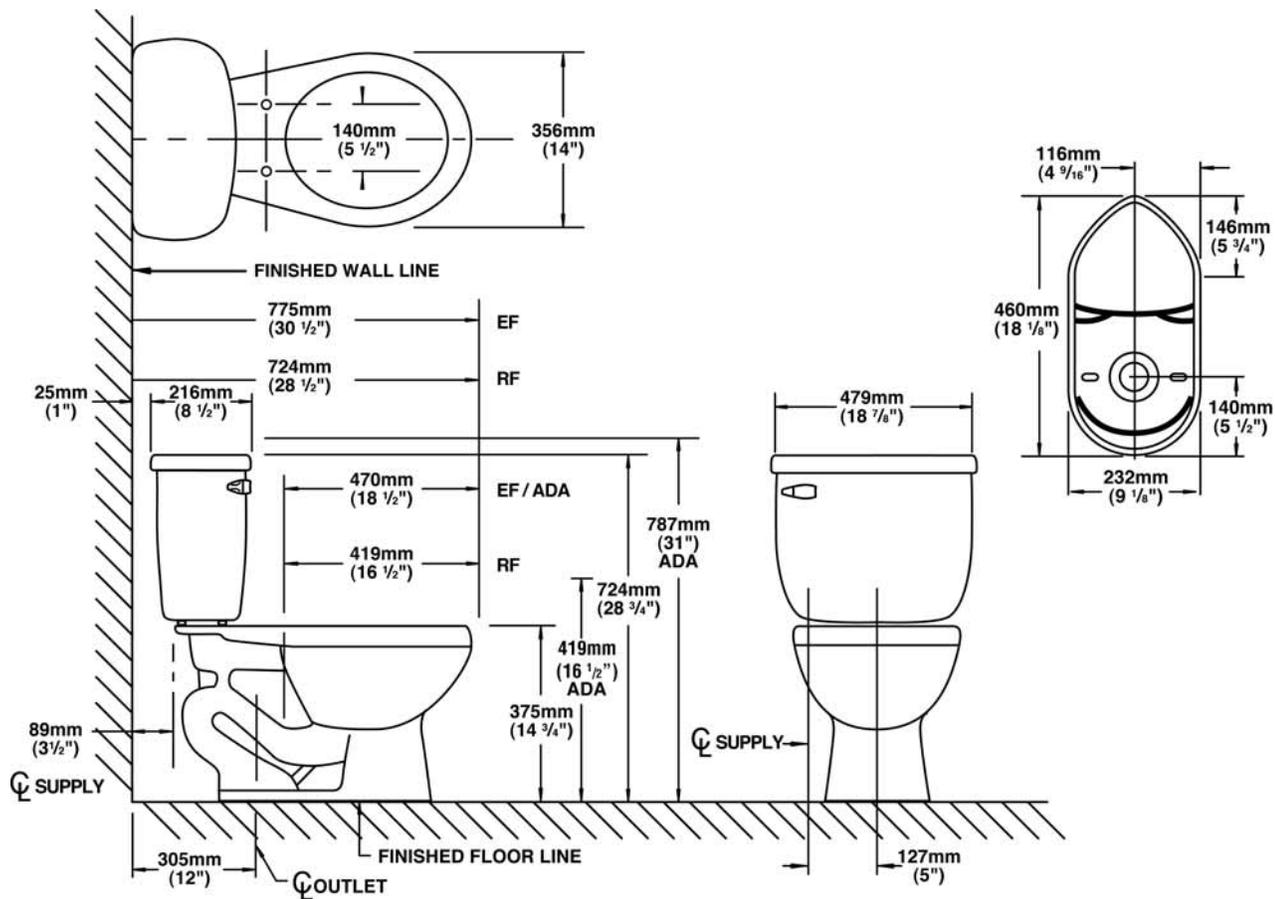

Warranty and Codes:

This product comes complete with installation, operating, care and maintenance instructions. All PROFLO fixtures carry a 1-year limited warranty. This product meets or exceeds ASME/ANSI A112.19.2M. In an effort to continually improve our products, we will make design changes from time to time. We reserve the right to ship newly designed product to fill any order unless we agree in writing to do otherwise.

