

## Specifications

### PFXQ Series

# Lead-Free Quarter-Turn Supply Stops



#### Product Features

- Chrome plated stops
- Lead-free brass body
- Lead-free brass stem
- Lead-free brass ball mechanism
- Angle, straight and 3-way stops available
- Operating pressure: 125psi maximum
- Operating temperature: 40°F-160°F
- Quarter-turn operation
- Blowout-proof stem

#### Codes and Certifications

- cUPC approved
- ASME A112.18.1/CSA B125.1
- NSF/ANSI/CAN 61
- NSF 372- Low Lead

#### Model Numbers

##### Angle Stops

<b>PFXQAT32C*</b>	LF 1/2 FIP X 3/8 COMP ANG ST QT CP
<b>PFXQAC32C*</b>	LF 5/8 COMP X 3/8 COMP ANG ST QT CP
<b>PFXQAP32C</b>	LF 1/2 PEX X 3/8 COMP ANG ST QT CP
<b>PFXQAS32C*</b>	LF 1/2 SWT X 3/8 COMP ANG ST QT CP
<b>PFXQAT22C</b>	LF 3/8 FIP X 3/8 COMP ANG ST QT CP
<b>PFXQAT32C</b>	LF 1/2 FIP X 3/8 COMP ANG ST QT CP
<b>PFXQAV32C</b>	LF 1/2 CPVC X 3/8 COMP ANG ST QT CP
<b>PFXQAC32CLK*</b>	LF 5/8X3/8 OD COMP QT ANG ST L/K CP
<b>PFXQAJ34C</b>	LF 5/8 OD X 7/16 & 1/2 SJ ANG ST CP

##### Straight Stops

<b>PFXQSC32C*</b>	LF 5/8 X 3/8 COMP STRT ST QT CP
<b>PFXQSC32C</b>	LF 5/8 X 3/8 COMP STRT ST QT CP
<b>PFXQSP32C</b>	LF 1/2 F1807 PEX X 3/8OD QT STRT ST
<b>PFXQSS32C*</b>	LF 1/2 SWT X 3/8 COMP STRT ST QT CP
<b>PFXQST22C</b>	LF 3/8 FIP X 3/8 COMP STRT ST QT CP
<b>PFXQST32C</b>	LF 1/2 FIP X 3/8 COMP STRT ST QT CP
<b>PFXQSV32C</b>	LF 1/2 CPVC X 3/8 COMP STRT ST QT

##### 3-Way Stops

<b>PFXQ3C322C*</b>	LF 3/8 COMP X 5/8 COMP 3W ST QT CP
--------------------	------------------------------------


\*For use copper tube only.



**PFXQAT32C**



**PFXQAC32C**

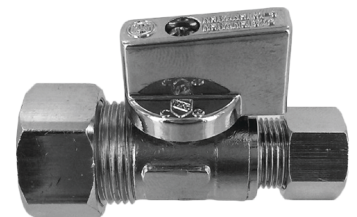

**PFXQSC32C**

#### Warranty and Codes

This PROFLO product carries a 1-year limited warranty. ASME A112.18.1-2005/CSA B125.1-05.

