

PFCBV

CPVC Ball Valves



Product Features

- Operating temperature: 150psi @ 73.2F
- Valve Port Opening : Reduced Port
(1/2"~1" are FULL PORT DESIGN; 1-1/4"~2" are with reduced port)
- Solvent weld connection
- For use with hot or cold water
- NSF Specifications : NSF 61-G
- Valve Seat Material : EPDM

Model Numbers

PFCBVD	PFCBVH
PFCBVF	PFCBVJ
PFCBVG	PFCBVK





PFCBVD

Product Specifications

NO.	PART	MATERIAL	QTY
1	Body	CPVC	1
2	Seat Seal	EPDM	2
3	Ball	CPVC	1
4	O-Ring	EPDM	1
5	Handle	ABS	1
6	Bolt	ZINC-PLATED STEEL	1
7	Cap	ABS	1

CTS DIM	PFCBVD	PFCBVF	PFCBVG	PFCBVH	PFCBVJ	PFCBVK
NOM. SIZE	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"
D	1.26	1.56	2.05	2.24	2.48	3.11
D1	0.94	1.18	1.50	1.77	2.13	2.58
d	0.49	0.79	1.02	0.98	1.18	1.42
d1	0.63	0.88	1.14	0.98	1.62	2.13
d2	0.62	0.87	1.12	1.39	1.64	2.13
L	2.68	3.27	3.74	4.17	4.49	5.69
L1	2.36	2.76	3.46	3.93	3.94	4.29
H	1.93	2.48	3.11	3.66	3.86	4.53
H1	1.34	1.69	2.13	2.56	2.64	3.07
I	0.5	0.7	0.9	1.11	1.26	1.69

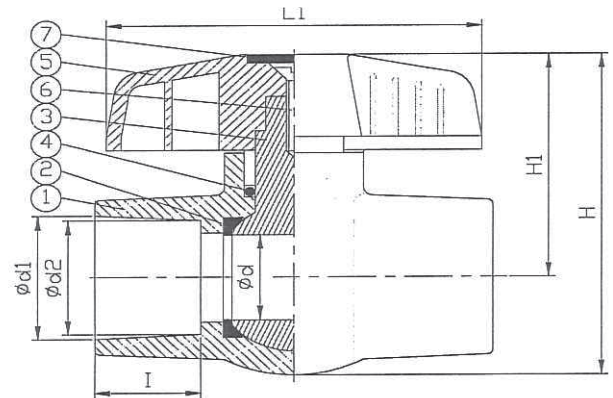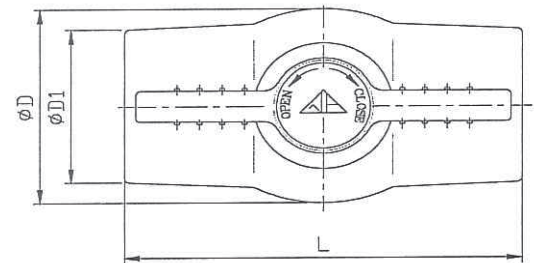

**Not for use with compressed air or gases*

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.



Certified to NSF/ANSI 61-G

Distributed Exclusively by Ferguson and Wolsley Canada

CAP 2013/11