

PFPSBV Series

PVC Solvent Weld Ball Valves



Product Features

- Pressure rating: 150 PSI at 73.4° F (23° C)
- Low flow loss
- Socket diameter confirms to ASTM D2467
- Not for use with compressed air or gases

Model Numbers

- PFPSBVD PFPSBVH PFPSBVL
 PFPSBVF PFPSBVJ PFPSBVM
 PFPSBVG PFPSBVK PFPSBVP





PFPSBVD

MODEL NO. SIZE	PFPSBVD 1/2" (12.7mm)	PFPSBVF 3/4" (19.01mm)	PFPSBVG 1" (25.4mm)	PFPSBVH 1-1/4" (31.7mm)	PFPSBVJ 1-1/2" (38.1mm)	PFPSBVK 2" (50.8mm)	PFPSBVL 2-1/2" (63.5mm)	PFPSBVM 3" (76.2mm)	PFPSBVP 4" (101.6mm)
A	38	49	57	63	75	92	110	133	170
B	30	38	45	54	62	77	92	106	135
C	83	95	106	114	130	147	204	229	300
D (L)	70	86	100	100	109	134	178	224	276
E (JIS)	22.30	26.30	32.33	38.43	48.46	60.56	76.60	89.60	114.70
E (ANSI)	21.54	26.87	33.65	42.42	48.56	60.63	73.38	89.31	114.76
E (DIN)	20.3	25.3	32.3	40.3	50.3	63.3	75.3	90.3	110.4
E (BS)	21.5	26.9	33.7	42.4	48.4	60.5	75.5	89.1	114.5
F (JIS)	21.7	25.7	31.67	37.57	47.54	59.44	75.87	88.83	113.98
F (ANSI)	21.23	26.57	33.27	42.04	48.11	60.17	72.85	88.7	114.07
F (DIN)	20.1	25.1	32.1	40.1	50.1	63.1	75.1	90.1	110.1
F (BS)	21.3	26.7	33.5	42.2	48.2	60.3	75	88.9	114.2
G (DIN)	16	19	22	26	31	38	44	51	61
G (ANSI, JIS)	22.22	25.4	28.57	31.75	34.93	38.1	44.45	47.63	57.15
H	14	20	25	30	36	46.5	58	77	98
I	43	54	65	67	78	89	105	124	148
J	62	78	93	98	115	135	160	190	223

Product Specifications

NO.	PART	MATERIAL	QTY
1	Body	PVC	1
2	Seat Seal	EPDM,PTFE	2
3	Ball	PVC	1
4	O-Ring	EPDM,FPM	1
5	Handle	ABS	1
6	Bolt	ZINC-PLATED STEEL	1
7	Cap	ABS	1

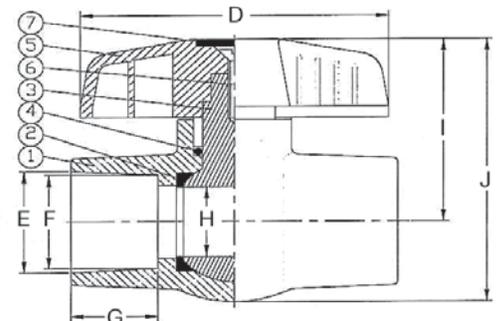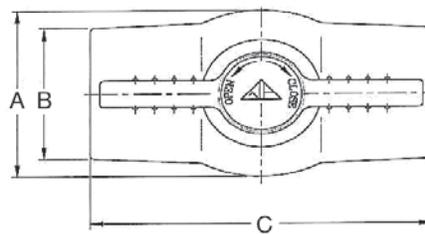

Warranty and Codes

This PROFLO product carries a 1-year limited warranty.